

| | | |
|----------|---|----------------|
| 1 | Function | TECS-15 |
| 1.1 | Input voltage range | TECS-15 |
| 1.2 | Inrush current limiting | TECS-15 |
| 1.3 | Overcurrent protection | TECS-15 |
| 1.4 | Overvoltage protection | TECS-15 |
| 1.5 | Output ripple and ripple noise | TECS-15 |
| 1.6 | Isolation | TECS-15 |
| 1.7 | Reducing standby power | TECS-15 |
| 2 | Wiring Input/Output Pin | TECS-16 |
| 3 | Series / Parallel and Redundancy Operation | TECS-16 |
| 3.1 | Series operation | TECS-16 |
| 3.2 | Parallel and redundancy operation | TECS-16 |
| 4 | Temperature Measurement Point | TECS-17 |
| 5 | Life Expectancy and Warranty | TECS-18 |
| 6 | Option and Others | TECS-20 |
| 6.1 | Outline of options | TECS-20 |
| 6.2 | Others | TECS-23 |

1 Function

1.1 Input voltage range

- The range is from 85VAC to 264VAC.
In cases that conform with safety standard, input voltage range is 100VAC to 240VAC (50/60Hz).
When DC input is required, Please contact us.
- If input value doesn't fall within above range, a unit may not operate in accordance with specifications and/or start hunting or fail.
If you need to apply a square waveform input voltage, which is commonly used in UPS and inverters, please contact us.
- When the input voltage changes suddenly, the output voltage accuracy might exceed the specification. Please contact us.
If the restart time of the short interruption power failure is less than 3 seconds, perform a thorough evaluation.
- A power factor improvement circuit (active filter) is not built-in. If you use multiple units for a single system, standards for input harmonic current may not be satisfied. Please contact us for details.

1.2 Inrush current limiting

- An inrush current limiting circuit is built-in.
- If you need to use a switch on the input side, please select one that can withstand an input inrush current.
- Thermistor is used in the inrush current limiting circuit. When you turn the power ON/OFF repeatedly within a short period of time, please have enough intervals so that a power supply cools down before being turned on.

1.3 Overcurrent protection

- An overcurrent protection circuit is built-in and activated over 105% of the rated current. A unit automatically recovers when a fault condition is removed.
Please do not use a unit in short circuit and/or under an overcurrent condition.
- Hiccup Operation Mode
When the output voltage drops at overcurrent, the average output current is reduced by hiccup operation of power supply.
Please contact us for details.

1.4 Overvoltage protection

- An overvoltage protection circuit is built-in. If the overvoltage protection circuit is activated, shut down the input voltage, wait more than 3 minutes and turn on the AC input again to recover the output voltage. Recovery time varies depending on such factors as input voltage value at the time of the operation.

Remarks :

Please avoid applying a voltage exceeding the rated voltage to an output terminal. Doing so may cause a power supply to malfunction or fail. If you cannot avoid doing so, for example, if you need to operate a motor, etc., please install an external diode on the output terminal to protect the unit.

1.5 Output ripple and ripple noise

- The specified ripple and ripple noise are measured by the method introduced in Fig.1.1.
- Capacitors C_0 and C_1 should be hybrid electrolytic capacitors, ceramic capacitors, or other capacitors with good high frequency characteristics. The output ripple voltage may be affected by the ESR/ESL of the capacitor or the wiring impedance.

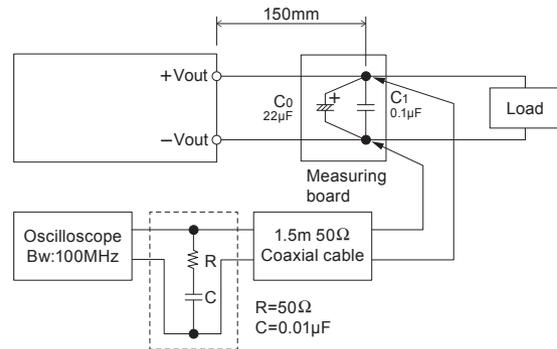


Fig.1.1 Measuring method of Ripple and Ripple Noise

Remarks :

When GND cable of probe with flux of magnetic force from power supply are crossing, ripple and ripple noise might not be measured correctly.
Please note the measuring environment.

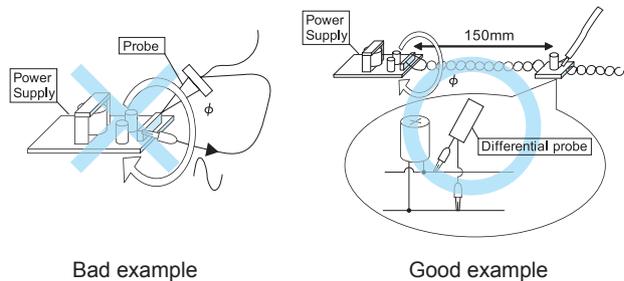


Fig.1.2. Example of measuring output ripple and ripple noise

1.6 Isolation

- For a receiving inspection, such as Hi-Pot test, gradually increase (decrease) the voltage for the start (shut down). Avoid using Hi-Pot tester with the timer because it may generate voltage a few times higher than the applied voltage, at ON/OFF of a timer.
- During isolation test between input and output, make short circuits at the input and output in each.

1.7 Reducing standby power

- Burst operation at light loading, the internal switch element is intermittent operated, and the switching power loss is decreased.
(Standby power of 230VAC input : 0.1W typ at TECS10F/20F, 0.2W typ at TECS45F/65F)
Burst operation can cause sound noise.

2 Wiring Input/Output Pin

■ The TECS series basically does not require an output capacitor, but the ripple voltage can be reduced by connecting an output capacitor.




Fig.2.1 Connecting example of an external capacitor to the output side

■ If output current decreases rapidly, output voltage rises transiently and the overvoltage protection circuit may operate. In this case, please install an external capacitor C_o between +Vout and -Vout pins for stable operation of the power supply.

■ Connectable external capacitor on the output side is shown in Table 2.1.

Table 2.1 Connectable external capacitor on the output side (TECS10F/20F)

| No. | Output voltage | TECS10F/TECS20F |
|-----|----------------|-------------------|
| 1 | 5V | 0 - 6,800 μ F |
| 2 | 12V | 0 - 4,700 μ F |
| 3 | 15V | 0 - 3,300 μ F |
| 4 | 24V | 0 - 1,000 μ F |

Table 2.2 Connectable external capacitor on the output side (TECS45F/65F)

| No. | Output voltage | TECS45F/TECS65F |
|-----|----------------|-------------------|
| 1 | 5V | 0 - 6,800 μ F |
| 2 | 12V | 0 - 4,700 μ F |
| 3 | 24V | 0 - 1,000 μ F |

■ When connect the output to FG of an equipment, a noise may become big. The noise can be reduced by connecting external filter and/or grounding capacitor on the input side.

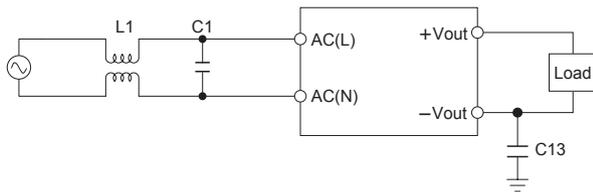


Fig.2.2 Recommended circuit of connect output to FG (TECS10F/20F)

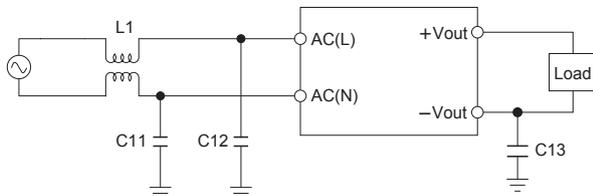


Fig.2.3 Recommended circuit of connect output to FG (TECS45F/65F)

3 Series / Parallel and Redundancy Operation

3.1 Series operation

■ You can use power supplies in series operation. The output current in series operation should be lower than the rated current of a power supply with the lowest rated current among power supplies that are serially connected. Please make sure that no current exceeding the rated current flows into a power supply.

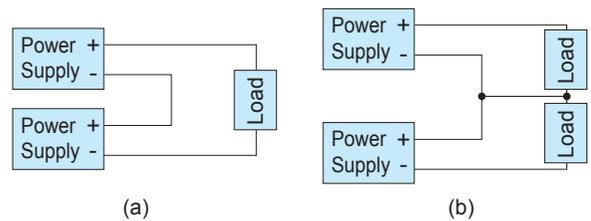


Fig.3.1 Examples of connecting in series operation

3.2 Parallel and redundancy operation

■ Parallel operation is not possible.

■ Redundancy operation is available by wiring as shown below.

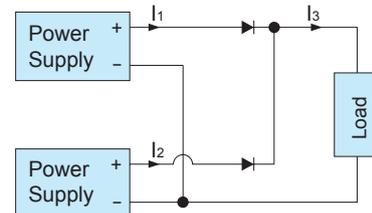


Fig.3.2 Example of redundancy operation

■ Even a slight difference in output voltage can affect the balance between the values of I_1 and I_2 .

Please make sure that the value of I_3 does not exceed the rated current of a power supply.

$$I_3 \leq \text{the rated current value}$$

4 Temperature Measurement Point

- It is necessary to note thermal fatigue life by power cycle.
Please reduce the temperature fluctuation range as much as possible when the up and down of temperature are frequently generated.
- Please have sufficient ventilation to keep the temperature of point ① in Fig.4.1 - 4.3 at Table4.1 - 4.4 or below. Please also make sure that the ambient temperature does not exceed 70°C (TECS10F/20F is 85°C).
- The life expectancy in the upper bound temperature is two years or more.
- Please be careful of electric shock or earth leakage in case of temperature measurement, because Point ① is live potential.
- Please contact us for details.

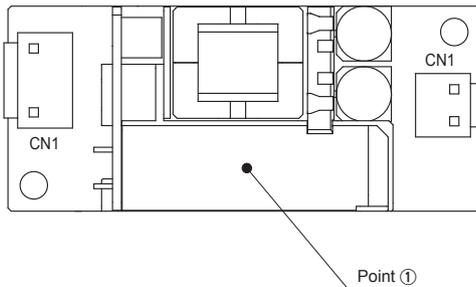


Fig.4.1 Temperature measurement point of TECS10F/20F(Top View)

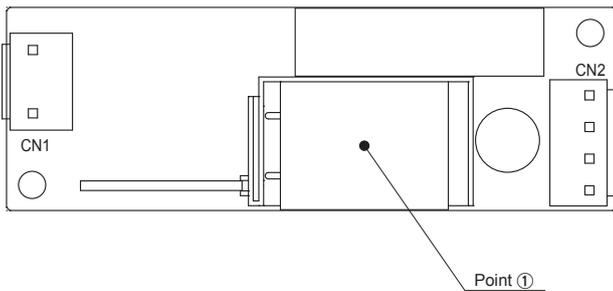


Fig.4.2 Temperature measurement point of TECS45F(Top View)

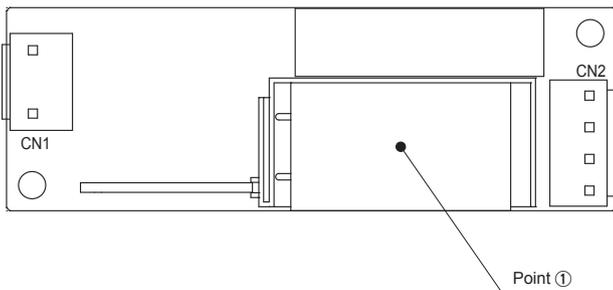


Fig.4.3 Temperature measurement point of TECS65F(Top View)

Table4.1 Maximum temperature of measurement point (TECS10F)

| Cooling method | Voltage | Mounting method | Load factor | Maximum temperature [°C] |
|----------------|----------------|---------------------------|---------------------------|--------------------------|
| | | | | ①:Capacitor |
| Convection | 5V | A,B,C,D | 75%<I _o ≤ 100% | 77 |
| | | | 50%<I _o ≤ 75% | 80 |
| | | | I _o ≤ 50% | 85 |
| | | E,F | 75%<I _o ≤ 100% | 74 |
| | | | 50%<I _o ≤ 75% | 77 |
| | | | I _o ≤ 50% | 85 |
| | 12V | A,B,C,D,E,F | 75%<I _o ≤ 100% | 80 |
| | | | 50%<I _o ≤ 75% | 85 |
| | | | I _o ≤ 50% | 88 |
| | 15V | A,B,C,D,E,F | 75%<I _o ≤ 100% | 82 |
| | | | 50%<I _o ≤ 75% | 87 |
| | | | I _o ≤ 50% | 89 |
| 24V | A,B,C,D | 75%<I _o ≤ 100% | 81 | |
| | | 50%<I _o ≤ 75% | 83 | |
| | | I _o ≤ 50% | 90 | |
| | E,F | 75%<I _o ≤ 100% | 80 | |
| | | 50%<I _o ≤ 75% | 83 | |
| | | I _o ≤ 50% | 90 | |
| Forced air | 5V,12V,15V,24V | A,B,C,D,E,F | 70%<I _o ≤ 100% | 88 |
| | | | I _o ≤ 70% | 88 |

Table4.2 Maximum temperature of measurement point (TECS20F)

| Cooling method | Voltage | Mounting method | Load factor | Maximum temperature [°C] |
|----------------|----------------|---------------------------|---------------------------|--------------------------|
| | | | | ①:Capacitor |
| Convection | 5V | A,B,C,D | 75%<I _o ≤ 100% | 83 |
| | | | 50%<I _o ≤ 75% | 86 |
| | | | I _o ≤ 50% | 89 |
| | | E,F | 75%<I _o ≤ 100% | 80 |
| | | | 50%<I _o ≤ 75% | 83 |
| | | | I _o ≤ 50% | 87 |
| | 12V | A,B,C,D,E,F | 75%<I _o ≤ 100% | 84 |
| | | | 50%<I _o ≤ 75% | 85 |
| | | | I _o ≤ 50% | 91 |
| | 15V | A,B,C,D,E,F | 75%<I _o ≤ 100% | 80 |
| | | | 50%<I _o ≤ 75% | 85 |
| | | | I _o ≤ 50% | 89 |
| 24V | A,B,C,D,E,F | 75%<I _o ≤ 100% | 81 | |
| | | 50%<I _o ≤ 75% | 88 | |
| | | I _o ≤ 50% | 91 | |
| Forced air | 5V,12V,15V,24V | A,B,C,D,E,F | 70%<I _o ≤ 100% | 88 |
| | | | I _o ≤ 70% | 88 |

Table4.3 Maximum temperature of measurement point (TECS45F)

| Cooling method | Voltage | Mounting method | Load factor | Maximum temperature [°C] |
|----------------|------------|-----------------|--------------|--------------------------|
| | | | | ①:Capacitor |
| Convection | 5V | A,C,E,F | 60%<lo≤ 100% | 83 |
| | | | 30%<lo≤ 60% | 84 |
| | | | lo≤ 30% | 85 |
| | | B,D | 60%<lo≤ 100% | 79 |
| | | | 30%<lo≤ 60% | 82 |
| | | | lo≤ 30% | 83 |
| | 12V | A,C,E,F | 60%<lo≤ 100% | 86 |
| | | | 30%<lo≤ 60% | 91 |
| | | | lo≤ 30% | 88 |
| | | B,D | 60%<lo≤ 100% | 82 |
| | | | 30%<lo≤ 60% | 88 |
| | | | lo≤ 30% | 86 |
| 24V | A,C,E,F | 60%<lo≤ 100% | 86 | |
| | | 30%<lo≤ 60% | 88 | |
| | | lo≤ 30% | 85 | |
| | B,D | 60%<lo≤ 100% | 82 | |
| | | 30%<lo≤ 60% | 86 | |
| | | lo≤ 30% | 83 | |
| Forced air | 5V,12V,24V | A,B,C,D,E,F | 70%<lo≤ 100% | 80 |
| | | | lo≤ 70% | 80 |

Table4.4 Maximum temperature of measurement point (TECS65F)

| Cooling method | Voltage | Mounting method | Load factor | Maximum temperature [°C] |
|----------------|------------|-----------------|--------------|--------------------------|
| | | | | ①:Capacitor |
| Convection | 5V | A,C,E | 60%<lo≤ 100% | 78 |
| | | | 30%<lo≤ 60% | 87 |
| | | | lo≤ 30% | 85 |
| | | B,D,F | 60%<lo≤ 100% | 74 |
| | | | 30%<lo≤ 60% | 85 |
| | | | lo≤ 30% | 84 |
| | 12V | A,C,E | 60%<lo≤ 100% | 86 |
| | | | 30%<lo≤ 60% | 91 |
| | | | lo≤ 30% | 87 |
| | | B,D,F | 60%<lo≤ 100% | 81 |
| | | | 30%<lo≤ 60% | 87 |
| | | | lo≤ 30% | 84 |
| | 24V | A,C,E | 60%<lo≤ 100% | 86 |
| | | | 30%<lo≤ 60% | 90 |
| | | | lo≤ 30% | 84 |
| | | B,D,F | 60%<lo≤ 100% | 78 |
| | | | 30%<lo≤ 60% | 85 |
| | | | lo≤ 30% | 81 |
| Forced air | 5V,12V,24V | A,B,C,D,E,F | 70%<lo≤ 100% | 80 |
| | | | lo≤ 70% | 80 |

5 Life Expectancy and Warranty

Life expectancy

Table5.1 Life expectancy (TECS10F)

| Cooling method | Voltage | Mounting method | Average ambient temperature (year) | Life expectancy | |
|----------------|----------------|-----------------|------------------------------------|-----------------|-----------------|
| | | | | Load factor | |
| | | | | lo≤ 75% | 75%<lo≤ 100% |
| Convection | 5V | A,B,C,D,E,F | Ta=40°C or less | 9years | 6years |
| | | | Ta=50°C | 4years | 3years |
| | 12V | A,B,C,D,E,F | Ta=50°C or less | 10years or more | 9years |
| | | | Ta=60°C | 6years | 4years |
| | 15V | A,B,C,D,E,F | Ta=50°C or less | 10years or more | 8years |
| | | | Ta=60°C | 6years | 4years |
| | 24V | A,B,C,D,E,F | Ta=50°C or less | 10years or more | 10years or more |
| | | | Ta=60°C | 7years | 6years |
| Forced air | 5V,12V,15V,24V | A,B,C,D,E,F | Ta=60°C or less | 5years | 5years |
| | | | Ta=70°C | 5years | 3years |

Table5.2 Life expectancy (TECS20F)

| Cooling method | Voltage | Mounting method | Average ambient temperature (year) | Life expectancy | |
|----------------|----------------|-----------------|------------------------------------|-----------------|-----------------|
| | | | | Load factor | |
| | | | | lo≤ 75% | 75%<lo≤ 100% |
| Convection | 5V | A,B,C,D,E,F | Ta=40°C or less | 10years or more | 4years |
| | | | Ta=50°C | 5years | 2years |
| | 12V | A,B,C,D,E,F | Ta=40°C or less | 10years or more | 10years or more |
| | | | Ta=50°C | 10years or more | 6years |
| | 15V | A,B,C,D,E,F | Ta=40°C or less | 10years or more | 10years or more |
| | | | Ta=50°C | 10years or more | 6years |
| | 24V | A,B,C,D,E,F | Ta=40°C or less | 10years or more | 10years or more |
| | | | Ta=50°C | 10years or more | 6years |
| Forced air | 5V,12V,15V,24V | A,B,C,D,E,F | Ta=60°C or less | 5years | 5years |
| | | | Ta=70°C | 5years | 3years |

Table5.3 Life expectancy (TECS45F)

| Cooling method | Voltage | Mounting method | Average ambient temperature (year) | Life expectancy | | |
|----------------|------------|-----------------|------------------------------------|-----------------|-----------------|--------|
| | | | | Load factor | | |
| | | | | lo≤ 75% | 75%<lo≤ 100% | |
| Convection | 5V | A,B,C,D,E,F | Ta=25°C or less | 10years or more | 10years or more | |
| | | | Ta=35°C | 10years or more | 6years | |
| | 12V | A,B,C,D,E | Ta=30°C or less | 10years or more | 7years | |
| | | | Ta=40°C | 10years or more | 3years | |
| | | F | Ta=25°C or less | 10years or more | 10years or more | |
| | | | | Ta=35°C | 10years or more | 5years |
| | 24V | A,B,C,D,E | Ta=40°C or less | 10years or more | 6years | |
| | | | Ta=50°C | 6years | 3years | |
| | | F | Ta=35°C or less | 10years or more | 8years | |
| | | | Ta=45°C | 9years | 4years | |
| Forced air | 5V,12V,24V | A,B,C,D,E,F | Ta=50°C or less | 5years | 5years | |
| | | | Ta=60°C | 5years | 3years | |

Table5.4 Life expectancy (TECS65F)

| Cooling method | Voltage | Mounting method | Average ambient temperature (year) | Life expectancy | | |
|----------------|------------|-----------------|------------------------------------|-----------------|-----------------|--------|
| | | | | Load factor | | |
| | | | | lo≤75% | 75%<lo≤100% | |
| Convection | 5V | A,B,C,D,E | Ta=30°C or less | 10years or more | 7years | |
| | | | Ta=40°C | 10years or more | 3years | |
| | | F | Ta=25°C or less | 10years or more | 7years | |
| | | | Ta=35°C | 10years or more | 3years | |
| | | 12V | A,B,C,D,E | Ta=30°C or less | 10years or more | 6years |
| | | | | Ta=40°C | 8years | 3years |
| | F | | Ta=25°C or less | 10years or more | 8years | |
| | | | Ta=35°C | 10years or more | 4years | |
| | 24V | A,B,C,E | Ta=35°C or less | 10years or more | 6years | |
| | | | Ta=45°C | 9years | 3years | |
| | | D,F | Ta=30°C or less | 10years or more | 6years | |
| | | | Ta=40°C | 6years | 3years | |
| Forced air | 5V,12V,24V | A,B,C,D,E,F | Ta=50°C or less | 5years | 5years | |
| | | | Ta=60°C | 5years | 3years | |

■ Warranty

Table5.5 Warranty (TECS10F)

(1) Convection

| Voltage | Mounting method | Average ambient temperature (year) | Warranty term | |
|---------|-----------------|------------------------------------|---------------|-------------|
| | | | Load factor | |
| | | | lo≤75% | 75%<lo≤100% |
| 5V | A,B,C,D,E,F | Ta=40°C or less | 5years | 5years |
| | | Ta=50°C | 4years | 2years |
| 12V,24V | A,B,C,D,E,F | Ta=50°C or less | 5years | 5years |
| | | Ta=60°C | 5years | 3years |
| 15V | A,B,C,D,E,F | Ta=50°C or less | 5years | 5years |
| | | Ta=60°C | 4years | 3years |

(2) Forced air (0.5m³/min)

| Voltage | Mounting method | Average ambient temperature (year) | Warranty term | |
|----------------|-----------------|------------------------------------|---------------|-------------|
| | | | Load factor | |
| | | | lo≤70% | 70%<lo≤100% |
| 5V,12V,15V,24V | A,B,C,D,E,F | Ta=60°C or less | 5years | 5years |
| | | Ta=70°C | 5years | 3years |

Table5.6 Warranty (TECS20F)

(1) Convection

| Voltage | Mounting method | Average ambient temperature (year) | Warranty term | |
|-------------|-----------------|------------------------------------|---------------|-------------|
| | | | Load factor | |
| | | | lo≤75% | 75%<lo≤100% |
| 5V | A,B,C,D,E,F | Ta=40°C or less | 5years | 4years |
| | | Ta=50°C | 3years | 2years |
| 12V,15V,24V | A,B,C,D,E,F | Ta=40°C or less | 5years | 5years |
| | | Ta=50°C | 3years | 3years |

(2) Forced air (0.5m³/min)

| Voltage | Mounting method | Average ambient temperature (year) | Warranty term | |
|----------------|-----------------|------------------------------------|---------------|-------------|
| | | | Load factor | |
| | | | lo≤70% | 70%<lo≤100% |
| 5V,12V,15V,24V | A,B,C,D,E,F | Ta=60°C or less | 5years | 5years |
| | | Ta=70°C | 5years | 3years |

Table5.7 Warranty (TECS45F)

(1) Convection

| Voltage | Mounting method | Average ambient temperature (year) | Warranty term | |
|---------|-----------------|------------------------------------|---------------|-------------|
| | | | Load factor | |
| | | | lo≤75% | 75%<lo≤100% |
| 5V | A,B,C,D,E,F | Ta=25°C or less | 5years | 5years |
| | | Ta=35°C | 5years | 3years |
| 12V | A,B,C,D,E | Ta=30°C or less | 5years | 5years |
| | | Ta=40°C | 5years | 2years |
| | F | Ta=25°C or less | 5years | 5years |
| | | Ta=35°C | 5years | 3years |
| 24V | A,B,C,D,E | Ta=40°C or less | 5years | 5years |
| | | Ta=50°C | 5years | 2years |
| | F | Ta=35°C or less | 5years | 5years |
| | | Ta=45°C | 5years | 3years |

(2) Forced air (0.5m³/min)

| Voltage | Mounting method | Average ambient temperature (year) | Warranty term | |
|------------|-----------------|------------------------------------|---------------|-------------|
| | | | Load factor | |
| | | | lo≤70% | 70%<lo≤100% |
| 5V,12V,24V | A,B,C,D,E,F | Ta=50°C or less | 5years | 5years |
| | | Ta=60°C | 5years | 3years |

Table5.8 Warranty (TECS65F)

(1) Convection

| Voltage | Mounting method | Average ambient temperature (year) | Warranty term | |
|---------|-----------------|------------------------------------|---------------|-------------|
| | | | Load factor | |
| | | | lo≤75% | 75%<lo≤100% |
| 5V | A,B,C,D,E,F | Ta=30°C or less | 5years | 5years |
| | | Ta=40°C | 5years | 3years |
| | F | Ta=25°C or less | 5years | 5years |
| | | Ta=35°C | 5years | 3years |
| 12V | A,B,C,D,E | Ta=30°C or less | 5years | 5years |
| | | Ta=40°C | 5years | 2years |
| | F | Ta=25°C or less | 5years | 5years |
| | | Ta=35°C | 5years | 3years |
| 24V | A,B,C,E | Ta=35°C or less | 5years | 4years |
| | | Ta=45°C | 5years | 2years |
| | D,F | Ta=30°C or less | 5years | 4years |
| | | Ta=40°C | 5years | 2years |

(2) Forced air (0.5m³/min)

| Voltage | Mounting method | Average ambient temperature (year) | Warranty term | |
|------------|-----------------|------------------------------------|---------------|-------------|
| | | | Load factor | |
| | | | lo≤70% | 70%<lo≤100% |
| 5V,12V,24V | A,B,C,D,E,F | Ta=50°C or less | 5years | 5years |
| | | Ta=60°C | 5years | 3years |

6 Option and Others

6.1 Outline of options

● -E2

- Option -E2 models are low leakage current type.
- The capacitor between primary and secondary has been changed from the standard type.
- Differences from standard versions are summarized in Table 6.1 and 6.2.

Table 6.1 Low leakage current type (TECS10F/20F-E2)

| | |
|-----------------|-------------|
| Leakage Current | 0.075mA Max |
| Conducted Noise | N/A |

Table 6.2 Low leakage current type (TECS45F/65F-E2)

| | |
|-----------------|------------|
| Leakage Current | 0.15mA Max |
| Conducted Noise | N/A |

● -Y (TECS10F/20F)

- Option -Y units can adjust the output voltage by attached potentiometer.
- Refer to the adjustable range to the table 6.3.

Table 6.3 Output voltage adjustment range

| Output voltage | Output voltage adjustment range[V] |
|----------------|------------------------------------|
| 5V | 4.75 to 5.5 |
| 12V | 10.8 to 13.2 |
| 15V | 13.5 to 16.5 |
| 24V | 21.6 to 26.4 |

- To increase output voltage, turn a built-in potentiometer clockwise. To decrease the output voltage, turn it counterclockwise.
- Please take care when you adjust output voltage by potentiometer, because there is possibility of electric shock and breakdown when contacting to other internal circuit by electrically conductive tool.

● -H (TECS10F/20F/45F/65F-12,24)

- Option -H models can output the peak current. Peak load is possible to draw as below.

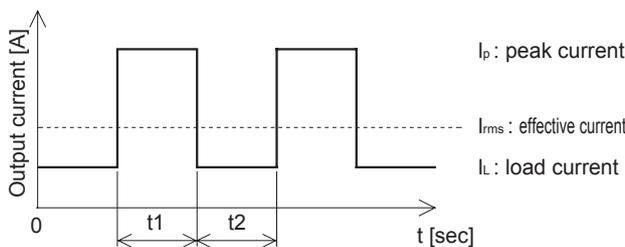


Fig.6.1 Peak current

TECS10F/20F/45F-H

- $I_{rms}^2 = \frac{I_p^2 t_1 + I_L^2 t_2}{t_1 + t_2}$
- $t_1 \leq 10[\text{sec}]$
- $I_p \leq \text{Rated peak current}[\text{A}]$ Refer to Fig 6.2
- $I_{rms} \leq \text{Rated current}[\text{A}]$
- $\text{Duty} = \frac{t_1}{t_1 + t_2} \times 100[\%] \leq 45[\%]$

TECS65F-H

- $I_{rms}^2 = \frac{I_p^2 t_1 + I_L^2 t_2}{t_1 + t_2}$
- $t_1 \leq 5[\text{sec}]$
- $I_p \leq \text{Rated peak current}[\text{A}]$ Refer to Fig 6.2
- $I_{rms} \leq \text{Rated current}[\text{A}]$
- $\text{Duty} = \frac{t_1}{t_1 + t_2} \times 100[\%]$ Refer to Fig 6.3 derating




Fig.6.2 Peak current derating curve depending on input voltage

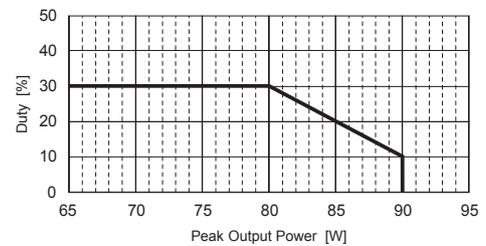


Fig.6.3 Duty of peak output power (TECS65F-H)

● -N

- -N indicates a type with cover (Refer to external view).
- Please refer to “Derating”.
- Please refer to Fig 6.4 and 6.5 for the position of Point ①. “Maximum temperature of measurement points”, “Life expectancy” and “Warranty” is different from standard models. Please refer to Table 6.4 to Table 6.15.
- The life expectancy in the upper bound temperature is two years or more.

■ Temperature Measurement Point

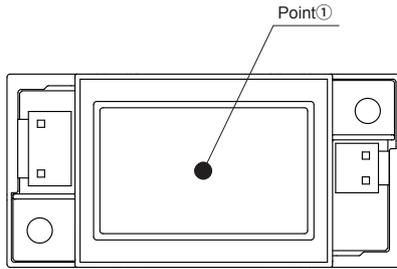


Fig.6.4 Temperature measurement point (TECS10F/20F-N)

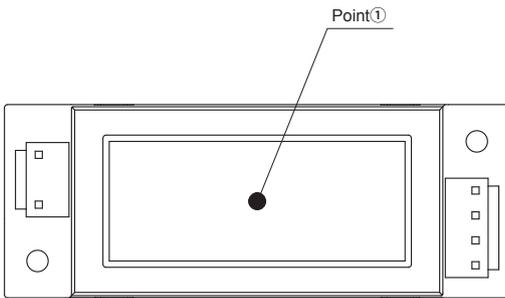


Fig.6.5 Temperature measurement point (TECS45F/65F-N)

Table6.4 Maximum temperature of measurement point (TECS10F-N)

| Cooling method | Voltage | Mounting method | Load factor | Maximum temperature [°C] |
|----------------------|------------|-----------------|---------------------------|---------------------------|
| | | | | Point① |
| Convection | 5V | A,B,C,D,E | 75%<I _o ≤ 100% | 74 |
| | | | 50%<I _o ≤ 75% | 80 |
| | | | 25%<I _o ≤ 50% | 85 |
| | | | I _o ≤ 25% | 90 |
| | 12V | A,B,C,D,E | 75%<I _o ≤ 100% | 84 |
| | | | 50%<I _o ≤ 75% | 88 |
| | | | I _o ≤ 50% | 91 |
| | 15V | A,B,C,D,E | 50%<I _o ≤ 100% | 89 |
| | | | I _o ≤ 50% | 91 |
| | 24V | A,B,C,D,E | 50%<I _o ≤ 100% | 89 |
| | | | I _o ≤ 50% | 93 |
| | Forced air | 5V,12V,15V,24V | A,B,C,D,E,F | 60%<I _o ≤ 100% |
| I _o ≤ 60% | | | | 89 |

Table6.5 Maximum temperature of measurement point (TECS20F-N)

| Cooling method | Voltage | Mounting method | Load factor | Maximum temperature [°C] |
|----------------|----------------|-----------------|---------------------------|--------------------------|
| | | | | Point① |
| Convection | 5V | A,B,C,D,E | 50%<I _o ≤ 100% | 87 |
| | | | 25%<I _o ≤ 50% | 90 |
| | | | I _o ≤ 25% | 92 |
| | 12V | A,B,C,D,E | 50%<I _o ≤ 100% | 86 |
| | | | 25%<I _o ≤ 50% | 90 |
| | | | I _o ≤ 25% | 91 |
| | 15V | A,B,C,D,E | 75%<I _o ≤ 100% | 85 |
| | | | 50%<I _o ≤ 75% | 88 |
| | | | I _o ≤ 50% | 92 |
| | 24V | A,B,C,D,E | 75%<I _o ≤ 100% | 84 |
| | | | 50%<I _o ≤ 75% | 89 |
| | | | I _o ≤ 50% | 93 |
| Forced air | 5V,12V,15V,24V | A,B,C,D,E,F | 40%<I _o ≤ 100% | 84 |
| | | | I _o ≤ 40% | 92 |

Table6.6 Maximum temperature of measurement point (TECS45F-N)

| Cooling method | Voltage | Mounting method | Load factor | Maximum temperature [°C] |
|----------------|------------|---------------------------|---------------------------|--------------------------|
| | | | | Point① |
| Convection | 5V | A,C,E | 60%<I _o ≤ 100% | 78 |
| | | | 30%<I _o ≤ 60% | 82 |
| | | | I _o ≤ 30% | 84 |
| | | B,D | 60%<I _o ≤ 100% | 74 |
| | | | 30%<I _o ≤ 60% | 82 |
| | | | I _o ≤ 30% | 83 |
| | 12V | A,C,E | 60%<I _o ≤ 100% | 82 |
| | | | 30%<I _o ≤ 60% | 86 |
| | | | I _o ≤ 30% | 88 |
| | | B,D | 60%<I _o ≤ 100% | 80 |
| | | | 30%<I _o ≤ 60% | 83 |
| | | | I _o ≤ 30% | 86 |
| 24V | A,C,E | 60%<I _o ≤ 100% | 84 | |
| | | 30%<I _o ≤ 60% | 86 | |
| | | I _o ≤ 30% | 83 | |
| | B,D | 60%<I _o ≤ 100% | 80 | |
| | | 30%<I _o ≤ 60% | 86 | |
| | | I _o ≤ 30% | 83 | |
| Forced air | 5V,12V,24V | A,B,C,D,E,F | 70%<I _o ≤ 100% | 70 |
| | | | I _o ≤ 70% | 76 |

Table6.7 Maximum temperature of measurement point (TECS65F-N)

| Cooling method | Voltage | Mounting method | Load factor | Maximum temperature [°C] |
|----------------|------------|-----------------|-------------|--------------------------|
| | | | | Point① |
| Convection | 5V | A,C,E | 60%<lo≤100% | 80 |
| | | | 30%<lo≤60% | 84 |
| | | | lo≤30% | 85 |
| | | B,D | 60%<lo≤100% | 74 |
| | | | 30%<lo≤60% | 83 |
| | | | lo≤30% | 84 |
| | 12V | A,C,E | 60%<lo≤100% | 82 |
| | | | 30%<lo≤60% | 88 |
| | | | lo≤30% | 87 |
| | | B,D | 60%<lo≤100% | 79 |
| | | | 30%<lo≤60% | 85 |
| | | | lo≤30% | 86 |
| 24V | A,C,E | 60%<lo≤100% | 82 | |
| | | 30%<lo≤60% | 88 | |
| | | lo≤30% | 84 | |
| | B,D | 60%<lo≤100% | 78 | |
| | | 30%<lo≤60% | 85 | |
| | | lo≤30% | 84 | |
| Forced air | 5V,12V,24V | A,B,C,D,E,F | 70%<lo≤100% | 72 |
| | | | lo≤70% | 76 |

Life Expectancy

Table6.8 Life expectancy (TECS10F-N)

| Cooling method | Voltage | Mounting method | Average ambient temperature (year) | Life expectancy | |
|----------------|---------|-----------------|------------------------------------|-----------------|-----------------|
| | | | | Load factor | |
| | | | | lo≤75% | 75%<lo≤100% |
| Convection | 5V | A,B,C,D,E | Ta=35°C or less | 10years or more | 6years |
| | | | Ta=45°C | 6years | 3years |
| | 12V | A,B,C,D,E | Ta=50°C or less | 10years or more | 9years |
| | | | Ta=60°C | 6years | 4years |
| | 15V | A,B,C,D,E | Ta=50°C or less | 10years or more | 7years |
| | | | Ta=60°C | 5years | 3years |
| | 24V | A,B,C,D,E | Ta=50°C or less | 10years or more | 10years or more |
| | | | Ta=60°C | 6years | 5years |

| Cooling method | Voltage | Mounting method | Average ambient temperature (year) | Life expectancy | |
|----------------|----------------|-----------------|------------------------------------|-----------------|-------------|
| | | | | Load factor | |
| | | | | lo≤70% | 70%<lo≤100% |
| Forced air | 5V,12V,15V,24V | A,B,C,D,E,F | Ta=55°C or less | 5years | 5years |
| | | | Ta=65°C | 5years | 3years |

Table6.9 Life expectancy (TECS20F-N)

| Cooling method | Voltage | Mounting method | Average ambient temperature (year) | Life expectancy | |
|----------------|---------|-----------------|------------------------------------|-----------------|-----------------|
| | | | | Load factor | |
| | | | | lo≤75% | 75%<lo≤100% |
| Convection | 5V | A,B,C,D,E | Ta=35°C or less | 10years or more | 5years |
| | | | Ta=45°C | 7years | 2years |
| | 12V | A,B,C,D,E | Ta=35°C or less | 10years or more | 10years or more |
| | | | Ta=45°C | 10years or more | 7years |
| | 15V | A,B,C,D,E | Ta=35°C or less | 10years or more | 10years or more |
| | | | Ta=45°C | 10years or more | 7years |
| | 24V | A,B,C,D,E | Ta=35°C or less | 10years or more | 10years or more |
| | | | Ta=45°C | 10years or more | 7years |

| Cooling method | Voltage | Mounting method | Average ambient temperature (year) | Life expectancy | |
|----------------|----------------|-----------------|------------------------------------|-----------------|-------------|
| | | | | Load factor | |
| | | | | lo≤70% | 70%<lo≤100% |
| Forced air | 5V,12V,15V,24V | A,B,C,D,E,F | Ta=50°C or less | 5years | 5years |
| | | | Ta=60°C | 5years | 3years |

Table6.10 Life Expectancy (TECS45F-N)

| Cooling method | Voltage | Mounting method | Average ambient temperature (year) | Life expectancy | |
|----------------|------------|-----------------|------------------------------------|-----------------|-----------------|
| | | | | Load factor | |
| | | | | lo≤75% | 75%<lo≤100% |
| Convection | 5V | A,B,C,D,E | Ta=20°C or less | 10years or more | 10years or more |
| | | | Ta=30°C | 10years or more | 5years |
| | 12V | A,B,C,D,E | Ta=20°C or less | 10years or more | 6years |
| | | | Ta=30°C | 10years or more | 3years |
| | 24V | A,B,C,D,E | Ta=30°C or less | 10years or more | 7years |
| | | | Ta=40°C | 10years or more | 3years |
| Forced air | 5V,12V,24V | A,B,C,D,E,F | Ta=40°C or less | 5years | 5years |
| | | | Ta=50°C | 5years | 3years |

Table6.11 Life Expectancy (TECS65F-N)

| Cooling method | Voltage | Mounting method | Average ambient temperature (year) | Life expectancy | |
|----------------|------------|-----------------|------------------------------------|-----------------|-----------------|
| | | | | Load factor | |
| | | | | lo≤75% | 75%<lo≤100% |
| Convection | 5V | A,B,C,D,E | Ta=20°C or less | 10years or more | 4years |
| | | | Ta=30°C | 10years or more | 2years |
| | 12V | A,B,C,D,E | Ta=20°C or less | 10years or more | 6years |
| | | | Ta=30°C | 10years or more | 3years |
| | 24V | A,B,C,D,E | Ta=25°C or less | 10years or more | 10years or more |
| | | | Ta=35°C | 9years | 5years |
| Forced air | 5V,12V,24V | A,B,C,D,E,F | Ta=40°C or less | 5years | 5years |
| | | | Ta=50°C | 5years | 3years |

■ Warranty

Table6.12 Warranty (TECS10F-N)

(1) Convection

| Voltage | Mounting method | Average ambient temperature (year) | Warranty term | |
|---------|-----------------|------------------------------------|---------------|-----------------|
| | | | Load factor | |
| | | | lo ≤ 75% | 75% < lo ≤ 100% |
| 5V | A,B,C,D,E | Ta=35°C or less | 5years | 5years |
| | | Ta=45°C | 5years | 2years |
| 12V,24V | A,B,C,D,E | Ta=50°C or less | 5years | 5years |
| | | Ta=60°C | 5years | 3years |
| 15V | A,B,C,D,E | Ta=50°C or less | 5years | 5years |
| | | Ta=60°C | 4years | 3years |

(2) Forced air (0.5m³/min)

| Voltage | Mounting method | Average ambient temperature (year) | Warranty term | |
|----------------|-----------------|------------------------------------|---------------|-----------------|
| | | | Load factor | |
| | | | lo ≤ 60% | 60% < lo ≤ 100% |
| 5V,12V,15V,24V | A,B,C,D,E,F | Ta=55°C or less | 5years | 5years |
| | | Ta=65°C | 5years | 3years |

Table6.13 Warranty (TECS20F-N)

(1) Convection

| Voltage | Mounting method | Average ambient temperature (year) | Warranty term | |
|-------------|-----------------|------------------------------------|---------------|-----------------|
| | | | Load factor | |
| | | | lo ≤ 75% | 75% < lo ≤ 100% |
| 5V | A,B,C,D,E | Ta=35°C or less | 5years | 4years |
| | | Ta=45°C | 5years | 2years |
| 12V,15V,24V | A,B,C,D,E | Ta=35°C or less | 5years | 5years |
| | | Ta=45°C | 5years | 3years |

(2) Forced air (0.5m³/min)

| Voltage | Mounting method | Average ambient temperature (year) | Warranty term | |
|----------------|-----------------|------------------------------------|---------------|-----------------|
| | | | Load factor | |
| | | | lo ≤ 40% | 40% < lo ≤ 100% |
| 5V,12V,15V,24V | A,B,C,D,E,F | Ta=50°C or less | 5years | 5years |
| | | Ta=60°C | 5years | 3years |

Table6.14 Warranty term (TECS45F-N)

(1) Convection

| Voltage | Mounting method | Average ambient temperature (year) | Warranty term | |
|---------|-----------------|------------------------------------|---------------|-----------------|
| | | | Load factor | |
| | | | lo ≤ 75% | 75% < lo ≤ 100% |
| 5V,12V | A,B,C,D,E | Ta=20°C or less | 5years | 4years |
| | | Ta=30°C | 5years | 2years |
| 24V | A,B,C,D,E | Ta=30°C or less | 5years | 5years |
| | | Ta=40°C | 5years | 2years |

(2) Forced air (0.5m³/min)

| Voltage | Mounting method | Average ambient temperature (year) | Warranty term | |
|------------|-----------------|------------------------------------|---------------|-----------------|
| | | | Load factor | |
| | | | lo ≤ 70% | 70% < lo ≤ 100% |
| 5V,12V,24V | A,B,C,D,E,F | Ta=40°C or less | 5years | 5years |
| | | Ta=50°C | 5years | 3years |

Table6.15 Warranty term (TECS65F-N)

(1) Convection

| Voltage | Mounting method | Average ambient temperature (year) | Warranty term | |
|---------|-----------------|------------------------------------|---------------|-----------------|
| | | | Load factor | |
| | | | lo ≤ 75% | 75% < lo ≤ 100% |
| 5V,12V | A,B,C,D,E | Ta=20°C or less | 5years | 4years |
| | | Ta=30°C | 5years | 2years |
| 24V | A,B,C,D,E | Ta=25°C or less | 5years | 5years |
| | | Ta=35°C | 5years | 2years |

(2) Forced air (0.5m³/min)

| Voltage | Mounting method | Average ambient temperature (year) | Warranty term | |
|------------|-----------------|------------------------------------|---------------|-----------------|
| | | | Load factor | |
| | | | lo ≤ 70% | 70% < lo ≤ 100% |
| 5V,12V,24V | A,B,C,D,E,F | Ta=40°C or less | 5years | 5years |
| | | Ta=50°C | 5years | 3years |

6.2 Others

- This power supply is the open frame type. Do not drop conductive objects in the power supply.
- At light load, there remains high voltage inside the power supply for a few minutes after power OFF.
Be careful of electric shock during maintenance.
- This power supply is manufactured by SMD technology. The stress to PCB like twisting or bending causes the defect of the unit, so handle the unit with care.
 - Please tighten the screws in all two mounting holes.
 - Install it so that PCB may become parallel to the clamp face.
 - Avoid dropping unit.
- SMD components are mounted on the front and back surfaces. Please be careful not to put stress on the SMD components.
- While turning on the electricity, and for a while after turning off, please don't touch the inside of power supply because some components could be hot.