

TEST DATA OF BRNS6

Regulated DC Power Supply
July 29, 2013

Approved by : Yoshimichi Hirokawa
Yoshimichi Hirokawa Design Manager

Prepared by : Yohei Urayama
Yohei Urayama Design Engineer

COSEL CO.,LTD.

CONTENTS

1.Input Current (by Input Voltage)	1
2.Input Current (by Load Current)	2
3.Input Power (by Load Current)	3
4.Efficiency (by Input Voltage)	4
5.Efficiency (by Load Current)	5
6.Line Regulation	6
7.Load Regulation	7
8.Dynamic Load Response	8
9.Ripple Voltage (by Load Current)	9
10.Ripple-Noise	10
11.Ripple Voltage (by Ambient Temperature)	11
12.Ambient Temperature Drift	12
13.Output Voltage Accuracy	13
14.Time Lapse Drift	14
15.Rise and Fall Time	15
16.Minimum Input Voltage for Regulated Output Voltage	16
17.Overcurrent Protection	17
18.Figure of Testing Circuitry	18

(Final Page 18)

COSEL

Model

BRNS6

Item

Input Current (by Input Voltage)

Object


Temperature

25°C

Testing Circuitry

Figure A

1.Graph

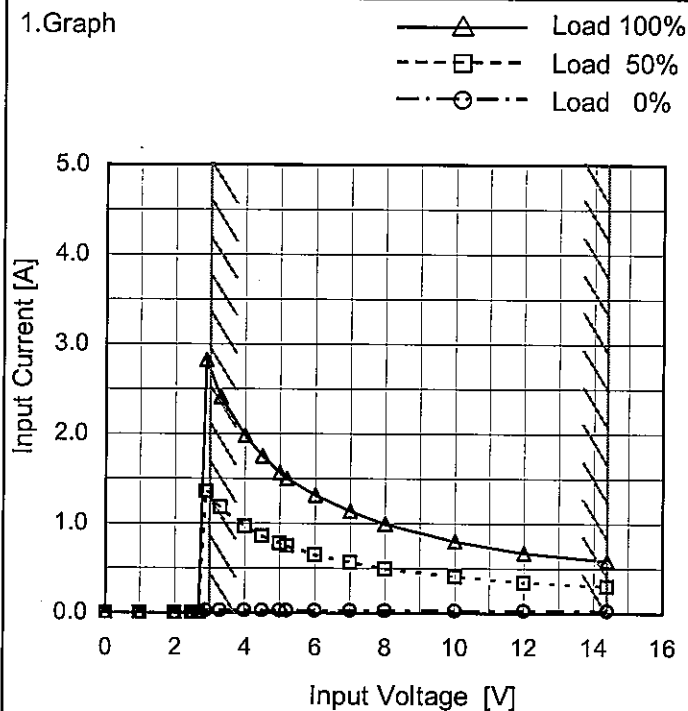

2.Values

Input Voltage [V]	Input Current [A]		
	Load 0%	Load 50%	Load 100%
0.0	0.000	0.000	0.000
1.0	0.000	0.000	0.000
2.0	0.000	0.000	0.000
2.5	0.000	0.000	0.000
2.7	0.000	0.000	0.000
2.9	0.026	1.359	2.821
3.3	0.026	1.178	2.405
4.0	0.026	0.968	1.980
4.5	0.027	0.858	1.750
5.0	0.028	0.776	1.565
5.2	0.028	0.750	1.498
6.0	0.027	0.652	1.317
7.0	0.027	0.562	1.133
8.0	0.027	0.496	0.995
10.0	0.027	0.404	0.803
12.0	0.027	0.343	0.671
14.4	0.026	0.303	0.588
--	-	-	-

COSEL

Model		BRNS6		Temperature 25°C Testing Circuitry Figure A																																																				
Item		Input Current (by Load Current)																																																						
Object																																																								
1.Graph				2.Values																																																				
<div><div><div>—△—</div><div>Input Volt.</div><div>3.3V</div></div><div><div>---□---</div><div>Input Volt.</div><div>5V</div></div><div><div>-○-</div><div>Input Volt.</div><div>12V</div></div></div> <p>Input Current [A]</p> <p>Load Current [A]</p> <p>Note: Slanted line shows the range of the rated load current.</p>				<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Input Current [A]</th></tr><tr><th>Input Volt. 3.3[V]</th><th>Input Volt. 5[V]</th><th>Input Volt. 12[V]</th></tr><tr><td>0.0</td><td>0.026</td><td>0.028</td><td>0.027</td></tr><tr><td>1.2</td><td>0.463</td><td>0.315</td><td>0.150</td></tr><tr><td>2.4</td><td>0.930</td><td>0.616</td><td>0.276</td></tr><tr><td>3.6</td><td>1.412</td><td>0.926</td><td>0.406</td></tr><tr><td>4.8</td><td>1.900</td><td>1.242</td><td>0.537</td></tr><tr><td>6.0</td><td>2.405</td><td>1.565</td><td>0.671</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr></table>		Load Current [A]	Input Current [A]			Input Volt. 3.3[V]	Input Volt. 5[V]	Input Volt. 12[V]	0.0	0.026	0.028	0.027	1.2	0.463	0.315	0.150	2.4	0.930	0.616	0.276	3.6	1.412	0.926	0.406	4.8	1.900	1.242	0.537	6.0	2.405	1.565	0.671	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Input Current [A]																																																							
	Input Volt. 3.3[V]	Input Volt. 5[V]	Input Volt. 12[V]																																																					
0.0	0.026	0.028	0.027																																																					
1.2	0.463	0.315	0.150																																																					
2.4	0.930	0.616	0.276																																																					
3.6	1.412	0.926	0.406																																																					
4.8	1.900	1.242	0.537																																																					
6.0	2.405	1.565	0.671																																																					
--	-	-	-																																																					
--	-	-	-																																																					
--	-	-	-																																																					
--	-	-	-																																																					
--	-	-	-																																																					

COSEL

Model

BRNS6

Item

Input Power (by Load Current)

Object

Temperature


25°C

Testing Circuitry

Figure A

1.Graph

—△— Input Volt. 3.3V
 ---□--- Input Volt. 5V
 - - ○ - - Input Volt. 12V

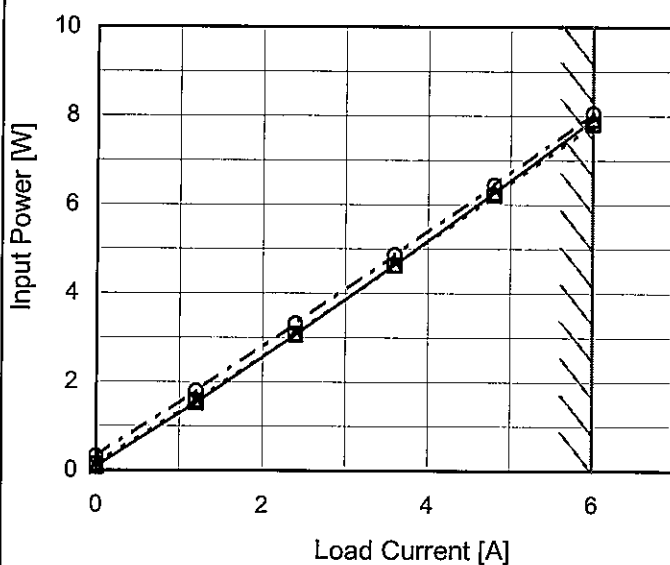

Note: Slanted line shows the range of the rated load current.

2.Values


Load Current [A]	Input Power [W]		
	Input Volt. 3.3[V]	Input Volt. 5[V]	Input Volt. 12[V]
0.0	0.08	0.14	0.32
1.2	1.53	1.57	1.80
2.4	3.06	3.08	3.31
3.6	4.65	4.63	4.87
4.8	6.26	6.21	6.44
6.0	7.92	7.81	8.05
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-

COSEL

Model	BRNS6
Item	Efficiency (by Input Voltage)
Object	

Temperature 25°C
Testing Circuitry Figure A

1. Graph

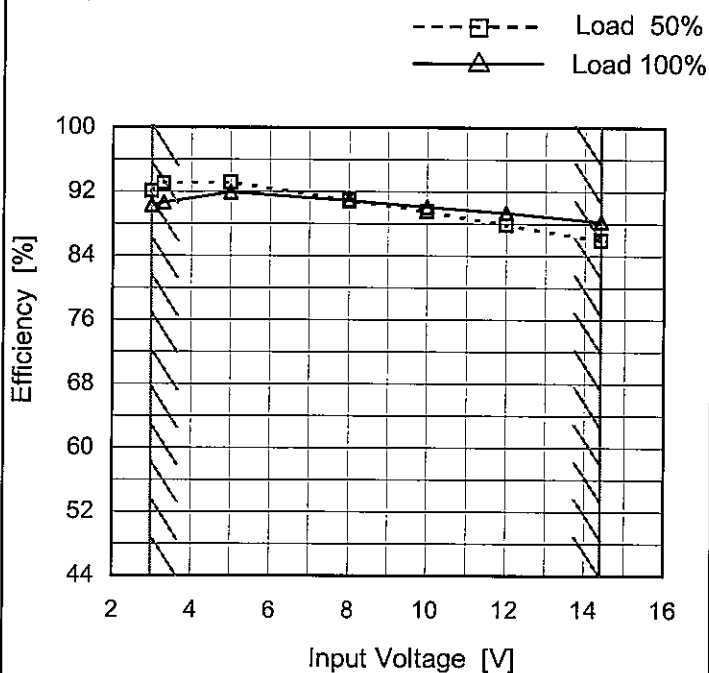

Note: Slanted line shows the range of the rated input voltage.

2. Values

Input Voltage [V]	Efficiency [%]	
	Load 50%	Load 100%
3.0	92.0	90.3
3.3	93.0	90.7
5.0	93.1	91.9
8.0	90.9	90.9
10.0	89.5	90.1
12.0	87.8	89.3
14.4	85.9	88.3
--	-	-
--	-	-

COSEL

Model		BRNS6																																																				
Item		Efficiency (by Load Current)																																																				
Object																																																						
1.Graph		2.Values																																																				
<div><div><div>—△—</div><div>---□---</div><div>- -○- -</div></div><div><div>Input Volt.</div><div>Input Volt.</div><div>Input Volt.</div></div><div><div>3.3V</div><div>5V</div><div>12V</div></div></div> <p>Efficiency [%]</p> <p>Load Current [A]</p>		<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Efficiency [%]</th></tr><tr><th>Input Volt. 3.3[V]</th><th>Input Volt. 5[V]</th><th>Input Volt. 12[V]</th></tr><tr><td>0.0</td><td>-</td><td>-</td><td>-</td></tr><tr><td>1.2</td><td>93.1</td><td>90.4</td><td>79.0</td></tr><tr><td>2.4</td><td>93.5</td><td>93.0</td><td>86.4</td></tr><tr><td>3.6</td><td>92.6</td><td>93.0</td><td>88.6</td></tr><tr><td>4.8</td><td>91.7</td><td>92.6</td><td>89.3</td></tr><tr><td>6.0</td><td>90.7</td><td>91.9</td><td>89.3</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr></table>		Load Current [A]	Efficiency [%]			Input Volt. 3.3[V]	Input Volt. 5[V]	Input Volt. 12[V]	0.0	-	-	-	1.2	93.1	90.4	79.0	2.4	93.5	93.0	86.4	3.6	92.6	93.0	88.6	4.8	91.7	92.6	89.3	6.0	90.7	91.9	89.3	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Efficiency [%]																																																					
	Input Volt. 3.3[V]	Input Volt. 5[V]	Input Volt. 12[V]																																																			
0.0	-	-	-																																																			
1.2	93.1	90.4	79.0																																																			
2.4	93.5	93.0	86.4																																																			
3.6	92.6	93.0	88.6																																																			
4.8	91.7	92.6	89.3																																																			
6.0	90.7	91.9	89.3																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
Note: Slanted line shows the range of the rated load current.																																																						

COSEL

Model

BRNS6

Item

Line Regulation

Object

+1.2V6A


Temperature

25°C

Testing Circuitry

Figure A

1. Graph

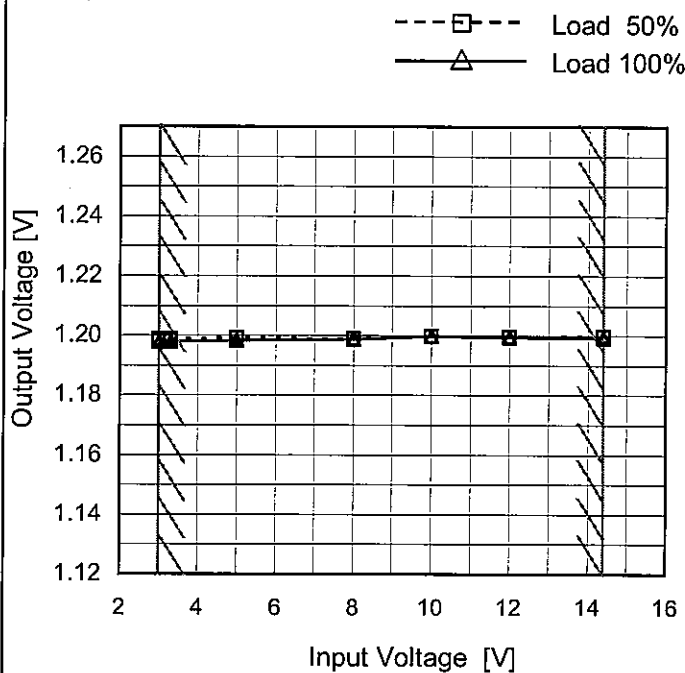

2. Values

Input Voltage [V]	Output Voltage [V]	
	Load 50%	Load 100%
3.0	1.199	1.198
3.3	1.199	1.198
5.0	1.199	1.198
8.0	1.199	1.199
10.0	1.200	1.200
12.0	1.200	1.200
14.4	1.200	1.200
--	-	-
--	-	-

COSEL

Model

BRNS6

Item

Load Regulation

Object

+1.2V6A

1.Graph

—△—

Input Volt.

3.3V

---□---

Input Volt.

5V

---○---

Input Volt.

12V

Output Voltage [V]

1.26

1.24

1.22

1.20

1.18

1.16

1.14

1.12

0

2

4

6

Load Current [A]

Note: Slanted line shows the range of the rated load current.

Temperature

25°C

Testing Circuitry

Figure A

2.Values

Load Current [A]	Output Voltage [V]		
	Input Volt. 3.3[V]	Input Volt. 5[V]	Input Volt. 12[V]
0.0	1.199	1.200	1.200
1.2	1.199	1.199	1.200
2.4	1.199	1.199	1.200
3.6	1.199	1.199	1.200
4.8	1.198	1.199	1.199
6.0	1.198	1.198	1.199
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-


- 7 -

BC-10763

COSEL

Model	BRNS6	Temperature	25°C
Item	Dynamic Load Response	Testing Circuitry	Figure B
Object	+1.2V6A		

Input Volt. 12 V
Cycle 5 ms

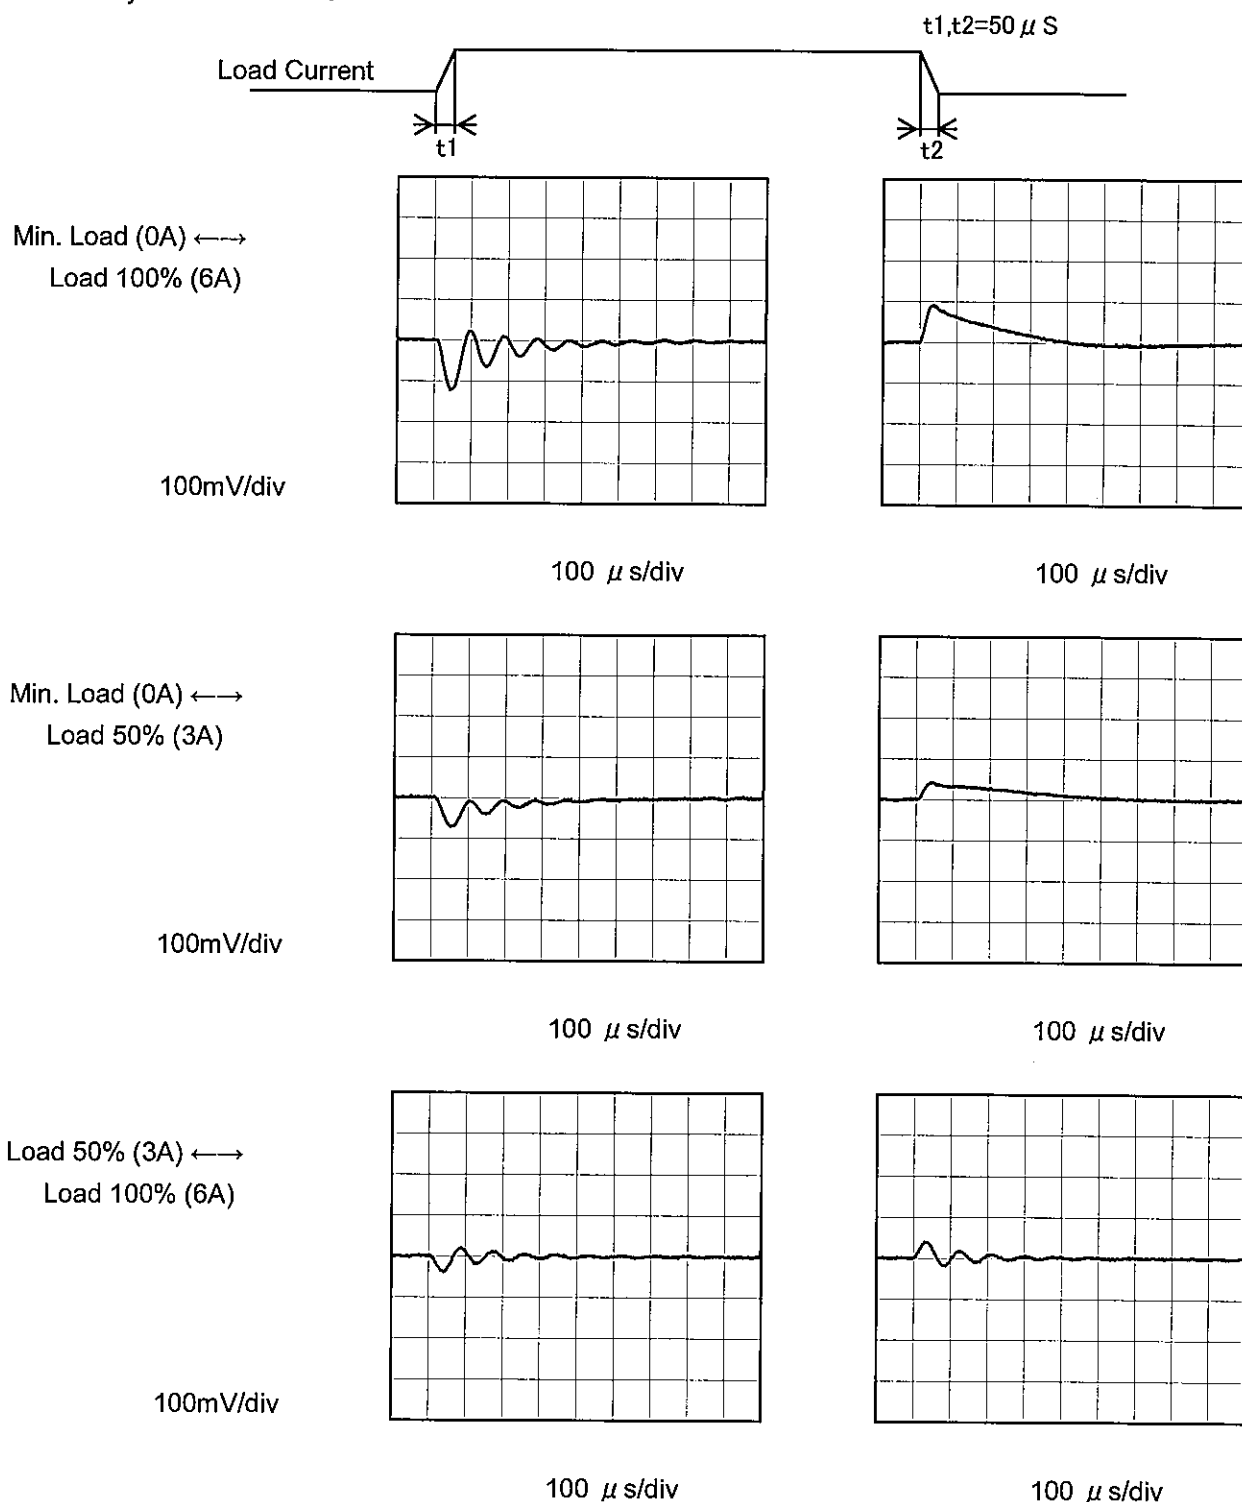

COSEL


Model BRNS6

Item Ripple Voltage (by Load Current)

Object +1.2V6A

Temperature 25°C
Testing Circuitry Figure C

1. Graph

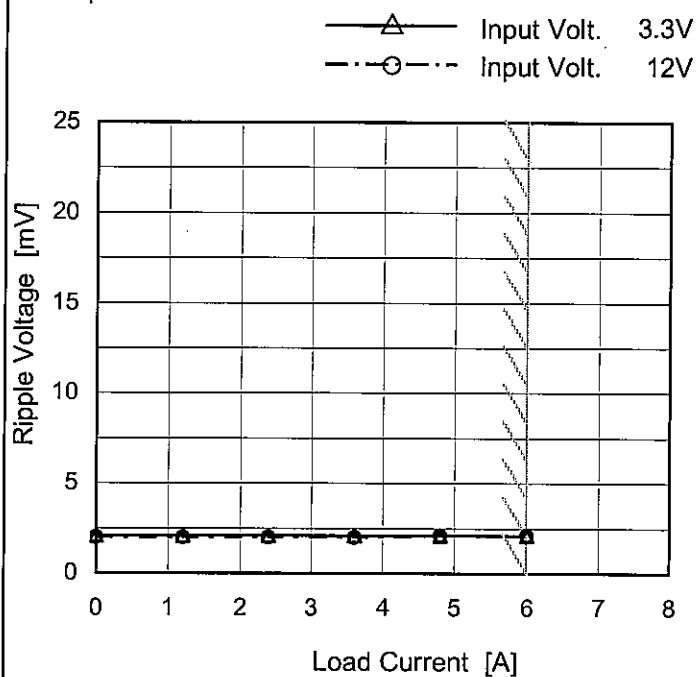

2. Values

Load Current [A]	Ripple Voltage [mV]	
	Input Volt. 3.3 [V]	Input Volt. 12 [V]
0.0	2.1	2.0
1.2	2.1	2.0
2.4	2.1	2.0
3.6	2.1	2.0
4.8	2.1	2.1
6.0	2.1	2.1
--	-	-
--	-	-
--	-	-
--	-	-
--	-	-
--	-	-

Measured by 20 MHz Oscilloscope.

Ripple Voltage is shown as p-p in the figure below.

Note: Slanted line shows the range of the rated load current.

Ripple [mVp-p]

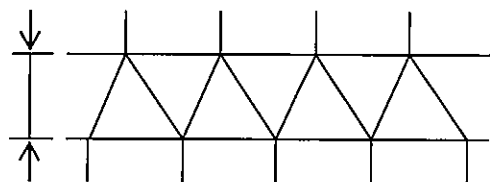


Fig. Complex Ripple Wave Form

COSEL

Model	BRNS6
Item	Ripple-Noise
Object	+1.2V6A

1.Graph

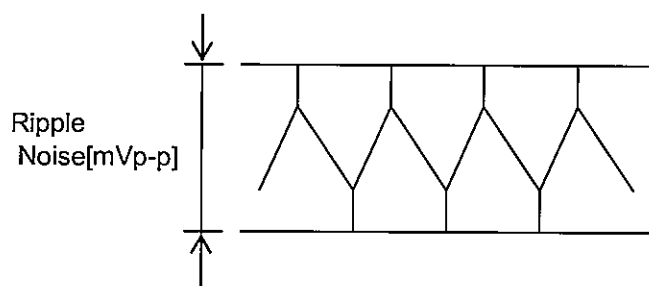
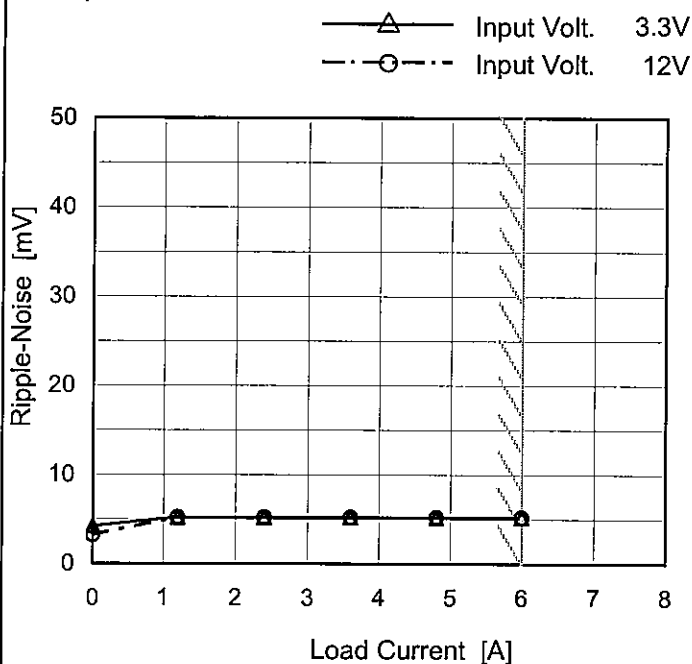


Fig.Complex Ripple Noise Wave Form

 Temperature 25°C
 Testing Circuitry Figure C

2.Values

Load Current [A]	Ripple-Noise [mV]	
	Input Volt. 3.3 [V]	Input Volt. 12 [V]
0.0	4.2	3.2
1.2	5.2	5.2
2.4	5.2	5.2
3.6	5.2	5.2
4.8	5.2	5.2
6.0	5.2	5.2
--	-	-
--	-	-
--	-	-
--	-	-
--	-	-

COSEL


Model BRNS6

Item Ripple Voltage (by Ambient Temp.)

Object +1.2V6A

Testing Circuitry Figure C

1.Graph

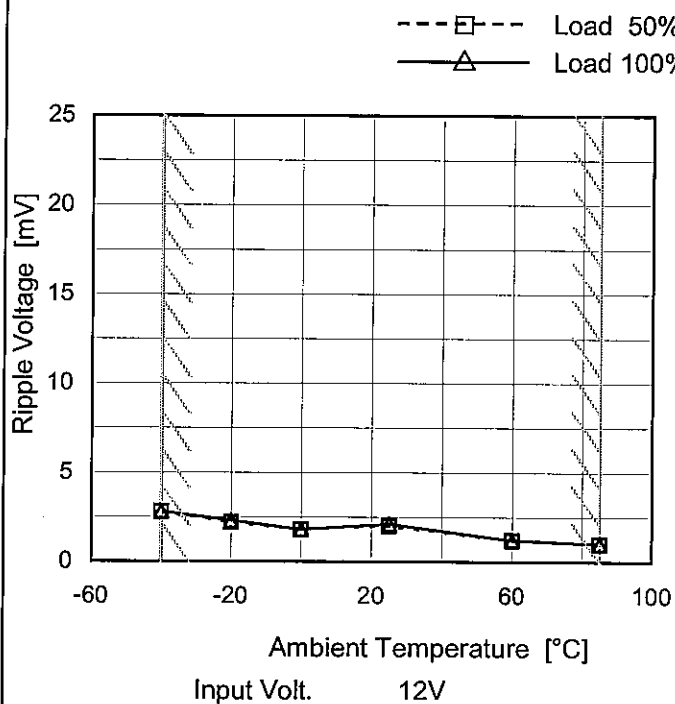

Measured by 20 MHz Oscilloscope.

Note: Slanted line shows the range of the rated ambient temperature.

2.Values

Ambient Temperature [°C]	Ripple Voltage [mV]	
	Load 50%	Load 100%
-40	2.8	2.8
-20	2.2	2.3
0	1.8	1.8
25	2.0	2.1
60	1.2	1.2
85	1.0	1.0
--	-	-
--	-	-
--	-	-
--	-	-
--	-	-

Ripple [mVp-p]

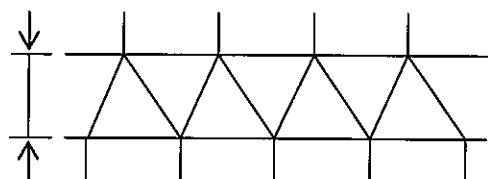


Fig.Complex Ripple Wave Form

COSEL

Model

BRNS6

Item

Ambient Temperature Drift


Object

+1.2V6A

Testing Circuitry Figure A

1. Graph

—△— Input Volt. 3.3V
 ---□--- Input Volt. 5V
 - - ○ - - Input Volt. 12V

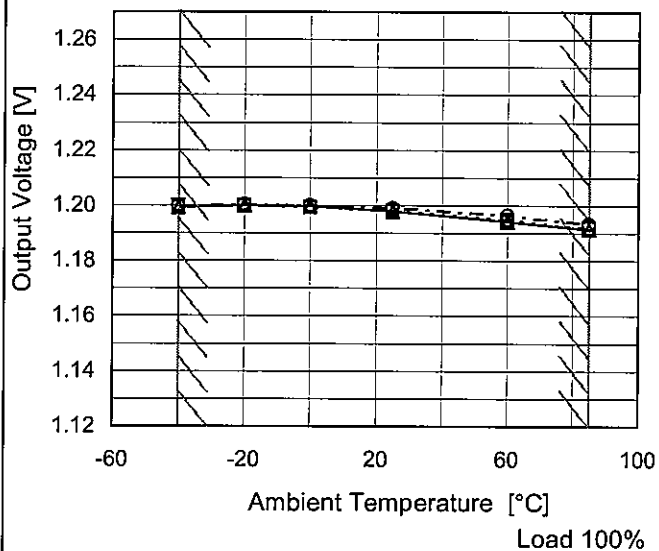

Note: Slanted line shows the range of the rated ambient temperature.

2. Values

Ambient Temperature [°C]	Output Voltage [V]		
	Input Volt. 3.3[V]	Input Volt. 5[V]	Input Volt. 12[V]
-40	1.199	1.200	1.200
-20	1.200	1.200	1.200
0	1.200	1.199	1.200
25	1.198	1.198	1.199
60	1.194	1.195	1.196
85	1.191	1.192	1.193
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-



		Testing Circuitry Figure A
Model	BRNS6	
Item	Output Voltage Accuracy	
Object	+1.2V6A	

1. Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -40 - 85°C

Input Voltage : 3.0 - 14.4V

Load Current : 0 - 6A

* Output Voltage Accuracy = $\pm(\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

* Output Voltage Accuracy (Ration) = $\frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$

2. Values


Item	Temperature [°C]	Input Voltage[V]	Output		Output Voltage Accuracy	
			Current[A]	Voltage[V]	Value [mV]	Ration [%]
Maximum Voltage	-20	5	0	1.201	±5	±0.4
Minimum Voltage	85	3.3	6	1.191		

COSEL

Model	BRNS6	Temperature 25°C Testing Circuitry Figure A
Item	Rise and Fall Time	
Object	+1.2V6A	

1.Graph


Input Volt. 12 V

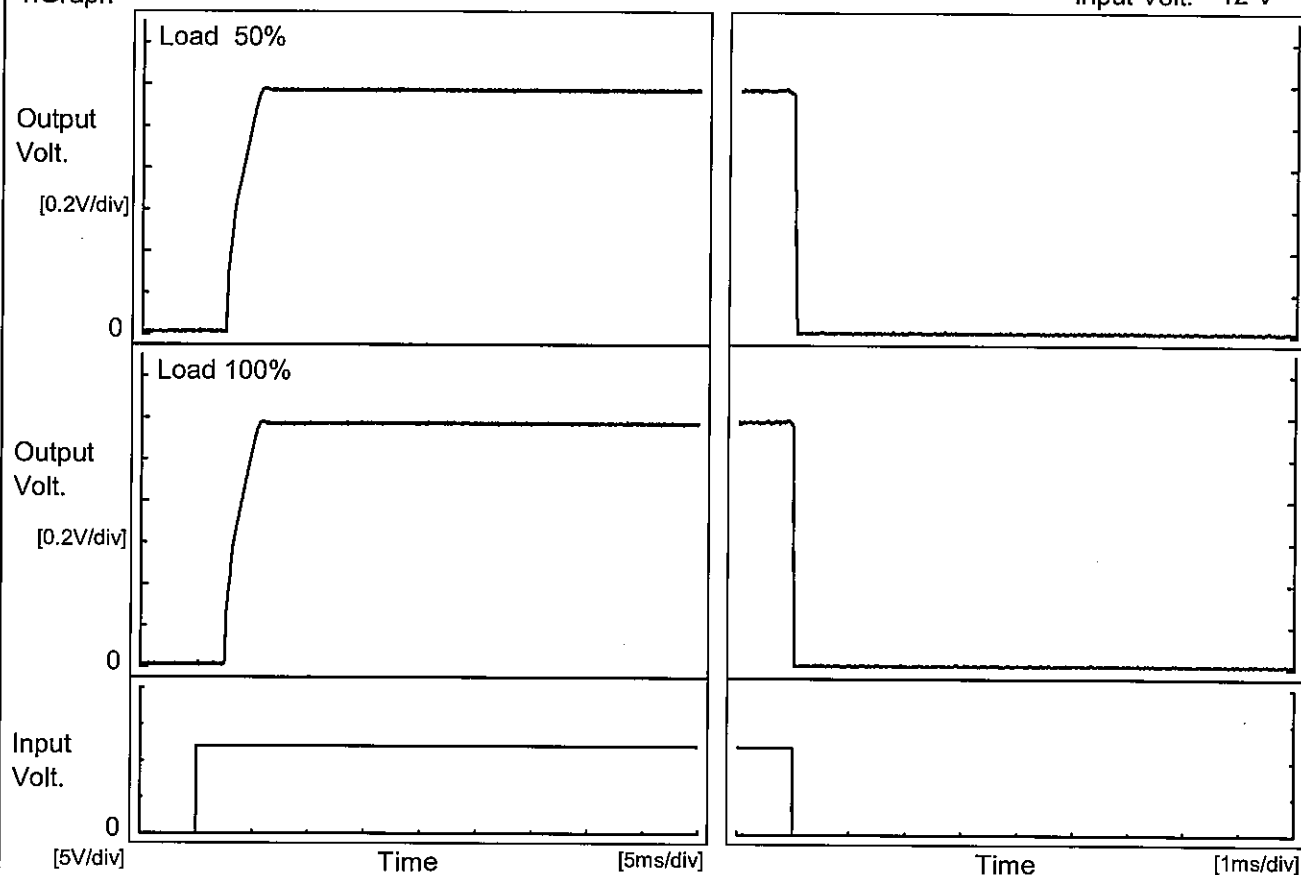

2.Values

[ms]

Load \ Time	Td	Tr	Ts	Th	Tf
50 %	2.6	2.6	5.2	0.0	0.0
100 %	2.6	2.6	5.2	0.0	0.0

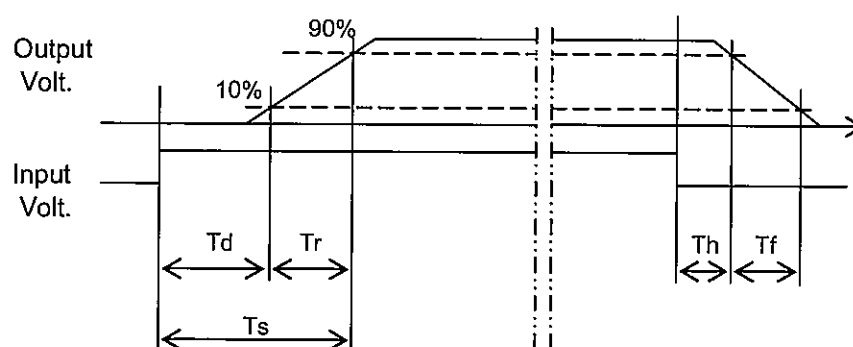

Model

BRNS6

Item


Minimum Input Voltage
for Regulated Output Voltage

Object

+1.2V6A

Testing Circuitry Figure A

1. Graph

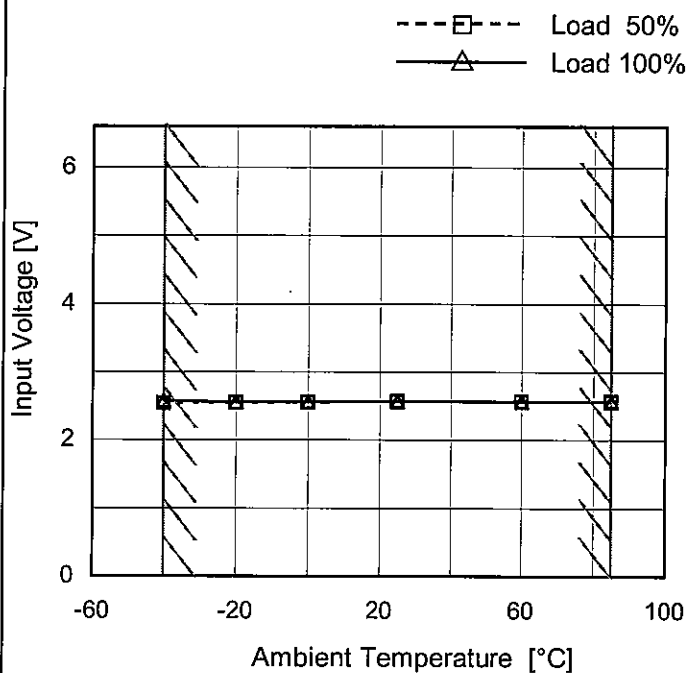

Note: Slanted line shows the range of the rated ambient temperature.

2. Values

Ambient Temperature [°C]	Input Voltage [V]	
	Load 50%	Load 100%
-40	2.54	2.58
-20	2.55	2.56
0	2.57	2.56
25	2.57	2.57
60	2.57	2.57
85	2.57	2.57
--	-	-
--	-	-
--	-	-
--	-	-
--	-	-

COSEL

Model

BRNS6

Item

Overcurrent Protection

Object

+1.2V6A

Temperature


25°C

Testing Circuitry

Figure A

1. Graph

—△ Input Volt. 3.3V
 —□ Input Volt. 5V
 —○ Input Volt. 12V

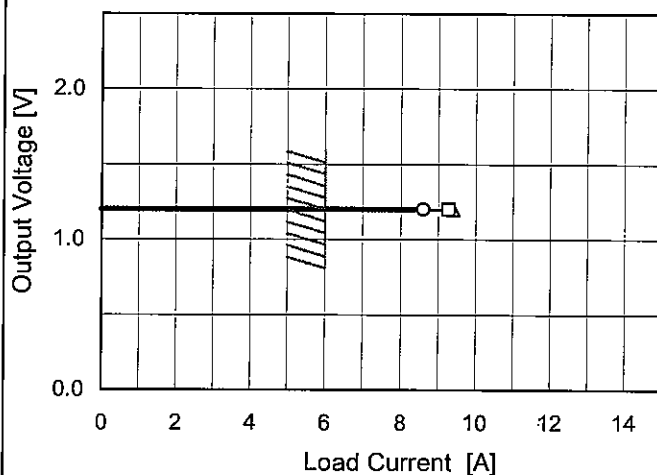

Note: Slanted line shows the range of the rated load current.

Intermittent operation occurs when overcurrent protection is activated.

2. Values

Output Voltage [V]	Load Current [A]		
	Input Volt. 3.3[V]	Input Volt. 5[V]	Input Volt. 12[V]
1.20	9.40	9.28	8.61
1.14	-	-	-
1.08	-	-	-
0.96	-	-	-
0.84	-	-	-
0.72	-	-	-
0.60	-	-	-
0.48	-	-	-
0.36	-	-	-
0.24	-	-	-
0.12	-	-	-
0.00	-	-	-

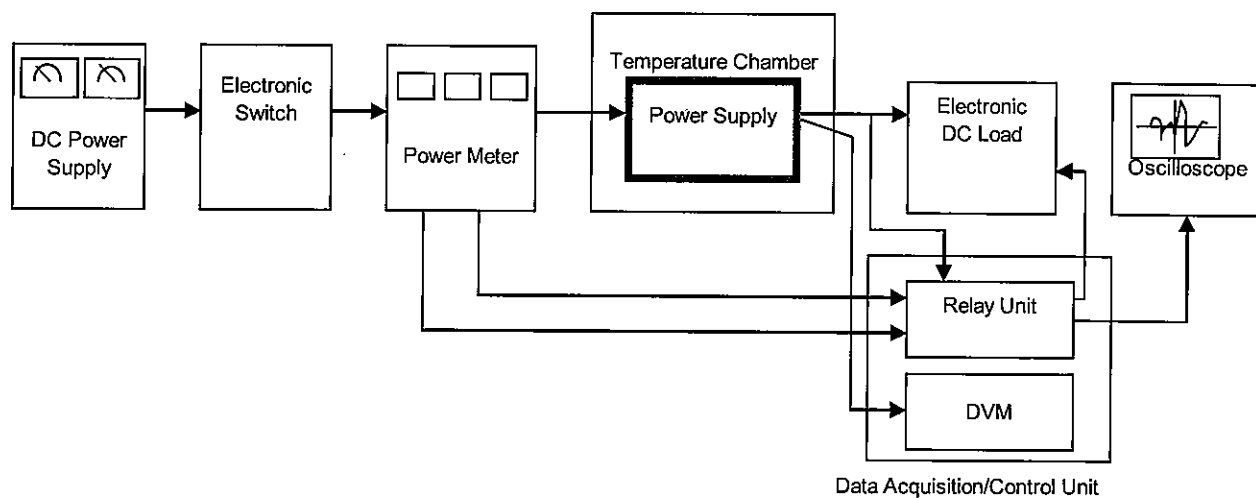


Figure A

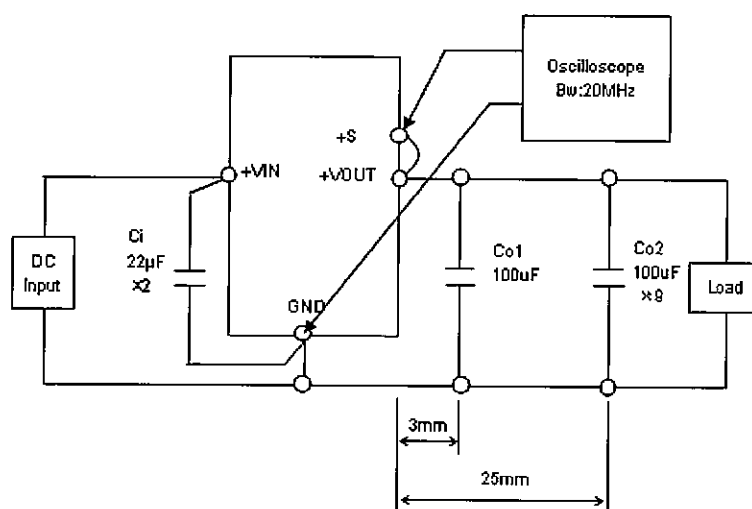


Figure B

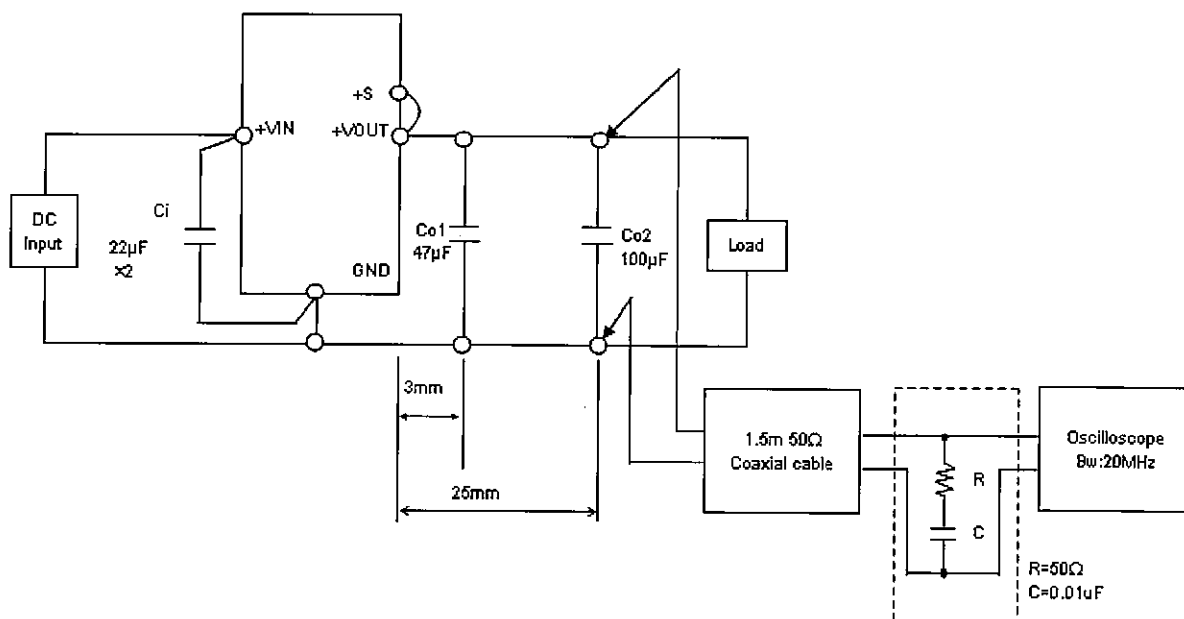


Figure C