



Test Report: CXLPA100F-12

100W AC-DC Enclosed

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test

■ RELIABILITY TEST

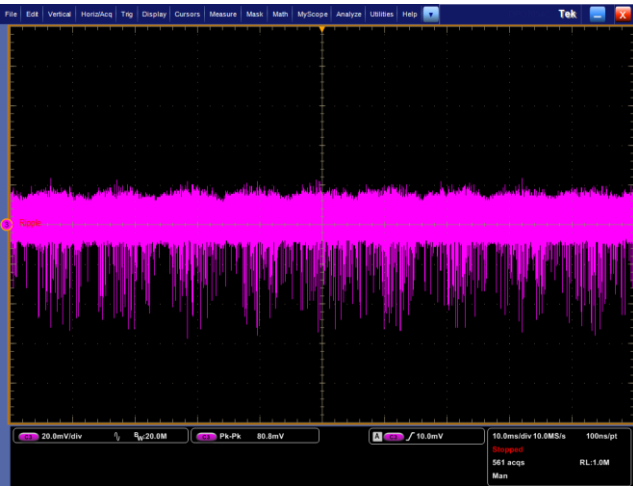
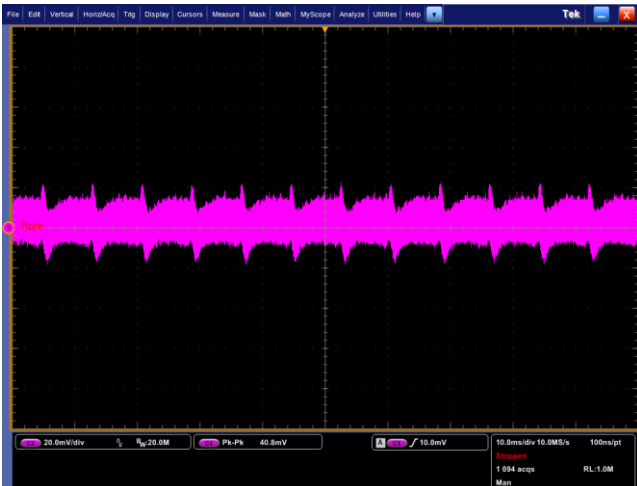
Environment Test

100W AC-DC Enclosed

CXLPA100F-12

DESIGN VERIFY TEST

OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT		
1	OUTPUT VOLTAGE TOLERANCE.	No specification	I/P: 85VAC ~ 305VAC O/P: NO ~ FULL LOAD Ta: -30°C, 25°C, 50°C	12.06 ~ 12.10V		
2	LINE REGULATION	-0.5%~+0.5%	I/P: 85VAC ~ 305VAC O/P: NO ~ FULL LOAD Ta: -30°C, 25°C, 50°C	85 to 115VAC	-0.01% ~ +0.01%	
				230 to 305VAC	-0.01% ~ +0.01%	
3	LOAD REGULATION	-1%~+1%	I/P: 85VAC I/P: 305VAC O/P: NO ~ FULL LOAD Ta: 25°C	-0.02% ~ +0.02%		
4	RIPPLE & NOISE	150mVp-p	I/P: 85VAC I/P: 305VAC O/P: FULL LOAD Ta: 25°C	85VAC	80.8mVp-p	
				305VAC	40.8mVp-p	
	85VAC/ FULL LOAD		305VAC/ FULL LOAD			
	25°C 80.8mV		25°C 40.8mV			
						

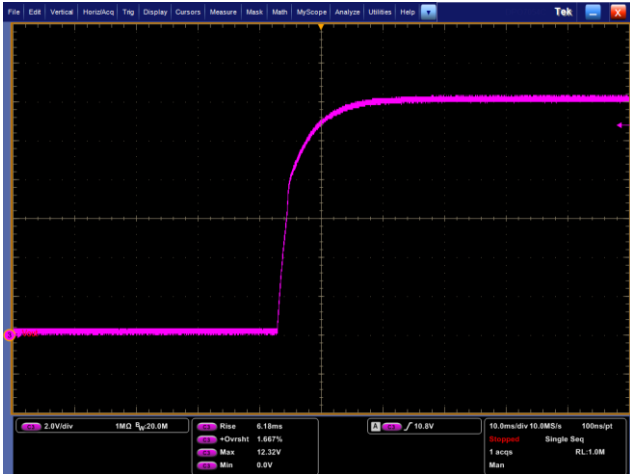
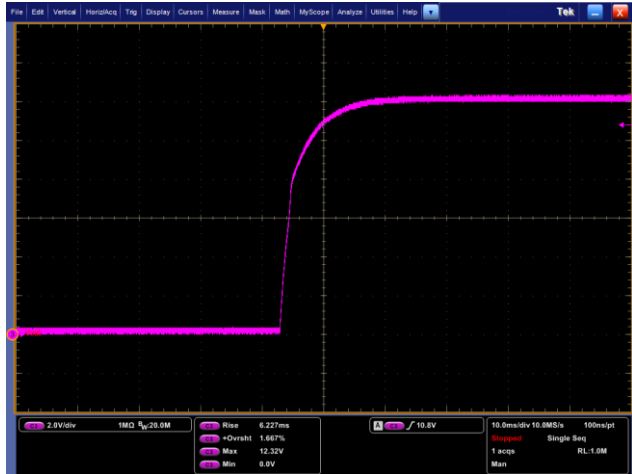
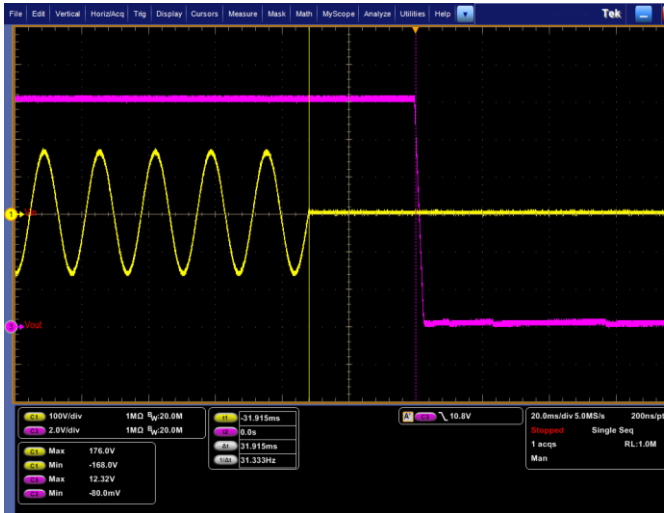
100W AC-DC Enclosed

CXLPA100F-12

5	START UP TIME		1000ms	I/P: 85VAC I/P: 305VAC O/P: FULL LOAD Ta: -30°C, 25°C, 50°C	85VAC	444.1ms
	INPUT=85VAC/47HZ @ FULL LOAD			INPUT=305V/63HZ @ FULL LOAD		
	-30°C: 370.3ms CH1: AC Input Voltage, CH3: Output Voltage			-30°C: 303.8ms CH1: AC Input Voltage, CH3: Output Voltage		
	25°C: 391.0ms CH1: AC Input Voltage, CH3: Output Voltage			25°C: 386.3ms CH1: AC Input Voltage, CH3: Output Voltage		
	50°C: 444.1ms CH1: AC Input Voltage, CH3: Output Voltage			50°C: 462.8ms CH1: AC Input Voltage, CH3: Output Voltage		

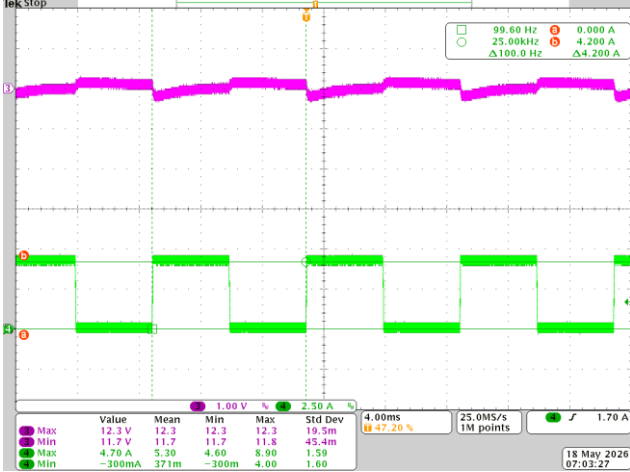
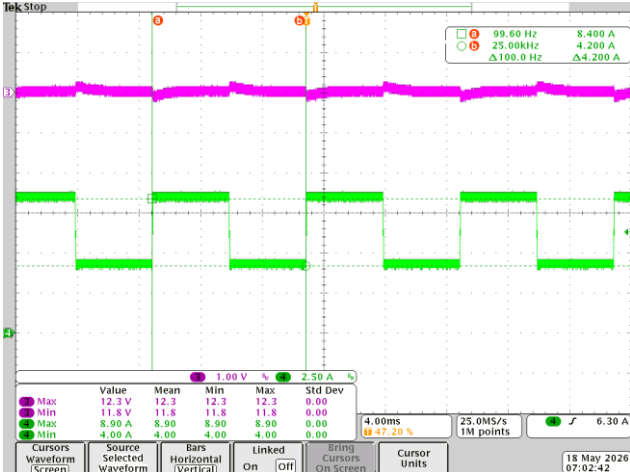
100W AC-DC Enclosed

CXLPA100F-12

6	RISE TIME	50ms	I/P: 85VAC I/P: 305VAC O/P: FULL LOAD Ta: 25°C	85VAC 305VAC	6.180ms 6.227ms
	INPUT=85VAC/47HZ @ FULL LOAD		INPUT=305V/63HZ @ FULL LOAD		
25°C: 6.180ms			25°C: 6.227ms		
					
7	HOLD UP TIME	> 20ms / 115VAC	I/P: 115VAC O/P: FULL LOAD Ta: 25°C	31.915ms	
	INPUT=115VAC/60HZ @ FULL LOAD				
25°C CH1: AC Input Voltage, CH3: Output Voltage					
					

100W AC-DC Enclosed

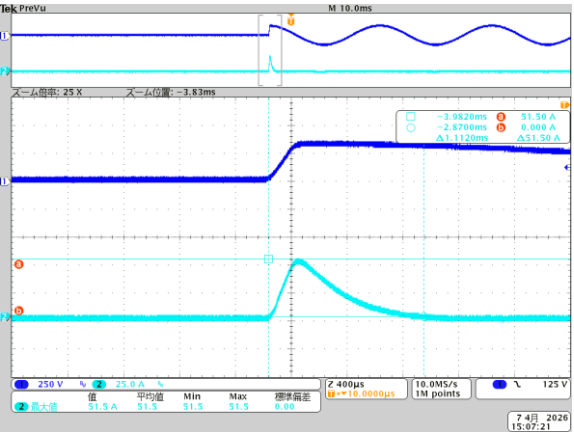
CXLPA100F-12

DYNAMIC LOAD		No specification	I/P: 85VAC O/P: (1) LOAD 0%~50% 50%DUTY / 100HZ (2) LOAD 50%~100% 50%DUTY / 100HZ (3) LOAD 0%~50% 50%DUTY / 1KHZ (4) LOAD 50%~100% 50%DUTY / 1KHZ Ta: 25°C	-
(1) INPUT=85VAC/47HZ @ LOAD 0%~50% 50%DUTY / 100HZ		(3) INPUT=85VAC/47HZ @ LOAD 0%~50% 50%DUTY / 1KHZ		
25°C CH3: Output Voltage, CH4: Output Current		25°C CH3: Output Voltage, CH4: Output Current		
				
(2) INPUT=85VAC/47HZ @ LOAD 50%~100% 50%DUTY / 100HZ		(4) INPUT=85VAC/47HZ @ LOAD 50%~100% 50%DUTY / 1KHZ		
25°C CH3: Output Voltage, CH4: Output Current		25°C CH3: Output Voltage, CH4: Output Current		
				

100W AC-DC Enclosed

CXLPA100F-12

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT CURRENT	1.1A/115VAC 0.55A/230VAC	I/P: 115VAC I/P: 230VAC O/P: FULL LOAD Ta: 25°C	0.991A @115VAC 0.483A @230VAC
2	LEAKAGE CURRENT	< 2mA / 240VAC	I/P: 240VAC O/P: FULL LOAD Ta: 25°C	L-FG: 0.156mA N-FG: 0.156mA
3	STANDBY POWER	No specification	I/P: 115VAC I/P: 230VAC O/P: NO LOAD Ta: 25°C	115VAC/0.26W 230VAC/0.26W
4	INRUSH CURRENT	60A at 230Vac (cold start)	I/P: 230VAC O/P: FULL LOAD Ta: 25°C	51.5A
	INPUT=230VAC/50HZ @ FULL LOAD CH1: AC Input Voltage, CH2: Input Current 			
5	EFFICIENCY	90.5% / FULL LOAD at 230VAC	I/P: 115VAC I/P: 230VAC O/P: FULL LOAD Ta: 25°C	115VAC/90.72% 230VAC/92.82%
6	POWER FACTOR	> 0.9	I/P: 115VAC I/P: 230VAC O/P: FULL LOAD Ta: 25°C	115VAC/0.998 230VAC/0.991

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER CURRENT PROTECTION	105%~135% rated current 8.82A<OCP<11.34A	I/P: 85VAC I/P: 305VAC O/P: TESTING Ta: 25°C	85VAC/10.29A 305VAC/10.46A
2	OVER VOLTAGE PROTECTION	120% to 150% of Rated Voltage	I/P: 85VAC I/P: 305VAC O/P: NO LOAD Ta: 25°C	85VAC/17.8V 305VAC/17.5V
3	SHORT CIRCUIT PROTECTION	NO DAMAGE (auto-recovery)	I/P: 85VAC ~ 305VAC O/P: NO LOAD, FULL LOAD Ta: 25°C	PASS
4	OVER TEMPERATURE PROTECTION	NO DAMAGE (auto-recovery)	I/P: 85VAC ~ 305VAC O/P: FULL LOAD	O.T.P. Active at 65.5°C Shut down o/p voltage recovers automatically after temperature goes down



100W AC-DC Enclosed

CXLPA100F-12

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Power Transistor	Q050 Rated 11.5A/600V	O/P: (1) Peak voltage at I/P: 305VAC (2) Peak current at I/P: 85VAC	(1) 455.62V (2) 0.583A
2	PFC Power Transistor	Q010 Rated 18A/600V	O/P: (1) Peak voltage at I/P: 305VAC (2) Peak current at I/P: 85VAC	(1) 435.62V (2) 1.566A
3	Input Capacitor	C052 Rated 82uF/450V	O/P: (1) Peak voltage at I/P: 305VAC (2) Peak current at I/P: 85VAC	(1) 438.6V (2) 0.592A

100W AC-DC Enclosed

CXLPA100F-12

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 4.0KVAC/min I/P-FG: 2.0KVAC/min O/P-FG: 0.5KVAC/min	I/P-O/P: 4.0KVAC/min I/P-FG: 2.0KVAC/min O/P-FG: 0.5KVAC/min Ta: 25°C	PASS
2	ISOLATION RESISTANCE	I/P-O/P: 500VDC: >100MΩ I/P-FG: 500VDC: >100MΩ O/P-FG: 500VDC: >100MΩ	I/P-O/P: 500VDC I/P-FG: 500VDC O/P-FG: 500VDC Ta: 25°C	PASS

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS A	I/P: 115VAC I/P: 230VAC O/P: FULL LOAD Ta: 25°C	PASS
2	RADIATION	EN55032 CLASS B	I/P: 115VAC I/P: 230VAC O/P: FULL LOAD Ta: 25°C	PASS
3	CONDUCTION	EN55032 CLASS B	I/P: 115VAC I/P: 230VAC O/P: FULL LOAD Ta: 25°C	PASS
4	E. S. D	EN61000-4-2 Air: ±8KV, Contact: ±4KV CRITERIA A	I/P: 230VAC O/P: FULL LOAD Ta: 25°C	PASS
5	E. F. T	EN61000-4-4 INPUT: ±2KV CRITERIA A	I/P: 230VAC O/P: FULL LOAD Ta: 25°C	PASS
6	SURGE	EN61000-4-5 L-N: ±1KV L, N-PE: ±2KV CRITERIA A	I/P: 230VAC O/P: FULL LOAD Ta: 25°C	PASS
7	VOLTAGE DIPS	IEC61000-4-11 (1) < 5 % residual voltage, 0.5 cycle CRITERIA A (2) 70% residual voltage, 25 cycles (at 50Hz) CRITERIA A (3) < 5 % residual voltage, 250 cycles (at 50 Hz) CRITERIA B	I/P: 230VAC O/P: FULL LOAD Ta: 25°C	PASS

100W AC-DC Enclosed

CXLPA100F-12

8	Conducted Immunity	IEC61000-4-6 0.15-10 MHz, 3V, 80% AM (1kHz), 10-30 MHz, 3V-1V, 80% AM (1kHz), 30-80 MHz, 1V, 80% AM (1kHz), CRITERIA A	I/P: 230VAC O/P: FULL LOAD Ta: 25°C	PASS
9	Radiated Immunity	IEC61000-4-3 (1) 80 to 1000(MHz), 3 V/m, 80 % AM (1 kHz) (2) 1800, 2600, 3500, 5000 MHz (± 1 %), 3V/m, 80% AM (1kHz) CRITERIA A	I/P: 230VAC O/P: FULL LOAD Ta: 25°C	PASS
10	Power Frequency Magnetic Field	IEC61000-4-8 1A/m, 50Hz CRITERIA A	I/P: 230VAC O/P: FULL LOAD Ta: 25°C	PASS

■ RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	TEMPERATURE	No components damaged	I/P: 85VAC @ 47Hz O/P: FULL LOAD Ta: 50°C	PASS*Table 1
2	CAPACITOR LIFE CYCLE	The electrolytical capacitor life is greater than 43,800 hours	I/P: 230 VAC @ 50Hz O/P: FULL LOAD Ta: 50°C	LIFETIME= 67,416 hours
3	MTBF	The power supply reliability, when calculated by SR332 exceeds 2,500,000 hours with all output at 100% of maximum load and at ambient temperature of 25°C		8,215,939 hours @ 115VAC 7,733,049 hours @ 230VAC
4	HUMIDITY	Storage: 25°C / 10 ~ 95% RH Working: 25°C/ 20 ~ 90% RH I/P: 100~277VAC (Working) O/P: 100% load (Working)		PASS
5	VIBRATION TEST	Ware form: Random Acceleration: 2Grms Axis/Time: X, Y, Z / 10min per axis Frequency: 10~500Hz No functional, mechanical and safety fail.		PASS
6	ALTITUDE	Operational and Non-operational Altitude: 5000 meters Temperature: -5°C Dwell time: 24Hrs I/P: 100~277VAC (Operational) O/P: 100% load (Operational)		PASS
7	OVERLOAD BURN-IN TEST	I/P: 115VAC/ 60Hz O/P: Just before OCP kicks in Ta: 50°C		PASS

*1 All component temperatures should not exceed maximum operation temperature.

100W AC-DC Enclosed

CXLP A100F-12

Table 1. Components temperature @ 50°C 100% Load. (Unit °C)

No.	Location	85VAC	Result
1	Q010	90.6	Pass
2	L010	94.7	Pass
3	L003	86.4	Pass
4	D050	85.3	Pass
5	L002	86.8	Pass
6	L001	82.6	Pass
7	T050W	88.9	Pass
8	T050C	88.2	Pass
9	C200	83.8	Pass
10	C052	87.0	Pass
11	Q050	91.5	Pass
12	D010	87.8	Pass
13	Q210	85.5	Pass
14	IC201	87.7	Pass

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	Wen Kuang	Caroe Tsai	Miles Chiu