

How to install C-Bridge I driver

C-Bridge I driver installation manual

1. Introduction

C-Bridge I is a USB to Extended-UART converter.
You need to install C-Bridge I driver to your PC.

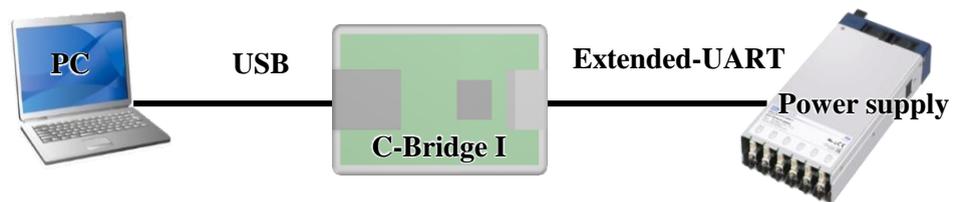


Figure 1.1 The connection between the power supply and the PC

How to install C-Bridge I driver

2. Installing the driver on Windows 10

2.1 Download the driver from our website


https://en.cosel.co.jp/form/form.php?form_id=108

Unzip the downloaded file to any location.




2.2 Connect C-Bridge to your PC

2.3 Right-click start menu and click "Device Manager"

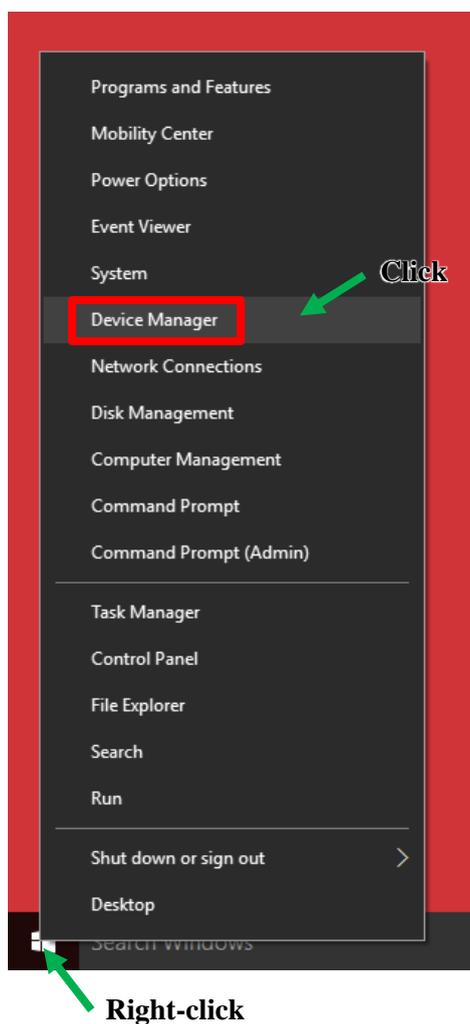


How to install C-Bridge I driver

2.4 Right-click on "USB Serial Device (COMx)" in "Ports (COM & LPT)" and click "Update Driver Software..."

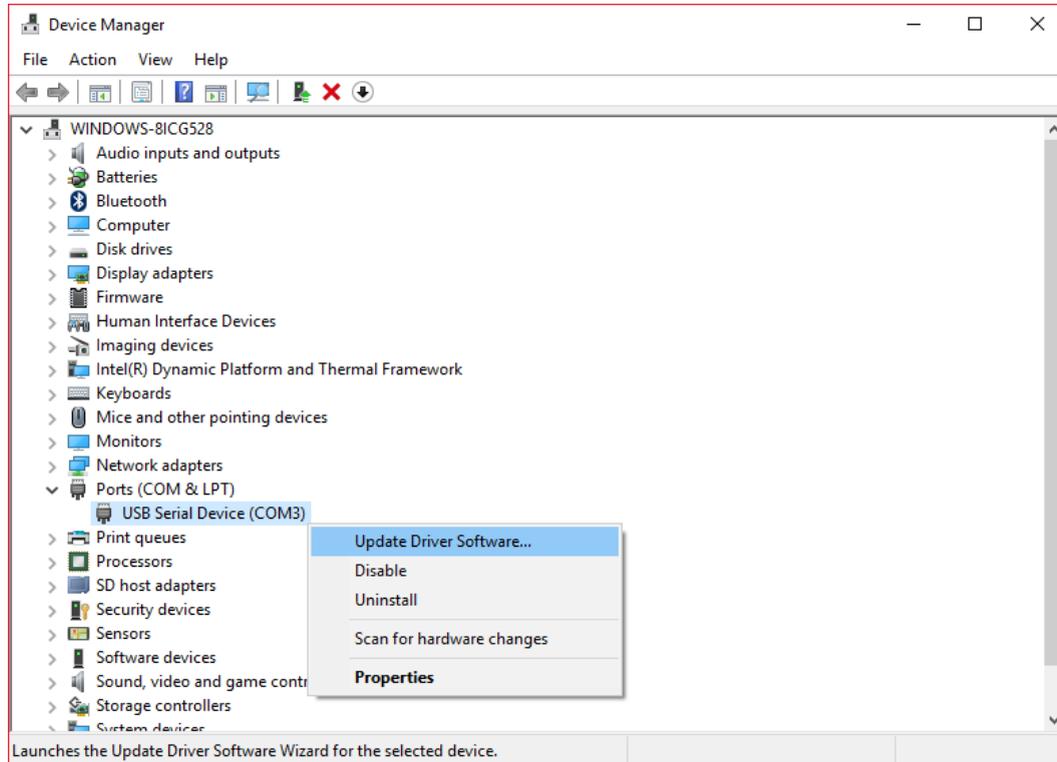


2.5 Click "Browse my computer for driver software"

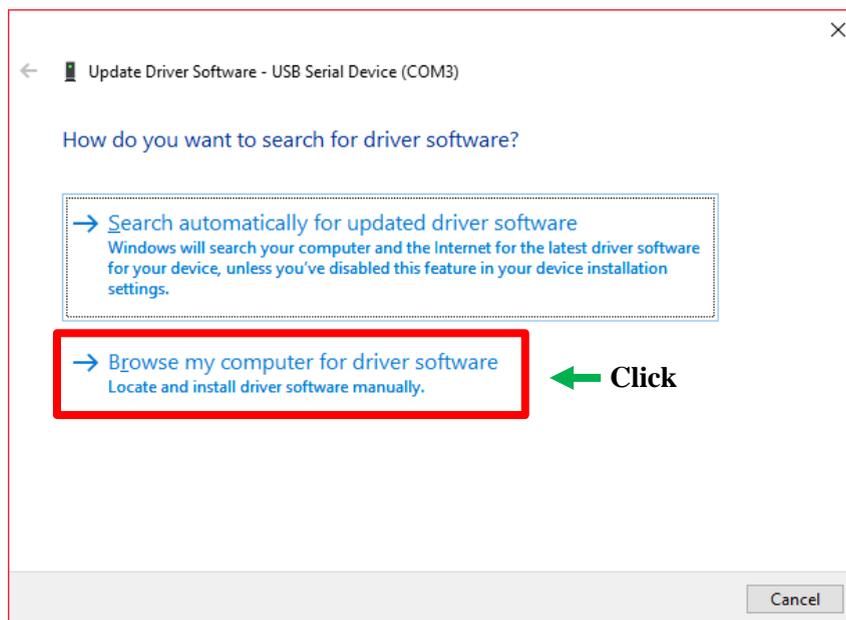


How to install C-Bridge I driver

2.6 Select the folder where you unzipped the downloaded file.

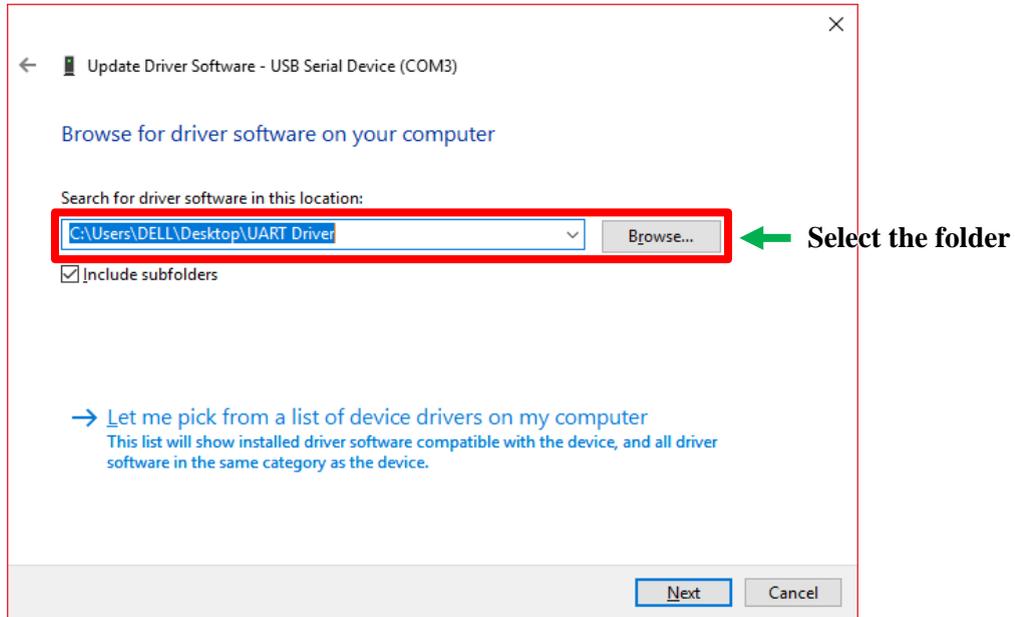

2.7 Wait for the driver to be installed.

Click the "Close" button.

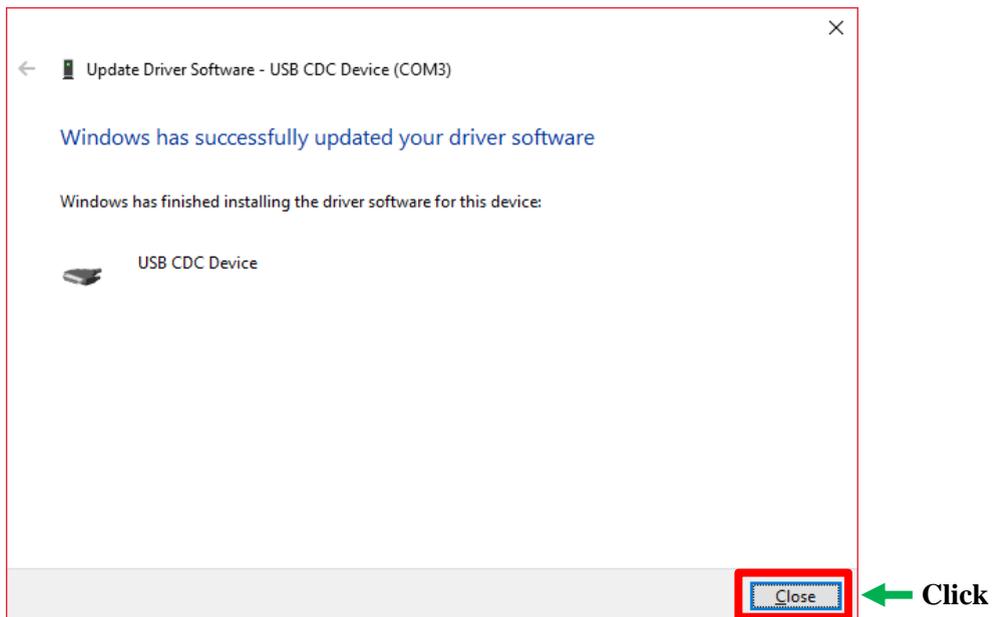

How to install C-Bridge I driver

2.8 When installation is properly completed, "USB CDC device (COMx)" is shown in "Ports (COM & LPT)".

