


PDA • PDW-series

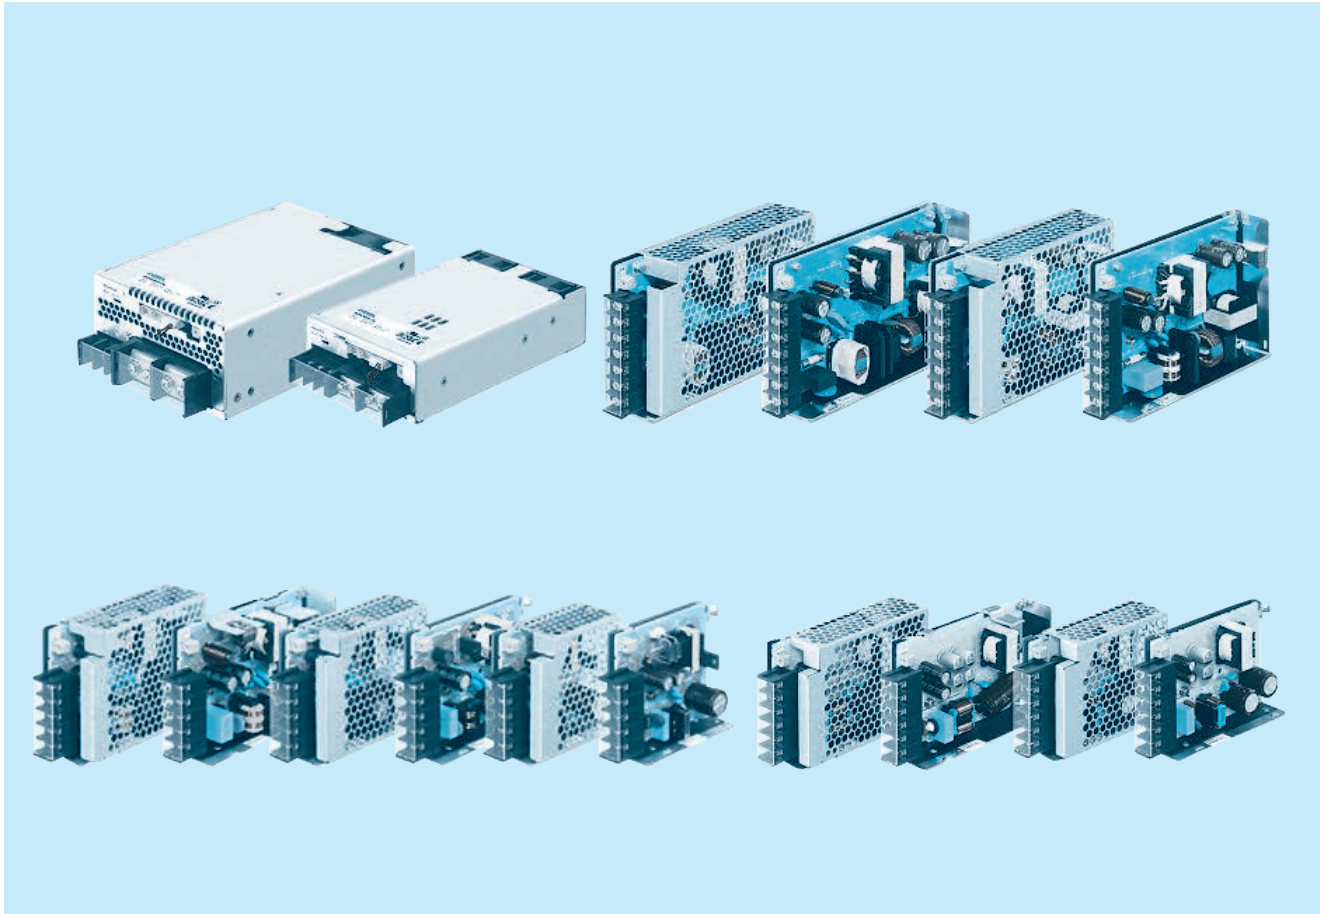

Feature

- High efficiency
- Low noise
- Complies with SEMI F47
- Harmonic attenuator (Complies with IEC61000-3-2)
- Universal input (85-264VAC)
- Built-in inrush current, overcurrent and overvoltage protection circuits
- UL508 (Optional)
 - PDA300F/600F
- Parallel Operation / N+1 Parallel Redundancy Operation possible
- With various alarms
- With AUX output 12V
- Output voltage can be varied to near 0V

Safety agency approvals

- UL62368-1, C-UL (equivalent to CAN/CSA-C22.2 No.62368-1), EN62368-1
- Complies with DEN-AN

5-year warranty (refer to Instruction Manual)

CE marking

- Low Voltage Directive
- RoHS Directive

UKCA marking

- Electrical Equipment Safety Regulations
- RoHS Regulations

EMI

- Complies with CISPR11-B, CISPR32-B, EN55011-B, EN55032-B, FCC Part 15-B, FCC Part 18-B, VCCI-B

EMS Compliance : EN61204-3, EN61000-6-2

- EN61000-4-2
- EN61000-4-3
- EN61000-4-4
- EN61000-4-5
- EN61000-4-6
- EN61000-4-8
- EN61000-4-11

PDA15F

PD

A

15

F

-

-

①


②

③

④

⑤

⑥

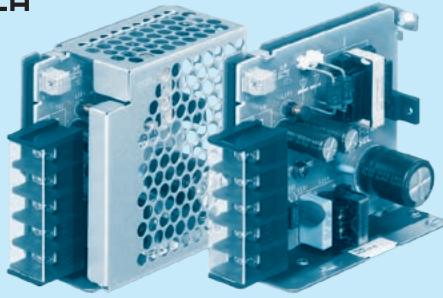

Example recommended EMI/EMC filter
NAC-06-472



High voltage pulse noise type : NAP series
Low leakage current type : NAM series
* A higher current rating EMI/EMC filter
may be recommended in view of the
other devices that could be connected
in parallel with the power supply.

- ① Series name
② Single output
③ Output wattage
④ Universal input
⑤ Output voltage
⑥ Optional *1
N : with cover
C : with Coating
G : LOW leakage current
J1 : VH(J.S.T.) connector type
N1 : with DIN rail and Cover
T5 : UL508[5V,12V,24V]

For option details, refer to
Instruction Manual 8.1.

* Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.

MODEL	PDA15F-3R3	PDA15F-5	PDA15F-12	PDA15F-15	PDA15F-24
MAX OUTPUT WATTAGE[W]	9.9	15	15.6	15	16.8
DC OUTPUT	3.3V 3A	5V 3A	12V 1.3A	15V 1A	24V 0.7A

SPECIFICATIONS

MODEL	PDA15F-3R3	PDA15F-5	PDA15F-12	PDA15F-15	PDA15F-24
VOLTAGE[VAC]	85 - 264 1 φ (Refer to "Derating" and Instruction Manual 1.1)				
INPUT	CURRENT[A]	0.24typ	0.35typ		
	ACIN 100V	0.13typ	0.19typ		
	ACIN 230V				
	FREQUENCY[Hz]	50 / 60 (45 - 440)			
	EFFICIENCY[%]	72.0typ	75.0typ	78.5typ	81.0typ
INPUT	ACIN 100V	73.0typ	78.5typ	80.5typ	83.5typ
	ACIN 230V				
	INRUSH CURRENT[A]	15typ (Io=100%) at cold start			
	ACIN 100V	35typ (Io=100%) at cold start			
	ACIN 230V				
INPUT	LEAKAGE CURRENT[ma]	0.15 / 0.30max (ACIN 100V / 240V, 60Hz, Io=100%, According to IEC62368-1, and DEN-AN)			
	VOLTAGE[V]	3.3	5	12	15
	CURRENT[A]	3.0	3.0	1.3	1.0
	LINE REGULATION[mV]	20max	20max	48max	60max
	LOAD REGULATION[mV]	40max	40max	100max	120max
OUTPUT	RIPPLE[mVp-p]	0 to +55°C	80max	80max	120max
		-20 to 0°C	140max	140max	160max
		Io=0 to 15%	300max	300max	360max
	RIPPLE NOISE[mVp-p]	0 to +55°C	120max	150max	150max
		-20 to 0°C	160max	180max	180max
		Io=0 to 15%	360max	360max	360max
OUTPUT	TEMPERATURE REGULATION[mV]	0 to +55°C	50max	120max	150max
		-20 to +55°C	60max	150max	180max
			60max	180max	290max
	DRIFT[mV]	20max	20max	48max	60max
	START-UP TIME[ms]	80typ (ACIN 100V, Io=100%)			
OUTPUT	HOLD-UP TIME[ms]	20typ (ACIN 100V, Io=100%) / 150typ (ACIN 230V, Io=100%)			
	OUTPUT VOLTAGE ADJUSTMENT RANGE[V]	2.85 to 3.60	4.50 to 5.50	10.00 to 13.20	13.20 to 18.00
	OUTPUT VOLTAGE SETTING[V]	3.30 to 3.40	5.00 to 5.15	12.00 to 12.48	15.00 to 15.60
					19.20 to 27.00
					24.00 to 24.96
PROTECTION	OVERCURRENT PROTECTION	Works over 105% of rating and recovers automatically			
	OVERVOLTAGE PROTECTION	4.00 to 5.25	5.75 to 7.00	15.00 to 18.00	20.00 to 25.00
	REMOTE SENSING	Not provided			
					30.00 to 37.00
ISOLATION	INPUT-OUTPUT	3,000VAC 1minute, Cutoff current = 10mA, 500VDC 100MΩ min (At Room Temperature)			
	INPUT-FG	2,000VAC 1minute, Cutoff current = 10mA, 500VDC 100MΩ min (At Room Temperature)			
	OUTPUT-FG	500VAC 1minute, Cutoff current = 25mA, 500VDC 100MΩ min (At Room Temperature)			
ENVIRONMENT	OPERATING TEMP., HUMID. AND ALTITUDE	-20 to +70°C, 20 - 90%RH (Non condensing), 5,000m (16,500feet) max			
	STORAGE TEMP., HUMID. AND ALTITUDE	-20 to +75°C, 20 - 90%RH (Non condensing), 9,000m (30,000feet) max			
	VIBRATION	10 - 55Hz, 19.6m/s ² (2G), 3minutes period, 60minutes each along X, Y and Z axis			
	IMPACT	196.1m/s ² (20G), 11ms, once each X, Y and Z axis			
SAFETY AND NOISE REGULATIONS	AGENCY APPROVALS	UL62368-1, C-UL (equivalent to CAN/CSA-C22.2No.62368-1), EN62368-1, Complies with DEN-AN			
	CONDUCTED NOISE	Complies with CISPR11-B, CISPR32-B, EN55011-B, EN55032-B, FCC Part15-B, FCC Part18-B, VCCI-B			
	HARMONIC ATTENUATOR	Complies with IEC61000-3-2 (Class A) (No built-in power factor correction)			
	CASE SIZE/WEIGHT	31 X 78 X 85mm [1.22 X 3.07 X 3.35 inches] (without terminal block) (W X H X D) / 180g max (with cover : 210g max)			
	COOLING METHOD	Convection/Forced air (Requires external fan) (Refer to "Derating")			

*1 The listed options may affect the published standard specifications. Please contact us for detailed product specifications.

*2 Derating is required. Please contact us for DC input.

*3 At low load conditions, the burst mode operation will start. To check load regulation, you will need to measure the characteristics at average mode with instruments.

*4 This is the value that measured on measuring board with capacitor of 22 μF at 150mm from output terminal.
Measured by 20MHz oscilloscope or Ripple-Noise meter
(Equivalent to KEISOKU-GIKEN:RM104).
Ripple and ripple noise spec is change at Io=0 to 15% by burst operation.

*5 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C, with the input voltage held constant at the rated input/output.


*6 Please contact us about another class. When two or more units are operating it may not comply with the IEC61000-3-2. Please contact us for details.

* To meet the specification, do not operate overload condition.

* Parallel operation is not possible.


* Sound noise may be generated by power supply in case of pulse load.

Block diagram

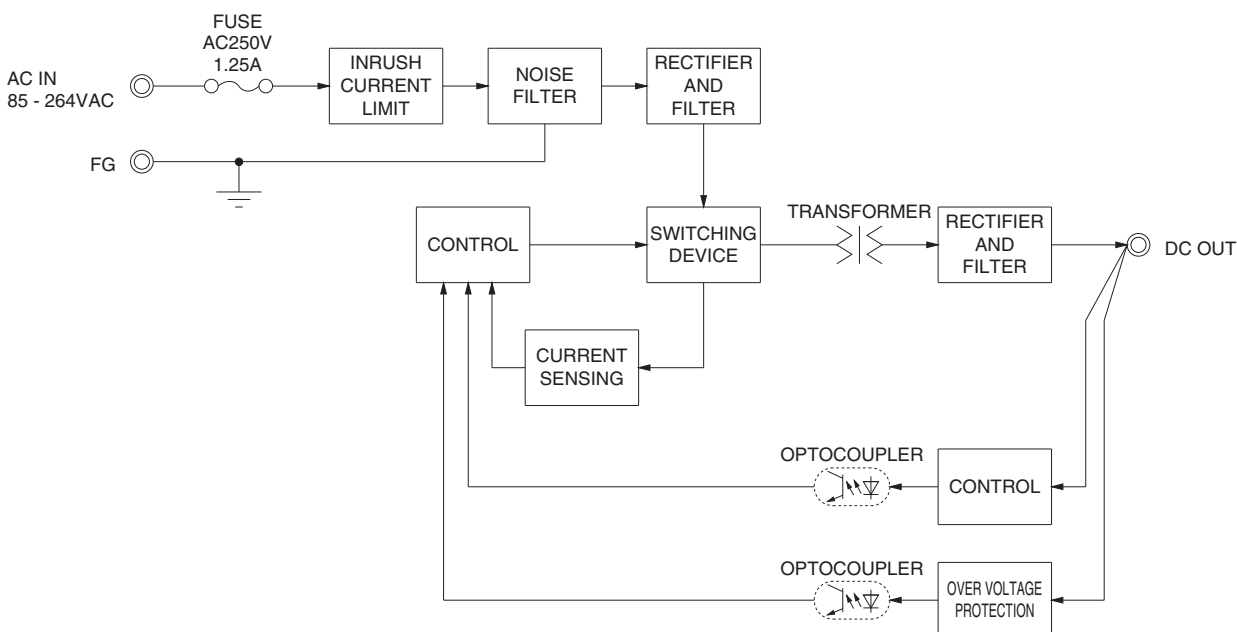


External view

*External size of option J1, N1 and V is different from standard model and refer to 8 option of instruction manual for details.

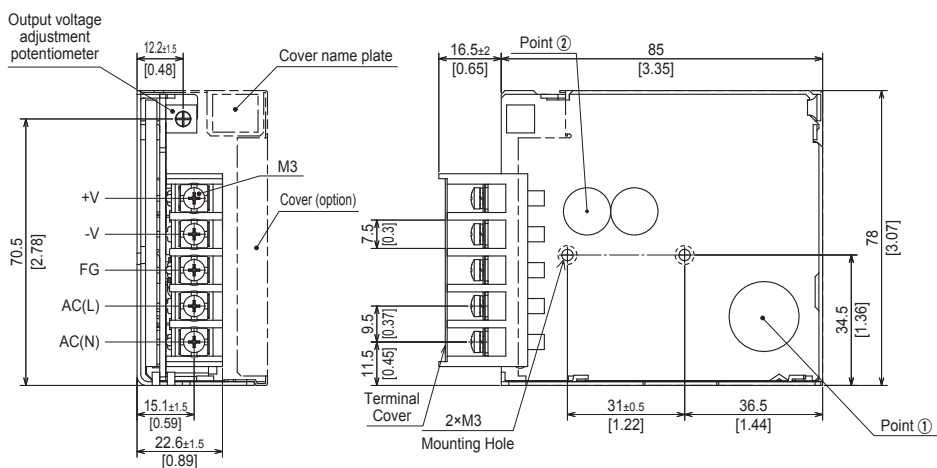

- * Tolerance : ± 1 [± 0.04]
- * Weight : 180g max (with cover : 210g max)
- * PCB Material / thickness : CEM3 / 1.6mm [0.06]
- * Chassis material : Galvanized steel plate
- * Dimensions in mm, [] = inches
- * Mounting torque : 0.6N · m max
- * Screw tightening torque : M3 0.8N · m max
- * Please connect safety ground to the unit in 2-M3 holes
- * Point ①, Point ② are thermometry points. Please refer to Instruction Manual 4.

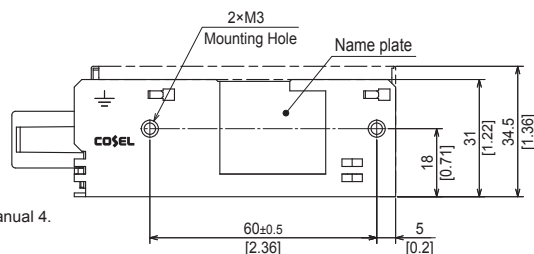

PDA30F

Ordering information

PD

A

30

F

-

-

①


②

③

④

⑤

⑥

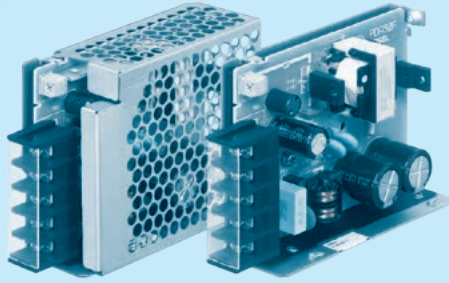

Example recommended EMI/EMC filter
NAC-06-472



High voltage pulse noise type : NAP series
Low leakage current type : NAM series
* A higher current rating EMI/EMC filter
may be recommended in view of the
other devices that could be connected
in parallel with the power supply.

- ① Series name
② Single output
③ Output wattage
④ Universal input
⑤ Output voltage
⑥ Optional *1
N : with cover
C : with Coating
G : LOW leakage current
J1 : VH(J.S.T.) connector type
N1 : with DIN rail and Cover
T5 : UL508[5V,12V,24V]

For option details, refer to
Instruction Manual 8.1.

* Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.

MODEL	PDA30F-3R3	PDA30F-5	PDA30F-12	PDA30F-15	PDA30F-24
MAX OUTPUT WATTAGE[W]	*2 19.8	30	30	30	31.2
DC OUTPUT	*2 3.3V 6A	5V 6A	12V 2.5A	15V 2A	24V 1.3A

SPECIFICATIONS

	MODEL	PDA30F-3R3	PDA30F-5	PDA30F-12	PDA30F-15	PDA30F-24	
INPUT	VOLTAGE[VAC]	*2 85 - 264 1 φ (Refer to “Derating” and Instruction Manual 1.1)					
	CURRENT[A]	ACIN 100V	0.42typ	0.62typ			
		ACIN 230V	0.22typ	0.32typ			
	FREQUENCY[Hz]	50 / 60 (45 - 440)					
	EFFICIENCY[%]	ACIN 100V	82.5typ	83.0typ	82.0typ	81.0typ	83.5typ
		ACIN 230V	84.5typ	87.0typ	85.5typ	84.5typ	86.5typ
	INRUSH CURRENT[A]	ACIN 100V	15typ (Io=100%) at cold start				
	ACIN 230V	35typ (Io=100%) at cold start					
	LEAKAGE CURRENT[ma]	0.25 / 0.55 max (ACIN 100V / 240V, 60Hz, Io=100%, According to IEC62368-1, and DEN-AN)					
OUTPUT	VOLTAGE[V]	3.3	5	12	15	24	
	CURRENT[A]	*2 6.0	6.0	2.5	2.0	1.3	
	LINE REGULATION[mV]	*3 20max	20max	48max	60max	96max	
	LOAD REGULATION[mV]	*3 40max	40max	100max	120max	150max	
	RIPPLE[mVp-p]	0 to +55℃	80max	80max	120max	120max	120max
		-20 to 0℃	140max	140max	160max	160max	160max
		Io=0 to 15%	300max	300max	300max	300max	300max
	RIPPLE NOISE[mVp-p]	0 to +55℃	120max	120max	150max	150max	150max
		-20 to 0℃	160max	160max	180max	180max	180max
		Io=0 to 15%	360max	360max	360max	360max	360max
	TEMPERATURE REGULATION[mV]	0 to +55℃	50max	50max	120max	150max	240max
		-20 to +55℃	60max	60max	150max	180max	290max
	DRIFT[mV]	*5 20max	20max	48max	60max	96max	
	START-UP TIME[ms]	80typ (ACIN 100V, Io=100%)					
	HOLD-UP TIME[ms]	20typ (ACIN 100V, Io=100%) / 150typ (ACIN 230V, Io=100%)					
OUTPUT VOLTAGE ADJUSTMENT RANGE[V]	2.85 to 3.60	4.50 to 5.50	10.00 to 13.20	13.20 to 18.00	20.40 to 27.00		
OUTPUT VOLTAGE SETTING[V]	3.30 to 3.40	5.00 to 5.15	12.00 to 12.48	15.00 to 15.60	24.00 to 24.96		
PROTECTION CIRCUIT AND OTHERS	OVERCURRENT PROTECTION	Works over 105% of rating and recovers automatically					
	OVERVOLTAGE PROTECTION	4.00 to 5.25	5.75 to 7.00	15.00 to 18.00	20.00 to 25.00	30.00 to 37.00	
	REMOTE SENSING	Not provided					
ISOLATION	INPUT-OUTPUT	3,000VAC 1minute, Cutoff current = 10mA, 500VDC 100MΩ min (At Room Temperature)					
	INPUT-FG	2,000VAC 1minute, Cutoff current = 10mA, 500VDC 100MΩ min (At Room Temperature)					
	OUTPUT-FG	500VAC 1minute, Cutoff current = 25mA, 500VDC 100MΩ min (At Room Temperature)					
ENVIRONMENT	OPERATING TEMP., HUMID. AND ALTITUDE	*2 -20 to +70℃, 20 - 90%RH (Non condensing), 5,000m (16,500feet) max					
	STORAGE TEMP., HUMID. AND ALTITUDE	-20 to +75℃, 20 - 90%RH (Non condensing), 9,000m (30,000feet) max					
	VIBRATION	10 - 55Hz, 19.6m/s ² (2G), 3minutes period, 60minutes each along X, Y and Z axis					
	IMPACT	196.1m/s ² (20G), 11ms, once each X, Y and Z axis					
SAFETY AND NOISE REGULATIONS	AGENCY APPROVALS	UL62368-1, C-UL (equivalent to CAN/CSA-C22.2No.62368-1), EN62368-1, Complies with DEN-AN					
	CONDUCTED NOISE	Complies with CISPR11-B, CISPR32-B, EN55011-B, EN55032-B, FCC Part15-B, FCC Part18-B, VCCI-B					
	HARMONIC ATTENUATOR	*6 Complies with IEC61000-3-2 (Class A) (No built-in power factor correction)					
OTHERS	CASE SIZE/WEIGHT	31 X 78 X 103mm [1.22 X 3.07 X 4.06 inches] (without terminal block) (W X H X D) / 250g max (with cover : 280g max)					
	COOLING METHOD	*2 Convection/Forced air (Requires external fan) (Refer to “Derating”)					

*1 The listed options may affect the published standard specifications. Please contact us for detailed product specifications.

*2 Derating is required. Please contact us for DC input.

*3 At low load conditions, the burst mode operation will start. To check load regulation, you will need to measure the characteristics at average mode with instruments.

*4 This is the value that measured on measuring board with capacitor of 22 μ F at 150mm from output terminal.
Measured by 20MHz oscilloscope or Ripple-Noise meter
(Equivalent to KEISOKU-GIKEN:RM104).
Ripple and ripple noise spec is change at Io=0 to 15% by burst operation.

*5 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C, with the input voltage held constant at the rated input/output.


*6 Please contact us about another class. When two or more units are operating it may not comply with the IEC61000-3-2. Please contact us for details.

* To meet the specification, do not operate overload condition.

* Parallel operation is not possible.


* Sound noise may be generated by power supply in case of pulse load.

Block diagram

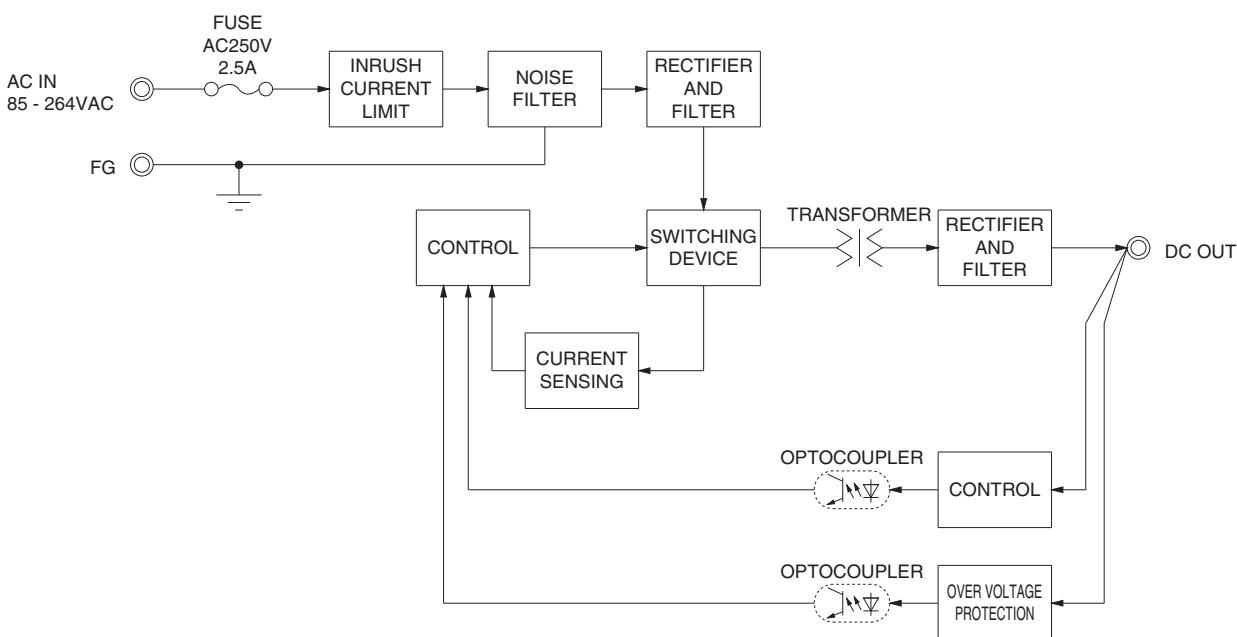


External view

*External size of option J1, N1 and V is different from standard model and refer to 8 option of instruction manual for details.

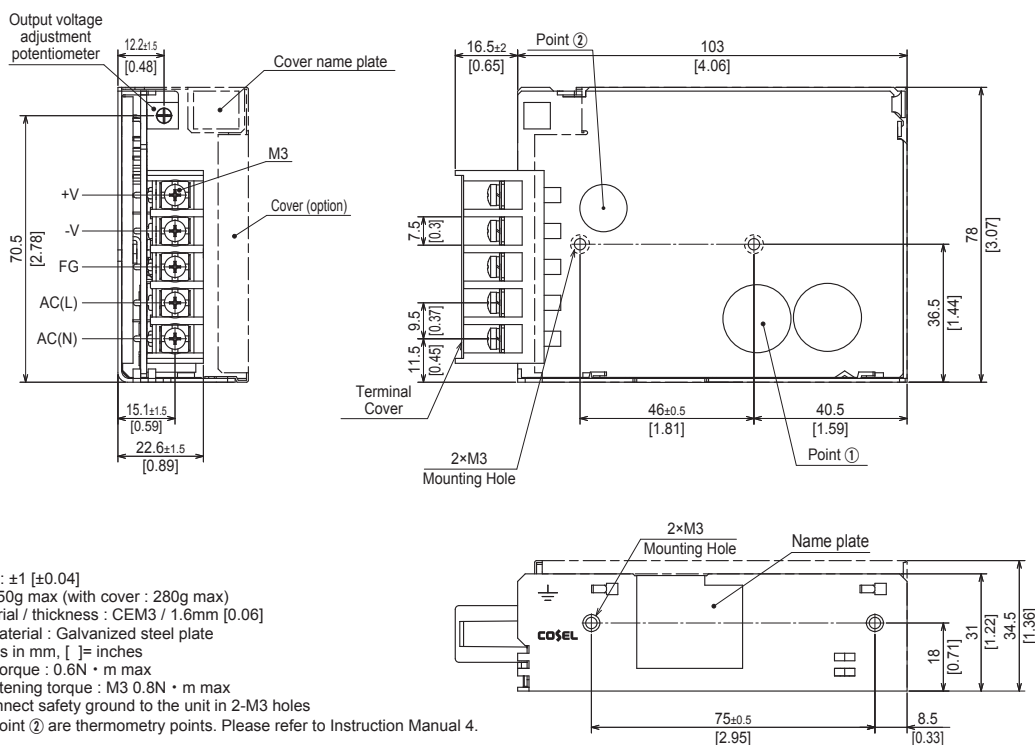

PDA50F

PD A 50 F -□ -□
① ② ③ ④ ⑤ ⑥

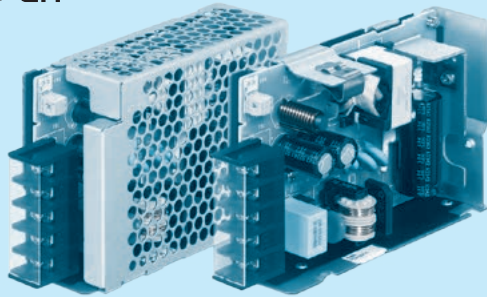

Example recommended EMI/EMC filter
NAC-06-472



High voltage pulse noise type : NAP series
Low leakage current type : NAM series
* A higher current rating EMI/EMC filter may be recommended in view of the other devices that could be connected in parallel with the power supply.

- ① Series name
- ② Single output
- ③ Output wattage
- ④ Universal input
- ⑤ Output voltage
- ⑥ Optional *1
- N : with cover
- C : with Coating
- G : LOW leakage current
- J1 : VH(J.S.T.) connector type
- N1 : with DIN rail and Cover
- T5 : UL508[24V]

For option details, refer to Instruction Manual 8.1.

* Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.

MODEL	PDA50F-3R3	PDA50F-5	PDA50F-12	PDA50F-15	PDA50F-24	PDA50F-36	PDA50F-48
MAX OUTPUT WATTAGE[W]	33	50	51.6	52.5	52.8	50.4	52.8
DC OUTPUT	3.3V 10A	5V 10A	12V 4.3A	15V 3.5A	24V 2.2A	36V 1.4A	48V 1.1A

SPECIFICATIONS

	MODEL	PDA50F-3R3	PDA50F-5	PDA50F-12	PDA50F-15	PDA50F-24	PDA50F-36	PDA50F-48	
INPUT	VOLTAGE[VAC]	85 - 264 1 φ (Refer to Instruction Manual 1.1)							
	CURRENT[A]	ACIN 100V	0.72typ	1.05typ					
		ACIN 230V	0.38typ	0.52typ					
	FREQUENCY[Hz]	50 / 60 (45 - 440)							
	EFFICIENCY[%]	ACIN 100V	80.0typ	81.5typ	82.5typ	83.0typ	85.0typ	85.0typ	86.0typ
		ACIN 230V	82.5typ	85.0typ	85.0typ	85.0typ	87.5typ	87.5typ	88.5typ
	INRUSH CURRENT[A]	ACIN 100V	15typ (lo=100%) at cold start						
	ACIN 230V	35typ (lo=100%) at cold start							
	LEAKAGE CURRENT[ma]	0.3 / 0.65 max (ACIN 100V / 240V, 60Hz, lo=100%, According to IEC62368-1, and DEN-AN)							
OUTPUT	VOLTAGE[V]	3.3	5	12	15	24	36	48	
	CURRENT[A]	10	10	4.3	3.5	2.2	1.4	1.1	
	LINE REGULATION[mV]	20max	20max	48max	60max	96max	144max	192max	
	LOAD REGULATION[mV]	40max	40max	100max	120max	150max	240max	240max	
	RIPPLE[mVp-p]	0 to +50℃	80max	80max	120max	120max	120max	150max	200max
		-20 to 0℃	140max	140max	160max	160max	160max	200max	250max
		lo=0 to 15%	300max	300max	300max	300max	300max	300max	300max
	RIPPLE NOISE[mVp-p]	0 to +50℃	120max	120max	150max	150max	150max	250max	300max
		-20 to 0℃	160max	160max	180max	180max	180max	300max	480max
		lo=0 to 15%	360max	360max	360max	360max	360max	360max	360max
	TEMPERATURE REGULATION[mV]	0 to +50℃	50max	50max	120max	150max	240max	360max	480max
		-20 to +50℃	60max	60max	150max	180max	290max	450max	600max
	DRIFT[mV]	20max	20max	48max	60max	96max	144max	192max	
		START-UP TIME[ms]	80typ (ACIN 100V, lo=100%)						
		HOLD-UP TIME[ms]	20typ (ACIN 100V, lo=100%) / 140typ (ACIN 230V, lo=100%)						
	OUTPUT VOLTAGE ADJUSTMENT RANGE[V]	2.85 to 3.63	4.00 to 5.50	10.00 to 13.20	13.20 to 18.00	19.20 to 27.00	28.80 to 39.60	39.00 to 53.00	
	OUTPUT VOLTAGE SETTING[V]	3.30 to 3.40	5.00 to 5.15	12.00 to 12.48	15.00 to 15.60	24.00 to 24.96	36.00 to 37.44	48.00 to 49.92	
PROTECTION CIRCUIT AND OTHERS	OVERCURRENT PROTECTION	Works over 105% of rating and recovers automatically							
	OVERVOLTAGE PROTECTION	4.00 to 5.25	5.75 to 7.00	15.00 to 18.00	20.00 to 25.00	30.00 to 37.00	43.00 to 50.00	58.00 to 67.00	
	REMOTE SENSING	Not provided							
ISOLATION	INPUT-OUTPUT	3,000VAC 1minute, Cutoff current = 10mA, 500VDC 100MΩ min (At Room Temperature)							
	INPUT-FG	2,000VAC 1minute, Cutoff current = 10mA, 500VDC 100MΩ min (At Room Temperature)							
	OUTPUT-FG	500VAC 1minute, Cutoff current = 25mA, 500VDC 100MΩ min (At Room Temperature)							
ENVIRONMENT	OPERATING TEMP.,HUMID.AND ALTITUDE	-20 to +70℃, 20 - 90%RH (Non condensing), 5,000m (16,500feet) max							
	STORAGE TEMP.,HUMID.AND ALTITUDE	-20 to +75℃, 20 - 90%RH (Non condensing), 9,000m (30,000feet) max							
	VIBRATION	10 - 55Hz, 19.6m/s ² (2G), 3minutes period, 60minutes each along X, Y and Z axis							
	IMPACT	196.1m/s ² (20G), 11ms, once each X, Y and Z axis							
SAFETY AND NOISE REGULATIONS	AGENCY APPROVALS	UL62368-1, C-UL (equivalent to CAN/CSA-C22.2No.62368-1), EN62368-1, Complies with DEN-AN							
	CONDUCTED NOISE	Complies with CISPR11-B, CISPR32-B, EN55011-B, EN55032-B, FCC Part15-B, FCC Part18-B, VCCI-B							
	HARMONIC ATTENUATOR	Complies with IEC61000-3-2 (Class A) (No built-in power factor correction)							
OTHERS	CASE SIZE/WEIGHT	31 × 82 × 120mm [1.22 × 3.23 × 4.72 inches] (without terminal block) (W × H × D) / 330g max (with cover : 370g max)							
	COOLING METHOD	Convection/Forced air (Requires external fan) (Refer to “Derating”)							

*1 The listed options may affect the published standard specifications. Please contact us for detailed product specifications.

*2 Derating is required. Please contact us for DC input.

*3 At low load conditions, the burst mode operation will start. To check load regulation, you will need to measure the characteristics at average mode with instruments.

*4 This is the value that measured on measuring board with capacitor of 22 μF at 150mm from output terminal.
Measured by 20MHz oscilloscope or Ripple-Noise meter
(Equivalent to KEISOKU-GIKEN:RM104).
Ripple and ripple noise spec is change at Io=0 to 15% by burst operation.

*5 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25℃, with the input voltage held constant at the rated input/output.


*6 Please contact us about another class. When two or more units are operating it may not comply with the IEC61000-3-2. Please contact us for details.

* To meet the specification, do not operate overload condition.

* Parallel operation is not possible.


* Sound noise may be generated by power supply in case of pulse load.

Block diagram

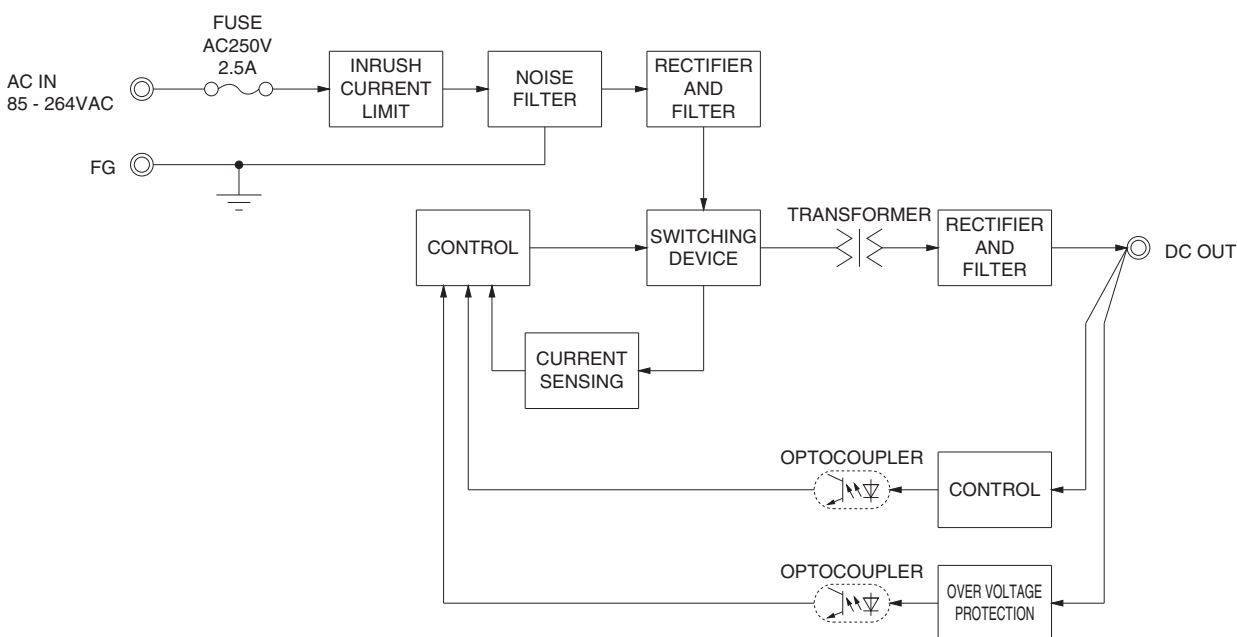

External view

*External size of option J1, N1 and V is different from standard model and refer to 8 option of instruction manual for details.

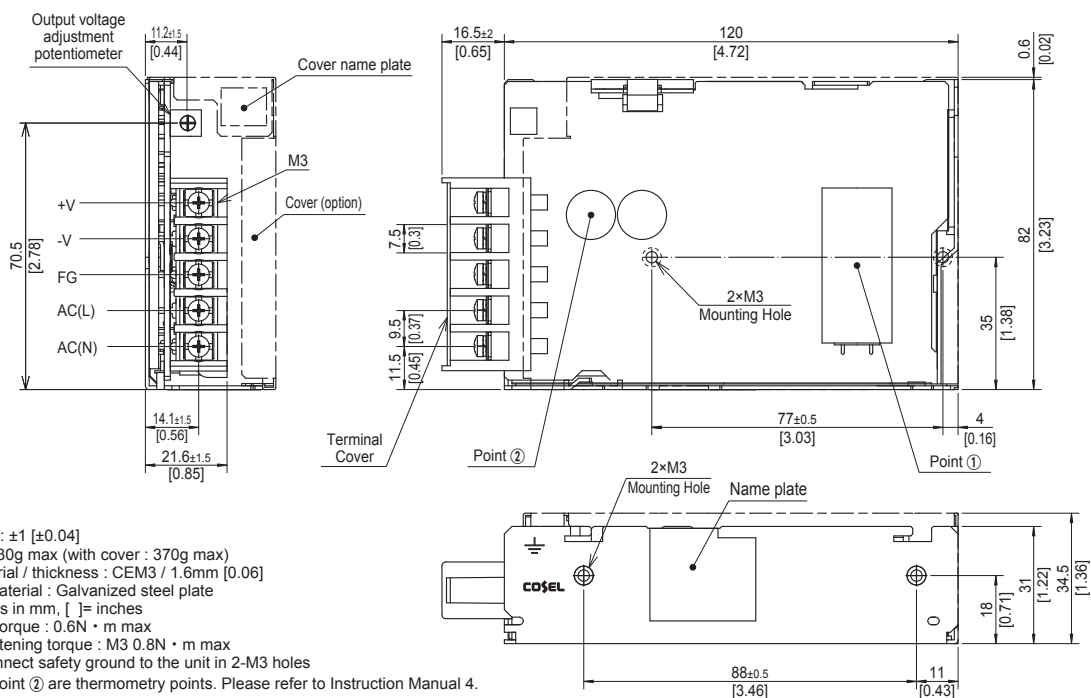

PDA100F

PD

A

100

F

-

-

①


②

③

④

⑤

⑥

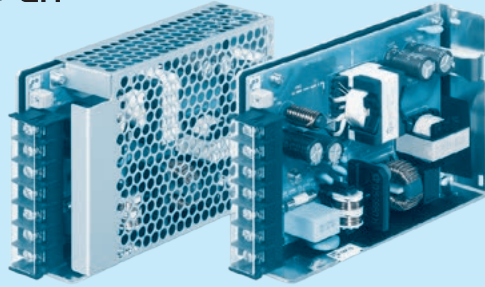

Example recommended EMI/EMC filter
NAC-06-472



High voltage pulse noise type : NAP series
Low leakage current type : NAM series
* A higher current rating EMI/EMC filter
may be recommended in view of the
other devices that could be connected
in parallel with the power supply.

- ① Series name
② Single output
③ Output wattage
④ Universal input
⑤ Output voltage
⑥ Optional *1
N : with cover
C : with Coating
G : LOW leakage current
J1 : VH(J.S.T.) Connector type
(only -12, -15, -24, -36, -48)
N1 : with DIN rail and Cover
T5 : UL508[24V]

For option details, refer to
Instruction Manual 8.1.

* Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.

MODEL	PDA100F-3R3	PDA100F-5	PDA100F-12	PDA100F-15	PDA100F-24	PDA100F-36	PDA100F-48
MAX OUTPUT WATTAGE[W]	*2 66	100	102	105	108	100.8	100.8
DC OUTPUT	*2 3.3V 20A	5V 20A	12V 8.5A	15V 7A	24V 4.5A	36V 2.8A	48V 2.1A

SPECIFICATIONS

	MODEL	PDA100F-3R3	PDA100F-5	PDA100F-12	PDA100F-15	PDA100F-24	PDA100F-36	PDA100F-48	
INPUT	VOLTAGE[VAC]	#2 85 - 264 1 φ (Refer to Instruction Manual 1.1)							
	CURRENT[A]	ACIN 100V	0.9typ	1.3typ					
		ACIN 230V	0.4typ	0.6typ					
	FREQUENCY[Hz]	50 / 60 (45 - 66)							
	EFFICIENCY[%]	ACIN 100V	85.0typ	87.0typ	88.5typ	88.5typ	87.5typ	87.5typ	88.0typ
		ACIN 230V	86.5typ	89.5typ	91.0typ	91.0typ	89.5typ	90.0typ	90.5typ
	POWER FACTOR (lo=100%)	ACIN 100V	0.97typ	0.97typ					
		ACIN 230V	0.81typ	0.87typ					
INRUSH CURRENT[A]	ACIN 100V	15typ (lo=100%) at cold start							
	ACIN 230V	35typ (lo=100%) at cold start							
	LEAKAGE CURRENT[mA]	0.4 / 0.75 max (ACIN 100V / 240V, 60Hz, lo=100%, According to IEC62368-1, and DEN-AN)							
OUTPUT	VOLTAGE[V]	3.3	5	12	15	24	36	48	
	CURRENT[A]	#2 20	20	8.5	7	4.5	2.8	2.1	
	LINE REGULATION[mV]	#3 20max	20max	48max	60max	96max	144max	192max	
	LOAD REGULATION[mV]	#3 40max	40max	100max	120max	150max	240max	240max	
	RIPPLE[mVp-p]	0 to +50℃	80max	80max	120max	120max	120max	150max	150max
		-20 to 0℃	140max	140max	160max	160max	160max	200max	200max
	RIPPLE NOISE[mVp-p]	lo=0 to 15%	300max	300max	360max	500max	500max	500max	500max
		0 to +50℃	120max	120max	150max	150max	150max	250max	250max
		-20 to 0℃	160max	160max	180max	180max	180max	300max	300max
		lo=0 to 15%	360max	360max	400max	600max	600max	600max	600max
	TEMPERATURE REGULATION[mV]	0 to +50℃	50max	50max	120max	150max	240max	360max	480max
		-20 to +50℃	60max	60max	150max	180max	290max	450max	600max
	DRIFT[mV]	#5 20max	20max	48max	60max	96max	144max	192max	
		START-UP TIME[ms]	100typ (ACIN 100V, lo=100%)						
	HOLD-UP TIME[ms]	20typ (ACIN 100V, lo=100%)							
	OUTPUT VOLTAGE ADJUSTMENT RANGE[V]	2.85 to 3.63	4.00 to 5.50	10.00 to 13.20	13.20 to 18.00	19.20 to 27.00	28.80 to 39.60	39.00 to 53.00	
	OUTPUT VOLTAGE SETTING[V]	3.30 to 3.40	5.00 to 5.15	12.00 to 12.48	15.00 to 15.60	24.00 to 24.96	36.00 to 37.44	48.00 to 49.92	
PROTECTION CIRCUIT AND OTHERS	OVERCURRENT PROTECTION	Works over 105% of rating and recovers automatically							
	OVERVOLTAGE PROTECTION	4.00 to 5.25	5.75 to 7.00	15.00 to 18.00	20.00 to 25.00	30.00 to 37.00	43.00 to 50.00	58.00 to 67.00	
	REMOTE SENSING	Not provided							
ISOLATION	INPUT-OUTPUT	3,000VAC 1minute, Cutoff current = 10mA, 500VDC 100MΩ min (At Room Temperature)							
	INPUT-FG	2,000VAC 1minute, Cutoff current = 10mA, 500VDC 100MΩ min (At Room Temperature)							
	OUTPUT-FG	500VAC 1minute, Cutoff current = 25mA, 500VDC 100MΩ min (At Room Temperature)							
ENVIRONMENT	OPERATING TEMPERATURE,HUMID	#2 -20 to +70℃, 20 - 90%RH (Non condensing)							
	STORAGE TEMPERATURE,HUMID	-20 to +75℃, 20 - 90%RH (Non condensing)							
	VIBRATION	10 - 55Hz, 19.6m/s ² (2G), 3minutes period, 60minutes each along X, Y and Z axis							
	IMPACT	196.1m/s ² (20G), 11ms, once each X, Y and Z axis							
SAFETY AND NOISE REGULATIONS	AGENCY APPROVALS	UL62368-1, C-UL (equivalent to CAN/CSA-C22.2No.62368-1), EN62368-1, Complies with DEN-AN							
	CONDUCTED NOISE	Complies with CISPR11-B, CISPR32-B, EN55011-B, EN55032-B, FCC Part15-B, FCC Part18-B, VCCI-B							
	HARMONIC ATTENUATOR	#6 Complies with IEC61000-3-2 (Class A)							
OTHERS	CASE SIZE/WEIGHT	32 X 93 X 147mm [1.26x3.66x5.79 inches] (without terminal block) (W X H X D) / 440g max (with cover : 500g max)							
	COOLING METHOD	#2 Convection/Forced air (Requires external fan) (Refer to “Derating”)							

*1 The listed options may affect the published standard specifications. Please contact us for detailed product specifications.

*2 Derating is required. Please contact us for DC input.

*3 At low load conditions, the burst mode operation will start. To check load regulation, you will need to measure the characteristics at average mode with instruments.

*4 This is the value that measured on measuring board with capacitor of 22 μ F at 150mm from output terminal.
Measured by 20MHz oscilloscope or Ripple-Noise meter

(Equivalent to KEISOKU-GIKEN:RM104).

Ripple and ripple noise spec is change at $lo=0$ to 15% by burst operation.

*5 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C, with the input voltage held constant at the rated input/output.


*6 Please contact us about another class. When two or more units are operating it may not comply with the IEC61000-3-2. Please contact us for details.

To meet the specification, do not operate overload condition.

Parallel operation is not possible.


Sound noise may be generated by power supply in case of pulse load.

Block diagram

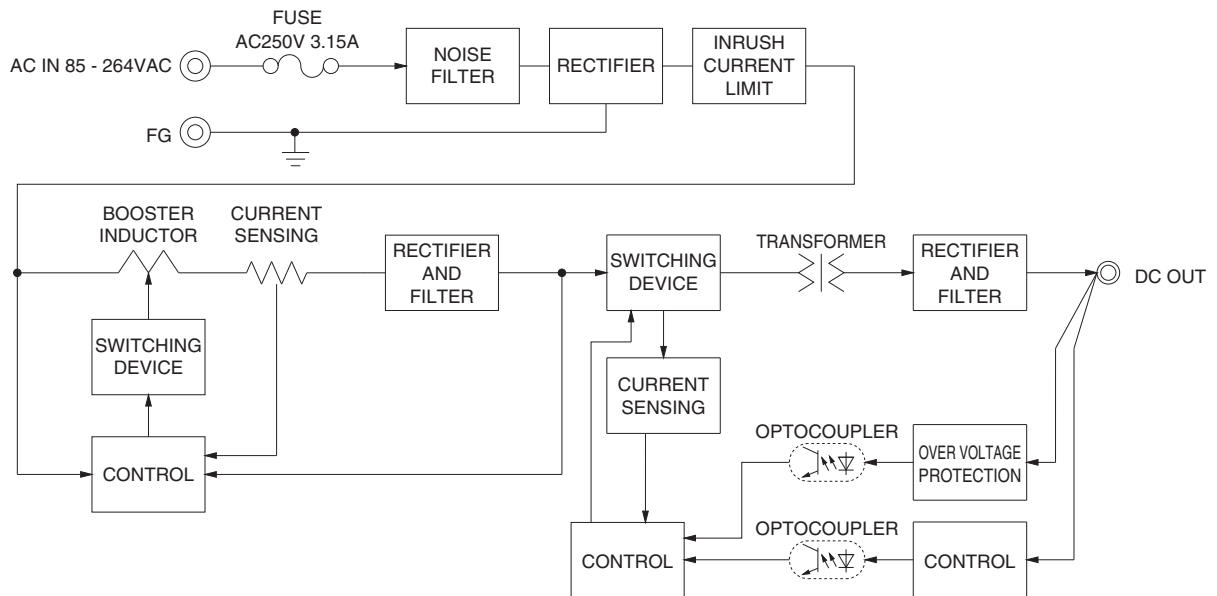

External view

*External size of option J1, N1 and V is different from standard model and refer to 8 option of instruction manual for details.

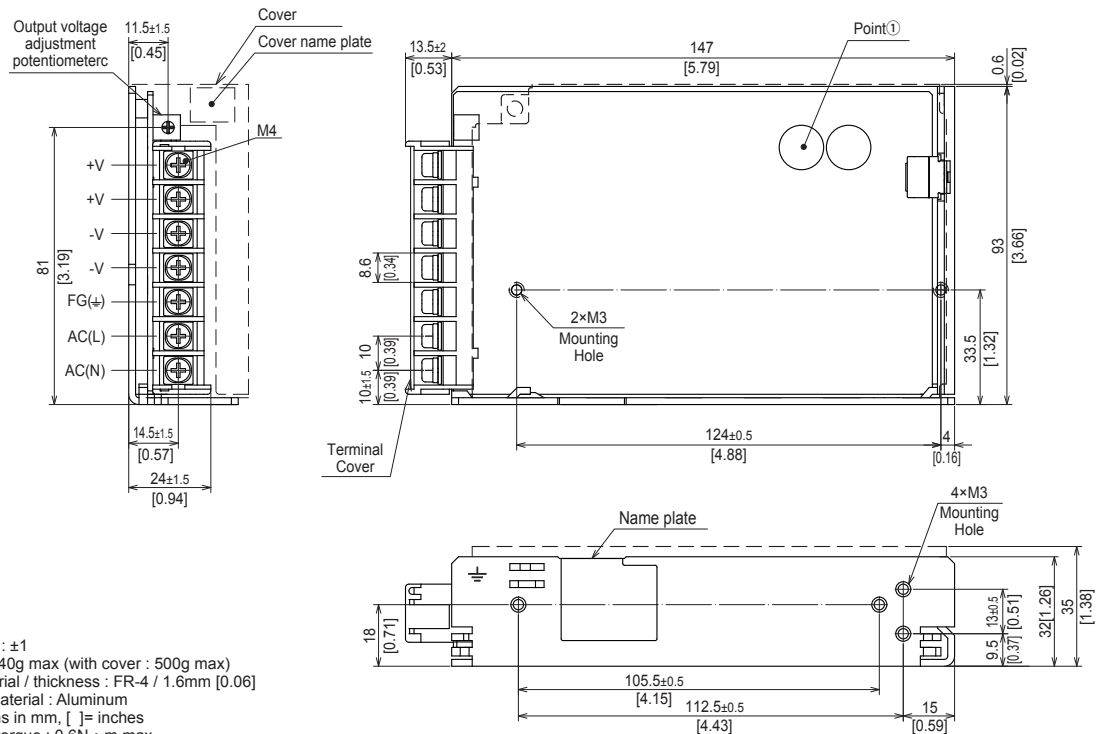

- * Tolerance : ± 1
- * Weight : 440g max (with cover : 500g max)
- * PCB Material / thickness : FR-4 / 1.6mm [0.06]
- * Chassis material : Aluminum
- * Dimensions in mm, [] = inches
- * Mounting torque : 0.6N · m max
- * Screw tightening torque : M4 1.6N · m max
- * Please connect safety ground to the FG terminal on the unit.
- * Point ① is the thermometry points. Please refer to Instruction Manual 4.

PDA150F

PD

A

150

F

-

-

①


②

③

④

⑤

⑥

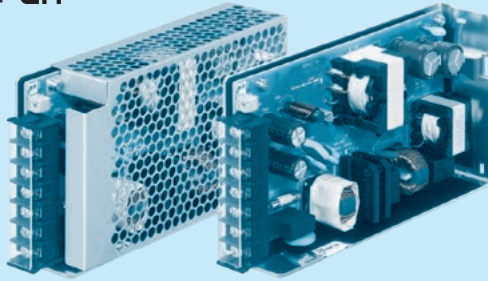

Example recommended EMI/EMC filter
NAC-06-472



High voltage pulse noise type : NAP series
Low leakage current type : NAM series
* A higher current rating EMI/EMC filter
may be recommended in view of the
other devices that could be connected
in parallel with the power supply.

- ① Series name
② Single output
③ Output wattage
④ Universal input
⑤ Output voltage
⑥ Optional *1
N : with cover
C : with Coating
G : LOW leakage current
J1 : VH(J.S.T.) Connector type
(only -12, -15, -24, -36, -48)
N1 : with DIN rail and Cover
T5 : UL508[24V]

For option details, refer to
Instruction Manual 8.1.

* Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.

MODEL	PDA150F-3R3	PDA150F-5	PDA150F-12	PDA150F-15	PDA150F-24	PDA150F-36	PDA150F-48
MAX OUTPUT WATTAGE[W]	*2 99	150	156	150	156	154.8	158.4
DC OUTPUT	*2 3.3V 30A	5V 30A	12V 13A	15V 10A	24V 6.5A	36V 4.3A	48V 3.3A

SPECIFICATIONS

INPUT	MODEL		PDA150F-3R3	PDA150F-5	PDA150F-12	PDA150F-15	PDA150F-24	PDA150F-36	PDA150F-48
	VOLTAGE[VAC]		*2 85 - 264 1 φ (Refer to Instruction Manual 1.1)						
	CURRENT[A]	ACIN 100V	1.2typ	1.8typ					
		ACIN 230V	0.6typ	0.9typ					
	FREQUENCY[Hz]		50 / 60 (45 - 66)						
	EFFICIENCY[%]	ACIN 100V	84.0typ	85.0typ	87.0typ	88.5typ	87.0typ	88.0typ	88.5typ
		ACIN 230V	86.0typ	87.5typ	89.0typ	89.5typ	89.0typ	90.0typ	90.5typ
	POWER FACTOR (lo=100%)	ACIN 100V	0.97typ						
ACIN 230V		0.84typ							
INRUSH CURRENT[A]	ACIN 100V	15typ (lo=100%) at cold start							
	ACIN 230V	35typ (lo=100%) at cold start							
LEAKAGE CURRENT[mA]		0.4 / 0.75 max (ACIN 100V / 240V, 60Hz, lo=100%, According to IEC62368-1, and DEN-AN)							
OUTPUT	VOLTAGE[V]		3.3	5	12	15	24	36	48
	CURRENT[A]		30	30	13	10	6.5	4.3	3.3
	LINE REGULATION[mV]		*3 20max	20max	48max	60max	96max	144max	192max
	LOAD REGULATION[mV]		*3 40max	40max	100max	120max	150max	240max	240max
	RIPPLE[mVp-p]	0 to +50°C	80max	80max	120max	120max	120max	150max	150max
		-20 to 0°C	140max	140max	160max	160max	160max	200max	200max
		lo=0 to 15%	300max	300max	360max	500max	500max	500max	500max
	RIPPLE NOISE[mVp-p]	0 to +50°C	120max	120max	150max	150max	150max	250max	250max
		-20 to 0°C	160max	160max	180max	180max	180max	300max	300max
		lo=0 to 15%	360max	360max	400max	600max	600max	600max	600max
	TEMPERATURE REGULATION[mV]	0 to +50°C	50max	50max	120max	150max	240max	360max	480max
		-20 to +50°C	60max	60max	150max	180max	290max	450max	600max
	DRIFT[mV]		*5 20max	20max	48max	60max	96max	144max	192max
	START-UP TIME[ms]		120typ (ACIN 100V, lo=100%)						
HOLD-UP TIME[ms]		20typ (ACIN 100V, lo=100%)							
OUTPUT VOLTAGE ADJUSTMENT RANGE[V]		2.85 to 3.63	4.00 to 5.50	10.00 to 13.20	13.20 to 18.00	19.20 to 27.00	28.80 to 39.60	39.00 to 53.00	
OUTPUT VOLTAGE SETTING[V]		3.30 to 3.40	5.00 to 5.15	12.00 to 12.48	15.00 to 15.60	24.00 to 24.96	36.00 to 37.44	48.00 to 49.92	
PROTECTION CIRCUIT AND OTHERS	OVERCURRENT PROTECTION		Works over 105% of rating and recovers automatically						
	OVERVOLTAGE PROTECTION		4.00 to 5.25	5.75 to 7.00	15.00 to 18.00	20.00 to 25.00	30.00 to 37.00	43.00 to 50.00	58.00 to 67.00
	REMOTE SENSING		Not provided						
ISOLATION	INPUT-OUTPUT		3,000VAC 1minute, Cutoff current = 10mA, 500VDC 100MΩ min (At Room Temperature)						
	INPUT-FG		2,000VAC 1minute, Cutoff current = 10mA, 500VDC 100MΩ min (At Room Temperature)						
	OUTPUT-FG		500VAC 1minute, Cutoff current = 25mA, 500VDC 100MΩ min (At Room Temperature)						
ENVIRONMENT	OPERATING TEMPERATURE,HUMID		*2 -20 to +70°C, 20 - 90%RH (Non condensing)						
	STORAGE TEMPERATURE,HUMID		-20 to +75°C, 20 - 90%RH (Non condensing)						
	VIBRATION		10 - 55Hz, 19.6m/s² (2G), 3minutes period, 60minutes each along X, Y and Z axis						
	IMPACT		196.1m/s² (20G), 11ms, once each X, Y and Z axis						
SAFETY AND NOISE REGULATIONS	AGENCY APPROVALS		UL62368-1, C-UL (equivalent to CAN/CSA-C22.2No.62368-1), EN62368-1, Complies with DEN-AN						
	CONDUCTED NOISE		Complies with CISPR11-B, CISPR32-B, EN55011-B, EN55032-B, FCC Part15-B, FCC Part18-B, VCCI-B						
	HARMONIC ATTENUATOR		*6 Complies with IEC61000-3-2 (Class A)						
OTHERS	CASE SIZE/WEIGHT		34 X 93 X 168mm [1.34x3.66x6.61 inches] (without terminal block) (W X H X D) / 530g max (with cover : 600g max)						
	COOLING METHOD		*2 Convection/Forced air (Requires external fan) (Refer to “Derating”)						

*1 The listed options may affect the published standard specifications. Please contact us for detailed product specifications.

*2 Derating is required. Please contact us for DC input.

*3 At low load conditions, the burst mode operation will start. To check load regulation, you will need to measure the characteristics at average mode with instruments.

*4 This is the value that measured on measuring board with capacitor of 22 μ F at 150mm from output terminal.
Measured by 20MHz oscilloscope or Ripple-Noise meter

(Equivalent to KEISOKU-GIKEN:RM104).

Ripple and ripple noise spec is change at $lo=0$ to 15% by burst operation.

*5 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C, with the input voltage held constant at the rated input/output.


*6 Please contact us about another class. When two or more units are operating it may not comply with the IEC61000-3-2. Please contact us for details.

To meet the specification, do not operate overload condition.

Parallel operation is not possible.


Sound noise may be generated by power supply in case of pulse load.

Block diagram

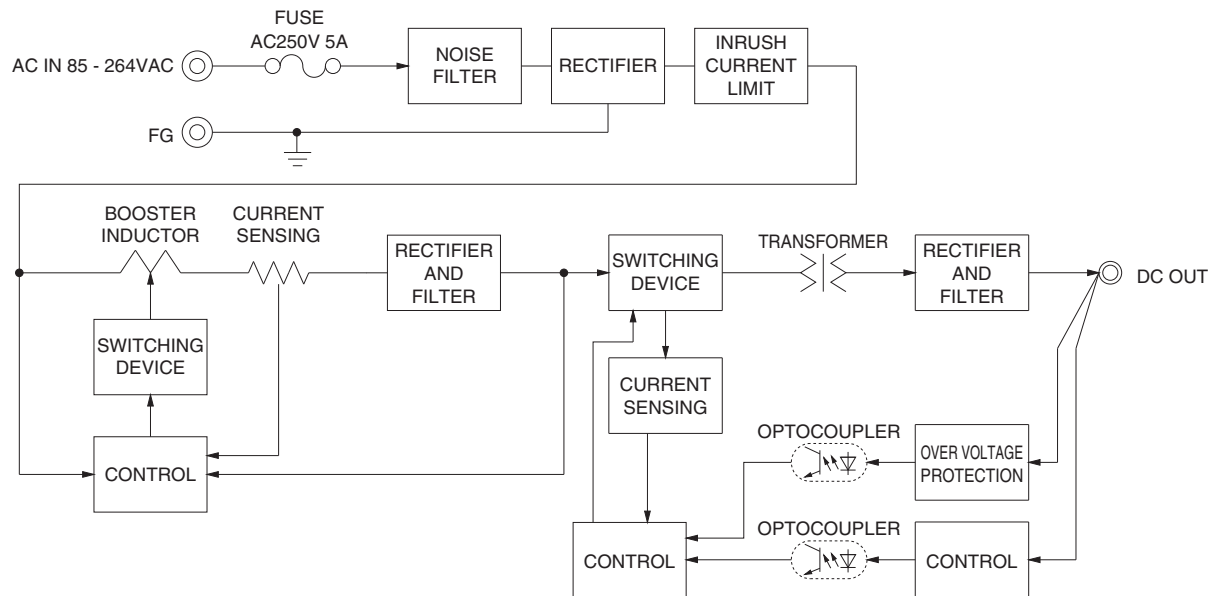

External view


*External size of option J1, N1 and V is different from standard model and refer to 8 option of instruction manual for details.

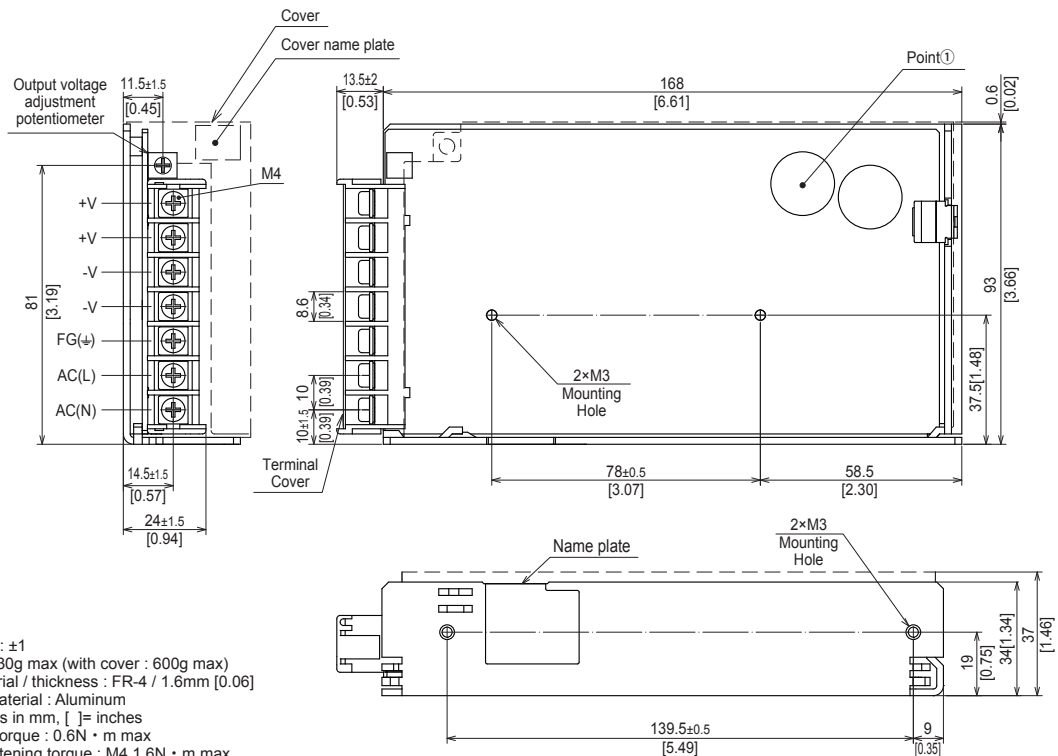

- * Tolerance : ± 1
- * Weight : 530g max (with cover : 600g max)
- * PCB Material / thickness : FR-4 / 1.6mm [0.06]
- * Chassis material : Aluminum
- * Dimensions in mm, [] = inches
- * Mounting torque : $0.6N \cdot m$ max
- * Screw tightening torque : $M4 \ 1.6N \cdot m$ max
- * Please connect safety ground to the FG terminal on the unit.
- * Keep drawing current per pin below 20A for TB1.
- * Point ① is the thermometry points. Please refer to Instruction Manual 4.

PDA300F

PD A 300 F - -

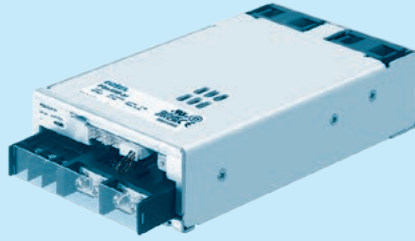

Example recommended EMI/EMC filter
NAC-06-472



High voltage pulse noise type : NAP series
Low leakage current type : NAM series
* A higher current rating EMI/EMC filter
may be recommended in view of the
other devices that could be connected
in parallel with the power supply.

- ① Series name
- ② Single output
- ③ Output wattage
- ④ Universal input
- ⑤ Output voltage
- ⑥ Optional *1
- C : with Coating
- G : LOW leakage current
- N1 : with DIN rail

MODEL	PDA300F-3R3	PDA300F-5	PDA300F-12	PDA300F-15	PDA300F-24	PDA300F-36	PDA300F-48
MAX OUTPUT WATTAGE[W]	198	300	324	330	336	324	336
DC OUTPUT	ACIN 100V	3.3V 60A	5V 60A	12V 27A	15V 22A	24V 14A	36V 9A
	ACIN 230V	3.3V 60A	5V 60A	12V 27A	15V 22A	24V 14 (16.5) A	36V 9A


SPECIFICATIONS

	MODEL		PDA300F-3R3	PDA300F-5	PDA300F-12	PDA300F-15	PDA300F-24	PDA300F-36	PDA300F-48
INPUT	VOLTAGE[VAC]		*2 85 - 264 1 φ (Refer to Instruction Manual 1.1)						
	CURRENT[A]	ACIN 100V	2.9typ	4.1typ					
		ACIN 230V	1.4typ	1.9typ					
	FREQUENCY[Hz]		50 / 60 (45-66)						
	EFFICIENCY[%]	ACIN 100V	70.0typ	75.0typ	79.0typ	80.5typ	82.0typ	81.0typ	82.5typ
		ACIN 230V	72.5typ	78.0typ	82.0typ	84.0typ	84.5typ	84.5typ	86.0typ
	POWER FACTOR (Io=100%)	ACIN 100V	0.99typ						
		ACIN 230V	0.95typ						
INRUSH CURRENT[A]	ACIN 100V	20typ (Io=100%) at cold start							
	ACIN 230V	40typ (Io=100%) at cold start							
LEAKAGE CURRENT[ma]		0.4 / 0.75 max (ACIN 100V / 240V, 60Hz, Io=100%, According to IEC62368-1, and DEN-AN)							
OUTPUT	VOLTAGE[V]		3.3	5	12	15	24	36	48
	CURRENT[A]	ACIN 100V	60	60	27	22	14	9	7
		ACIN 230V	60	60	27	22	14 (16.5)	9	7
	LINE REGULATION[mV]		20max	20max	48max	60max	96max	144max	192max
	LOAD REGULATION[mV]		40max	40max	100max	120max	150max	150max	300max
	RIPPLE[mVp-p]	0 to +50℃	80max	80max	120max	120max	120max	150max	150max
		-20 to 0℃	140max	140max	160max	160max	160max	160max	400max
	RIPPLE NOISE[mVp-p]	0 to +50℃	120max	120max	150max	150max	150max	200max	200max
		-20 to 0℃	160max	160max	180max	180max	180max	240max	500max
	TEMPERATURE REGULATION[mV]	0 to +50℃	40max	50max	120max	150max	240max	360max	480max
		-20 to +50℃	60max	75max	180max	180max	290max	440max	600max
	DRIFT[mV]	*5	12max	20max	48max	60max	96max	144max	192max
	START-UP TIME[ms]		300typ (ACIN 100V, Io=100%)						
	HOLD-UP TIME[ms]		35typ (ACIN 100V, Io=100%)						
OUTPUT VOLTAGE ADJUSTMENT RANGE[V]		2.64 to 3.96	3.96 to 6.00	8.25 to 13.20	10.50 to 16.50	16.50 to 26.40	25.20 to 39.60	38.40 to 56.00	
OUTPUT VOLTAGE SETTING[V]		3.30 to 3.40	5.00 to 5.15	12.00 to 12.48	15.00 to 15.60	24.00 to 24.96	36.00 to 37.44	48.00 to 49.92	
PROTECTION CIRCUIT AND OTHERS	OVERCURRENT PROTECTION		Works over 105% of rating and recovers automatically						
	OVERVOLTAGE PROTECTION[V]		4.30 to 6.30	6.50 to 8.00	14.40 to 18.60	18.00 to 23.30	28.80 to 37.20	43.20 to 54.00	57.60 to 80.00
	REMOTE SENSING		Provided						
	REMOTE ON/OFF		Provided						
ISOLATION	INPUT-OUTPUT-RC		3,000VAC 1minute, Cutoff current = 10mA, 500VDC 100MΩmin (At Room Temperature)						
	INPUT-FG		2,000VAC 1minute, Cutoff current = 10mA, 500VDC 100MΩmin (At Room Temperature)						
	OUTPUT-RC-AUX-FG		500VAC 1minute, Cutoff current = 100mA, 500VDC 100MΩmin (At Room Temperature)						
	OUTPUT-RC-AUX		500VAC 1minute, Cutoff current = 100mA, 500VDC 100MΩ min (At Room Temperature)						
ENVIRONMENT	OPERATING TEMP., HUMID. AND ALTITUDE		*2 -20 to +70℃ (Refer to "Derating"), 20 - 90%RH (Non condensing)						
	STORAGE TEMP., HUMID. AND ALTITUDE		-20 to +75℃, 20 - 90%RH (Non condensing)						
	VIBRATION		10 - 55Hz, 19.6m/s ² (2G), 3minutes period, 60minutes each along X, Y and Z axis						
	IMPACT		196.1m/s ² (20G), 11ms, once each X, Y and Z axis						
SAFETY AND NOISE REGULATIONS	AGENCY APPROVALS (At only AC input)		UL62368-1, C-UL (equivalent to CAN/CSA-C22.2No.62368-1), EN62368-1, Complies with DEN-AN						
	CONDUCTED NOISE		Complies with CISPR11-B, CISPR32-B, EN55011-B, EN55032-B, FCC Part15-B, FCC Part18-B, VCCI-B						
	HARMONIC ATTENUATOR		*6 Complies with IEC61000-3-2 (Class A)						
OTHERS	CASE SIZE/WEIGHT		102×42×170mm [4.02×1.65×6.69 inches] (without terminal block and screw) (W×H×D) /1.0kg max						
	COOLING METHOD		*2 Forced cooling (internal fan)						


- *1 The listed options may affect the published standard specifications. Please contact us for detailed product specifications.
- *2 Derating is required. Please contact us for DC input.
- *3 () means peak current. Peak loading for 10s. And Duty 35% max, refer to Instruction manual in detail.
- *4 This is the value measured on measuring board with capacitor of 22μF within 150mm from output terminal.
Measured by 20MHz Oscilloscope or Ripple-Noise meter (Equivalent to KEISOKU-GIKEN : RM-104).

- *5 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C, with the input voltage held constant at the rated input/output.
- *6 Please contact us about another class. When two or more units are operating it may not comply with the IEC61000-3-2. Please contact us for details.
To meet the specification, do not operate overload condition.
Sound noise may be generated by power supply in case of pulse load.

Block diagram

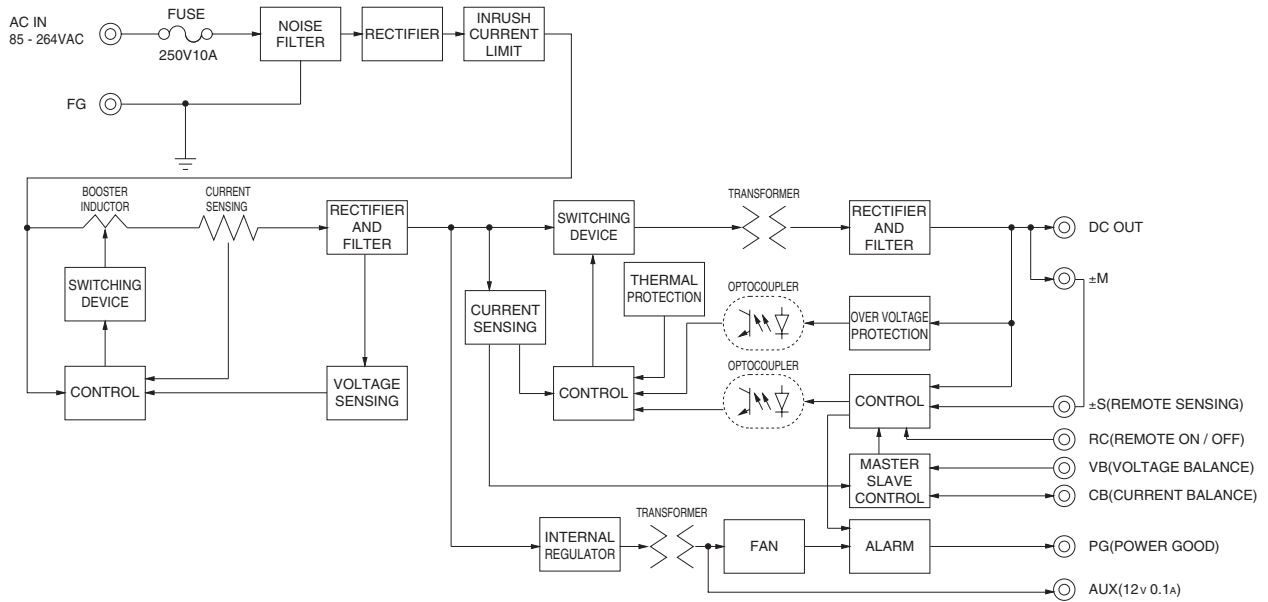

External view

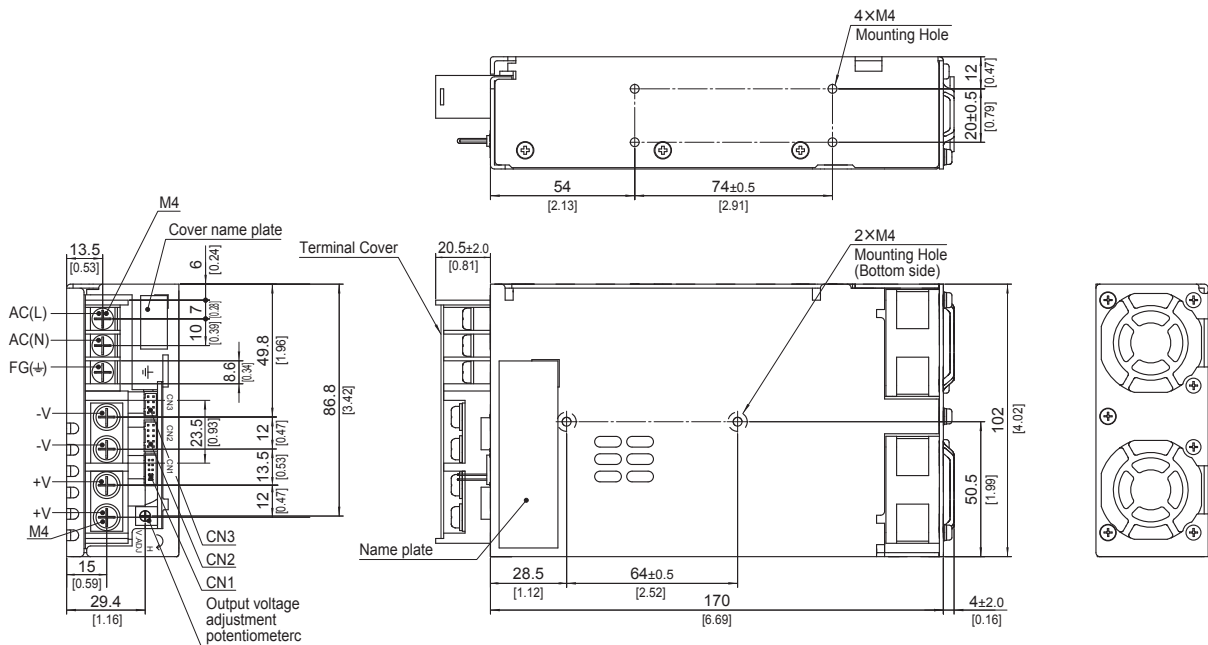

- * Dimensions in mm, []=inches
- * Tolerance : ± 1 [± 0.04]
- * Weight : 1.0kg max
- * PCB Material/thickness : FR-4/1.6mm [0.06]
- * Chassis material : Aluminum
- * Mounting torque : 1.2N • m max
- * Screw tightening torque : M4 : 1.6N • m max
- * The housing for the remote sensing unused is mounted on CN1
- * Please connect safety ground to FG terminal on the unit



PDA600F

PD

A

600

F

-

-

①


②

③

④

⑤

⑥

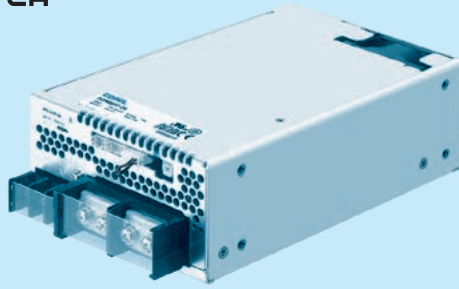

Example recommended EMI/EMC filter
NAC-10-472



High voltage pulse noise type : NAP series
Low leakage current type : NAM series

* A higher current rating EMI/EMC filter
may be recommended in view of the
other devices that could be connected
in parallel with the power supply.

- ① Series name
② Single output
③ Output wattage
④ Universal input
⑤ Output voltage
⑥ Optional *1
C: with Coating
G: LOW leakage current

MODEL		PDA600F-3R3	PDA600F-5	PDA600F-12	PDA600F-15	PDA600F-24	PDA600F-36	PDA600F-48
MAX OUTPUT WATTAGE[W]	*2	396	600	636	645	648	648	624
DC OUTPUT	ACIN 100V	3.3V 120A	5V 120A	12V 53A	15V 43A	24V 27A	36V 18A	48V 13A
	ACIN 230V	*3 3.3V 120A	5V 120A	12V 53A	15V 43A	24V 27(31)A	36V 18A	48V 13A

SPECIFICATIONS

	MODEL		PDA600F-3R3	PDA600F-5	PDA600F-12	PDA600F-15	PDA600F-24	PDA600F-36	PDA600F-48
INPUT	VOLTAGE[VAC]		*2 85 - 264 1 φ (Refer to Instruction Manual 1.1)						
	CURRENT[A]	ACIN 100V	5.2typ	7.9typ					
		ACIN 230V	2.5typ	3.4typ					
	FREQUENCY[Hz]		50 / 60 (45-66)						
	EFFICIENCY[%]	ACIN 100V	73.5typ	78.5typ	83.0typ	83.5typ	85.5typ	84.5typ	86.0typ
		ACIN 230V	75.5typ	81.0typ	85.5typ	86.5typ	88.0typ	87.0typ	89.0typ
	POWER FACTOR (lo=100%)	ACIN 100V	0.98typ						
	ACIN 230V	0.95typ							
	ACIN 100V	20/40typ (lo=100%) (Primary / Secondary inrush current) (More than 3 sec. to re-start)							
	ACIN 230V	40/40typ (lo=100%) (Primary / Secondary inrush current) (More than 3 sec. to re-start)							
	LEAKAGE CURRENT[ma]		0.4 / 0.75 max (ACIN 100V / 240V, 60Hz, lo=100%, According to IEC62368-1, and DEN-AN)						
OUTPUT	VOLTAGE[V]		3.3	5	12	15	24	36	48
	CURRENT[A]	ACIN 100V	120	120	53	43	27	18	13
		ACIN 230V	120	120	53	43	27 (31)	18	13
	LINE REGULATION[mV]		20max	20max	48max	60max	96max	144max	192max
	LOAD REGULATION[mV]		40max	40max	100max	120max	150max	150max	300max
	RIPPLE[mVp-p]	0 to +50℃	80max	80max	120max	120max	120max	150max	150max
		-20 to 0℃	140max	140max	160max	160max	160max	160max	400max
	RIPPLE NOISE[mVp-p]	0 to +50℃	120max	120max	150max	150max	150max	200max	200max
		-20 to 0℃	160max	160max	180max	180max	180max	240max	500max
	TEMPERATURE REGULATION[mV]	0 to +50℃	40max	50max	120max	150max	240max	360max	480max
		-20 to +50℃	60max	75max	180max	180max	290max	440max	600max
	DRIFT[mV]	*5	12max	20max	48max	60max	96max	144max	192max
	START-UP TIME[ms]		400typ (ACIN 100V, lo=100%)						
HOLD-UP TIME[ms]		35typ (ACIN 100V, lo=100%)							
OUTPUT VOLTAGE ADJUSTMENT RANGE[V]		2.64 to 3.96	3.96 to 6.00	8.25 to 13.20	10.50 to 16.50	16.50 to 26.40	25.20 to 39.60	38.40 to 56.00	
OUTPUT VOLTAGE SETTING[V]		3.30 to 3.40	5.00 to 5.15	12.00 to 12.48	15.00 to 15.60	24.00 to 24.96	36.00 to 37.44	48.00 to 49.92	
PROTECTION CIRCUIT AND OTHERS	OVERCURRENT PROTECTION		Works over 105% of rating and recovers automatically						
	OVERVOLTAGE PROTECTION[V]		4.30 to 6.30	6.50 to 8.00	14.40 to 18.60	18.00 to 23.30	28.80 to 37.20	43.20 to 54.00	57.60 to 80.00
	REMOTE SENSING		Provided						
	REMOTE ON/OFF		Provided						
ISOLATION	INPUT-OUTPUT-RC		3,000VAC 1minute, Cutoff current = 10mA, 500VDC 100MΩmin (At Room Temperature)						
	INPUT-FG		2,000VAC 1minute, Cutoff current = 10mA, 500VDC 100MΩmin (At Room Temperature)						
	OUTPUT-RC-AUX-FG		500VAC 1minute, Cutoff current = 100mA, 500VDC 100MΩmin (At Room Temperature)						
	OUTPUT-RC-AUX		500VAC 1minute, Cutoff current = 100mA, 500VDC 100MΩ min (At Room Temperature)						
ENVIRONMENT	OPERATING TEMP., HUMID. AND ALTITUDE		*2 -20 to +70℃ (Refer to "Derating"), 20 - 90%RH (Non condensing)						
	STORAGE TEMP., HUMID. AND ALTITUDE		-20 to +75℃, 20 - 90%RH (Non condensing)						
	VIBRATION		10 - 55Hz, 19.6m/s ² (2G), 3minutes period, 60minutes each along X, Y and Z axis						
	IMPACT		196.1m/s ² (20G), 11ms, once each X, Y and Z axis						
SAFETY AND NOISE REGULATIONS	AGENCY APPROVALS (At only AC input)		UL62368-1, C-UL (equivalent to CAN/CSA-C22.2No.62368-1), EN62368-1, Complies with DEN-AN						
	CONDUCTED NOISE		Complies with CISPR11-B, CISPR32-B, EN55011-B, EN55032-B, FCC Part15-B, FCC Part18-B, VCCI-B						
	HARMONIC ATTENUATOR		*6 Complies with IEC61000-3-2 (Class A)						
OTHERS	CASE SIZE/WEIGHT		120×61×190mm [4.72×2.4×7.48 inches] (without terminal block and screw) (W×H×D) /1.6kg max						
	COOLING METHOD		*2 Forced cooling (internal fan)						

*1 The listed options may affect the published standard specifications. Please contact us for detailed product specifications.

*2 Derating is required. Please contact us for DC input.

*3 () means peak current. Peak loading for 10s. And Duty 35% max, refer to Instruction manual in detail.

*4 This is the value measured on measuring board with capacitor of 22μF within 150mm from output terminal.
Measured by 20MHz Oscilloscope or Ripple-Noise meter (Equivalent to KEISOKU-GIKEN : RM-104).


*5 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C, with the input voltage held constant at the rated input/output.

*6 Please contact us about another class. When two or more units are operating it may not comply with the IEC61000-3-2. Please contact us for details.


To meet the specification, do not operate overload condition.

Sound noise may be generated by power supply in case of pulse load.

Block diagram

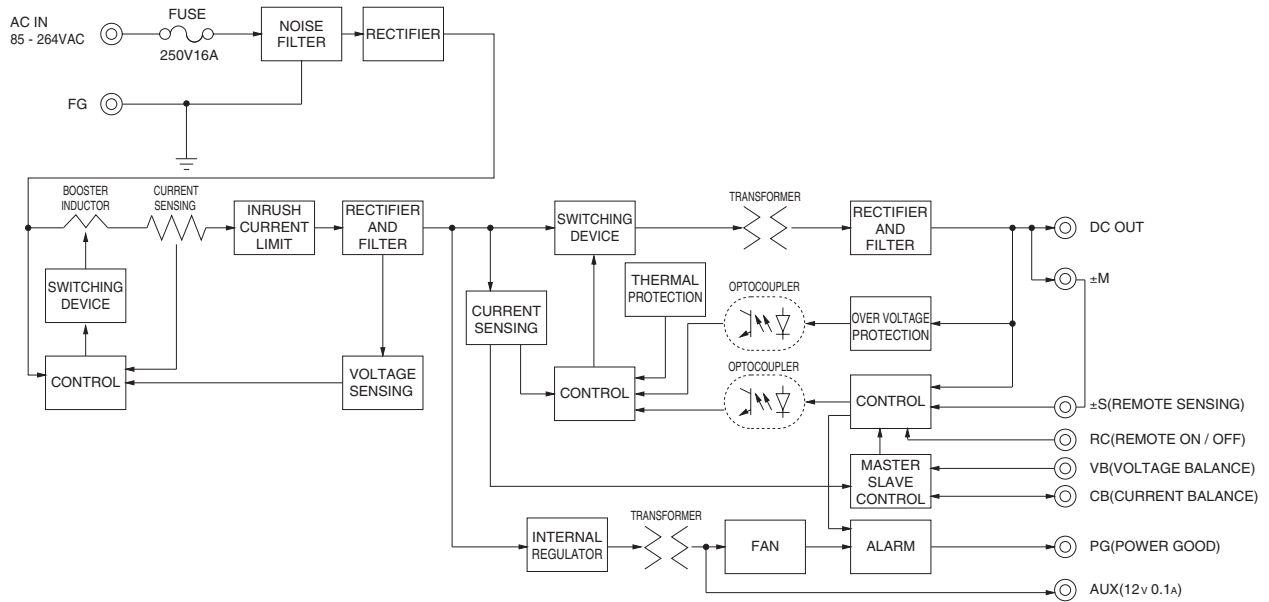

External view

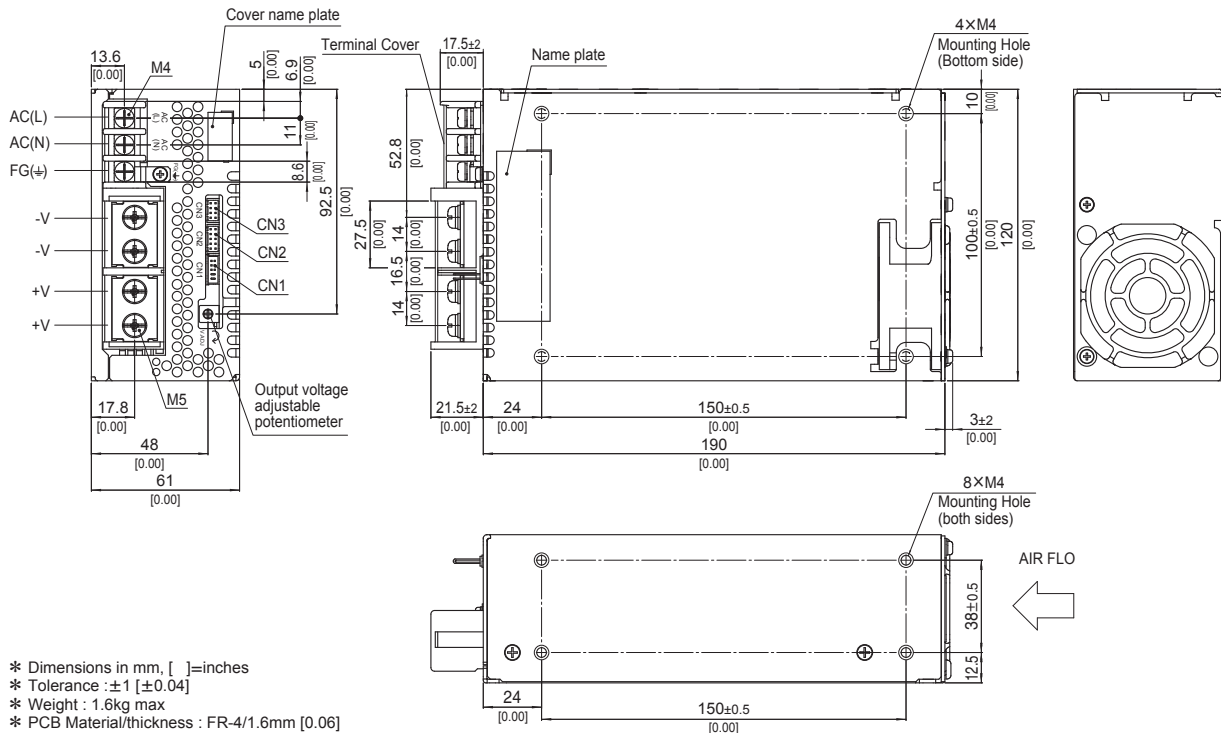

- * Dimensions in mm, []=inches
- * Tolerance : ± 1 [± 0.04]
- * Weight : 1.6kg max
- * PCB Material/thickness : FR-4/1.6mm [0.06]
- * Chassis material : Aluminum
- * Mounting torque : 1.2N • m max
- * Screw tightening torque
 - M4 : 1.6N • m max
 - M5 : 2.5N • m max
- * The housing for the remote sensing unused is mounted on CN1
- * Please connect safety ground to FG terminal on the unit

PDW30F

PD

W

30

F

-

-

①


②

③

④

⑤

⑥

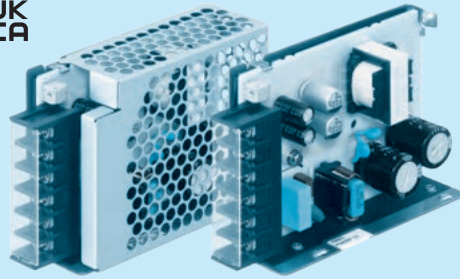

Example recommended EMI/EMC filter
NAC-06-472



High voltage pulse noise type : NAP series
Low leakage current type : NAM series
* A higher current rating EMI/EMC filter
may be recommended in view of the
other devices that could be connected
in parallel with the power supply.

- ① Series name
② Dual output
③ Output wattage
④ Universal input
⑤ Output voltage
⑥ Optional *1
C: with Coating
N: with cover

For option details, refer to
Instruction Manual 8.1.

*Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.

MODEL	PDW30F-12	PDW30F-15
MAX OUTPUT WATTAGE[W]	31.2	30
DC OUTPUT	VOLTAGE[V]	±12 (+24)
	CURRENT1[A]	1.3
	CURRENT2[A]	1.7

SPECIFICATIONS

	MODEL	PDW30F-12	PDW30F-15
INPUT	VOLTAGE[VAC]	85 - 264 1 φ (Refer to Instruction Manual 1.1)	
	CURRENT[A]	ACIN 100V 0.68typ (CURRENT1)	
		ACIN 230V 0.36typ (CURRENT1)	
	FREQUENCY[Hz]	50 / 60 (45 - 440)	
	EFFICIENCY[%]	ACIN 100V 82.0typ (CURRENT1)	83.0typ (CURRENT1)
		ACIN 230V 83.0typ (CURRENT1)	84.0typ (CURRENT1)
	INRUSH CURRENT[A]	ACIN 100V 15typ (CURRENT1) (At cold start)	
		ACIN 230V 35typ (CURRENT1) (At cold start)	
OUTPUT	LEAKAGE CURRENT[ma]	0.2 / 0.5 max (ACIN 100V / 240V, 60Hz, Io=100%, According to IEC62368-1, and DEN-AN)	
	VOLTAGE[V]	±12 / (+24V reference number)	±15 / (+30V reference number)
	CURRENT1[A]	1.3 / 1.3	1.0 / 1.0
	CURRENT2[A]	1.7 / -	1.4 / -
	LINE REGULATION[mV]	48max / 96max	60max / 96max
	LOAD REGULATION 1[mV]	600max / 150max	600max / 150max
	LOAD REGULATION 2[mV]	750max / -	750max / -
	RIPPLE[mVp-p]	0 to +50°C 120max / 240max	120max / 240max
		-20 to 0°C 160max / 320max	160max / 320max
	RIPPLE NOISE[mVp-p]	0 to +50°C 150max / 300max	150max / 300max
		-20 to 0°C 180max / 360max	180max / 360max
	TEMPERATURE REGULATION[mV]	0 to +50°C 120max	150max
		-20 to +50°C 150max	180max
	DRIFT[mV]	48max	60max
	START-UP TIME[ms]	200typ (ACIN 100V, Io=100%)	
	HOLD-UP TIME[ms]	20typ (ACIN 100V, Io=100%)	
	OUTPUT VOLTAGE ADJUSTMENT RANGE[V]	9.60 - 13.2 (+V and -V are simultaneously adjusted)	
	OUTPUT VOLTAGE SETTING[V]	11.5 - 12.5 (+V and -V CURRENT1)	
PROTECTION CIRCUIT AND OTHERS	OVERCURRENT PROTECTION	Works over 105% of rating and recovers automatically	
	OVERVOLTAGE PROTECTION[V]	16.80 - 24.00	20.00 - 29.00
	REMOTE SENSING	None	
ISOLATION	INPUT-OUTPUT	AC3,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At Room Temperature)	
	INPUT-FG	AC2,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At Room Temperature)	
	OUTPUT-FG	AC500V 1minute, Cutoff current = 25mA, DC500V 50MΩ min (At Room Temperature)	
ENVIRONMENT	OPERATING TEMP., HUMID. AND ALTITUDE	-20 to +70°C (Refer to "Derating"), 20 - 90%RH (Non condensing), 3,000m (10,000feet) max	
	STORAGE TEMP., HUMID. AND ALTITUDE	-20 to +75°C, 20 - 90%RH (Non condensing)	
	VIBRATION	10 - 55Hz, 19.6m/s ² (2G), 3minutes period, 60minutes each along X, Y and Z axis	
	IMPACT	196.1m/s ² (20G), 11ms, once each X, Y and Z axis	
SAFETY AND NOISE REGULATIONS	AGENCY APPROVALS	UL62368-1, C-UL (equivalent to CAN/CSA-C22.2No.62368-1), EN62368-1, Complies with DEN-AN	
	CONDUCTED NOISE	Complies with CISPR11-B, CISPR32-B, EN55011-B, EN55032-B, FCC Part15-B, FCC Part18-B, VCCI-B	
	HARMONIC ATTENUATOR *11	Complies with IEC61000-3-2 (Class A) (No built-in power factor correction)	
OTHERS	CASE SIZE/WEIGHT	31 X 78 X 103mm [1.22 X 3.07 X 4.06 inches] (W X H X D) / 250g max (with cover : 280g max)	
	COOLING METHOD	Convection/Forced air (Requires external fan) (Refer to "Derating")	

*1 The listed options may affect the published standard specifications. Please contact us for detailed product specifications.

*2 The sum of +power -power must be less than output power.

*3 ±12, ±15 can be used as +24, +30.

*4 Derating is required. Please contact us for DC input.

*5 Figures to rated current 1.

*6 Figures for 0 to rated current 1. The current not measured side is fixed.

*7 Figures for 0 to rated current 2. The current not measured.

*8 At low load conditions, the burst mode operation will start. To check load regulation, you will need to measure the characteristics at average mode with instruments.

*9 This is the value that measured on measuring board with capacitor of 22 μF at 150mm from

output terminal.

Measured by 20MHz oscilloscope or Ripple-Noise meter

(Equivalent to KEISOKU-GIKEN:RM104).

Ripple and ripple noise spec is change at Io=0 to 10% by burst operation.

*10 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C, with the input voltage held constant at the rated input/output.


*11 Please contact us about another class. When two or more units are operating it may not comply with the IEC61000-3-2. Please contact us for details.

* To meet the specification, do not operate overload condition.


* Parallel operation is not possible.

* Sound noise may be generated by power supply in case of pulse load.

Block diagram

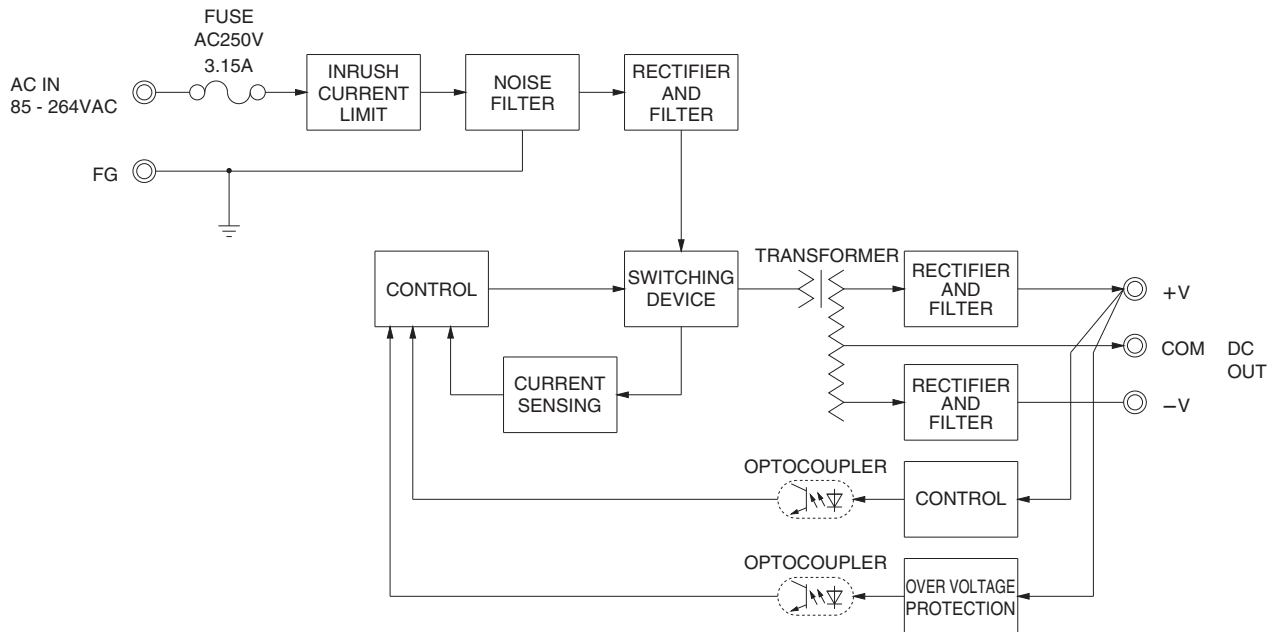


External view

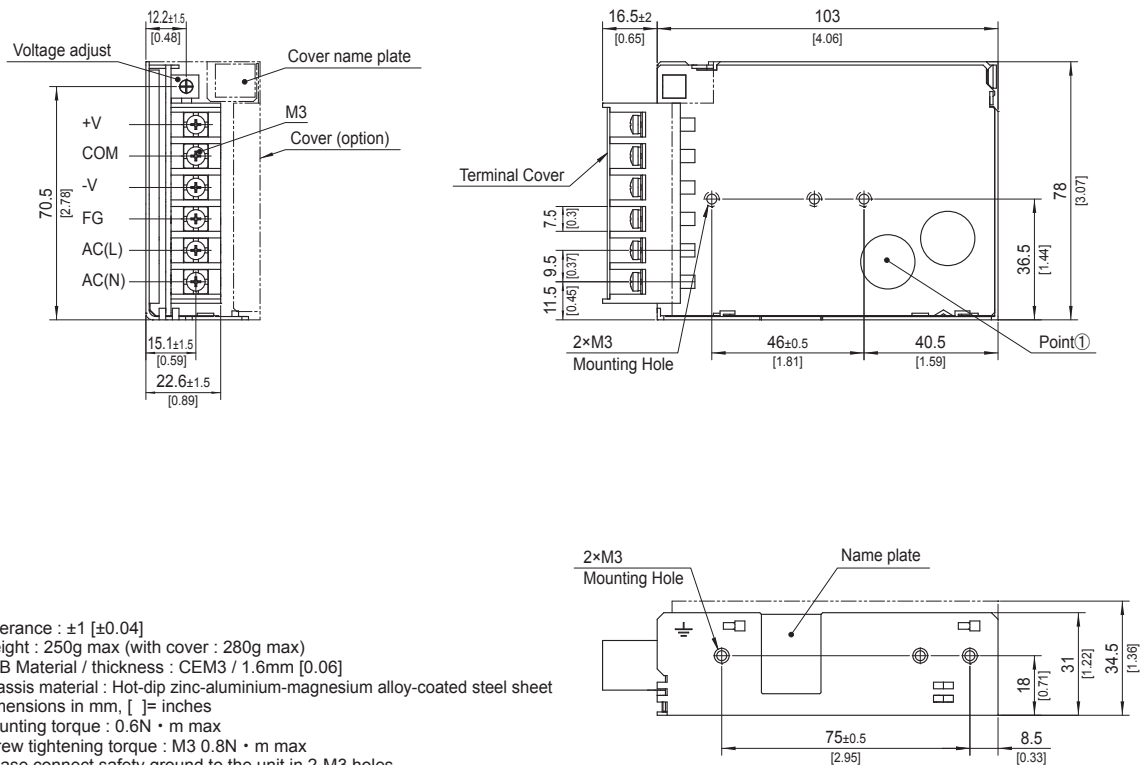

- * Tolerance : ± 1 [± 0.04]
- * Weight : 250g max (with cover : 280g max)
- * PCB Material / thickness : CEM3 / 1.6mm [0.06]
- * Chassis material : Hot-dip zinc-aluminium-magnesium alloy-coated steel sheet
- * Dimensions in mm, [] = inches
- * Mounting torque : 0.6N · m max
- * Screw tightening torque : M3 0.8N · m max
- * Please connect safety ground to the unit in 2-M3 holes
- * Point ① is the thermometry points. Please refer to Instruction Manual 4.

PDW50F

PD W 50 F - -

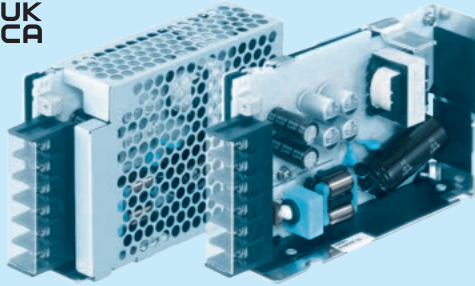

Example recommended EMI/EMC filter
NAC-06-472



High voltage pulse noise type : NAP series
Low leakage current type : NAM series
* A higher current rating EMI/EMC filter
may be recommended in view of the
other devices that could be connected
in parallel with the power supply.

- ① Series name
- ② Dual output
- ③ Output wattage
- ④ Universal input
- ⑤ Output voltage
- ⑥ Optional *1
- C: with Coating
- N: with cover

For option details, refer to
Instruction Manual 8.1.

*Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.

MODEL	PDW50F-12	PDW50F-15
MAX OUTPUT WATTAGE[W]	50.4	51
DC OUTPUT	VOLTAGE[V]	±12 (+24)
	CURRENT1[A]	2.1
	CURRENT2[A]	2.7


SPECIFICATIONS

	MODEL	PDW50F-12	PDW50F-15
INPUT	VOLTAGE[VAC]	85 - 264 1 φ (Refer to Instruction Manual 1.1)	
	CURRENT[A]	ACIN 100V 1.15typ (CURRENT1) ACIN 230V 0.61typ (CURRENT1)	
	FREQUENCY[Hz]	50 / 60 (45 - 440)	
	EFFICIENCY[%]	ACIN 100V 81.0typ (CURRENT1) ACIN 230V 83.0typ (CURRENT1)	82.5typ (CURRENT1) 83.5typ (CURRENT1)
	INRUSH CURRENT[A]	ACIN 100V 15typ (CURRENT1) (At cold start) ACIN 230V 35typ (CURRENT1) (At cold start)	
	LEAKAGE CURRENT[ma]	0.2 / 0.5 max (ACIN 100V / 240V, 60Hz, Io=100%, According to IEC62368-1, and DEN-AN)	
OUTPUT	VOLTAGE[V]	±12 / (+24V reference number)	±15 / (+30V reference number)
	CURRENT1[A]	2.1 / 2.1	1.7 / 1.7
	CURRENT2[A]	2.7 / -	2.4 / -
	LINE REGULATION[mV]	48max / 96max	60max / 96max
	LOAD REGULATION 1[mV]	600max / 150max	600max / 150max
	LOAD REGULATION 2[mV]	750max / -	750max / -
	RIPPLE[mVp-p]	0 to +50°C 120max / 240max -20 to 0°C 160max / 320max	120max / 240max 160max / 320max
	RIPPLE NOISE[mVp-p]	0 to +50°C 150max / 300max -20 to 0°C 180max / 360max	150max / 300max 180max / 360max
	TEMPERATURE REGULATION[mV]	0 to +50°C 120max -20 to +50°C 150max	150max 180max
	DRIFT[mV]	48max	60max
	START-UP TIME[ms]	350typ (ACIN 100V, Io=100%)	
	HOLD-UP TIME[ms]	20typ (ACIN 100V, Io=100%)	
	OUTPUT VOLTAGE ADJUSTMENT RANGE[V]	9.60 - 13.2 (+V and -V are simultaneously adjusted)	13.2 - 16.5 (+V and -V are simultaneously adjusted)
	OUTPUT VOLTAGE SETTING[V]	11.5 - 12.5 (+V and -V CURRENT1)	14.4 - 15.6 (+V and -V CURRENT1)
PROTECTION CIRCUIT AND OTHERS	OVERCURRENT PROTECTION	Works over 105% of rating and recovers automatically	
	OVERVOLTAGE PROTECTION[V]	16.80 - 24.00	20.00 - 29.00
	REMOTE SENSING	None	
ISOLATION	INPUT-OUTPUT	AC3,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At Room Temperature)	
	INPUT-FG	AC2,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At Room Temperature)	
	OUTPUT-FG	AC500V 1minute, Cutoff current = 25mA, DC500V 50MΩ min (At Room Temperature)	
ENVIRONMENT	OPERATING TEMP., HUMID. AND ALTITUDE	-20 to +70°C (Refer to "Derating"), 20 - 90%RH (Non condensing), 3,000m (10,000feet) max	
	STORAGE TEMP., HUMID. AND ALTITUDE	-20 to +75°C, 20 - 90%RH (Non condensing)	
	VIBRATION	10 - 55Hz, 19.6m/s ² (2G), 3minutes period, 60minutes each along X, Y and Z axis	
	IMPACT	196.1m/s ² (20G), 11ms, once each X, Y and Z axis	
SAFETY AND NOISE REGULATIONS	AGENCY APPROVALS	UL62368-1, C-UL (equivalent to CAN/CSA-C22.2No.62368-1), EN62368-1, Complies with DEN-AN	
	CONDUCTED NOISE	Complies with CISPR11-B, CISPR32-B, EN55011-B, EN55032-B, FCC Part15-B, FCC Part18-B, VCCI-B	
	HARMONIC ATTENUATOR	Complies with IEC61000-3-2 (Class A) (No built-in power factor correction)	
OTHERS	CASE SIZE/WEIGHT	31 X 82 X 120mm [1.22 X 3.23 X 4.72 inches] (W X H X D) / 250g max (with cover : 290g max)	
	COOLING METHOD	Convection/Forced air (Requires external fan) (Refer to "Derating")	




- *1 The listed options may affect the published standard specifications. Please contact us for detailed product specifications.
- *2 The sum of +power -power must be less than output power.
- *3 ±12, ±15 can be used as +24, +30.
- *4 Derating is required. Please contact us for DC input.
- *5 Figures to rated current 1.
- *6 Figures for 0 to rated current 1. The current not measured side is fixed.
- *7 Figures for 0 to rated current 2. The current not measured.
- *8 At low load conditions, the burst mode operation will start. To check load regulation, you will need to measure the characteristics at average mode with instruments.
- *9 This is the value that measured on measuring board with capacitor of 22 μF at 150mm from output terminal.

- *10 Measured by 20MHz oscilloscope or Ripple-Noise meter (Equivalent to KEISOKU-GIKEN:RM104).
Ripple and ripple noise spec is change at Io=0 to 10% by burst operation.
Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C, with the input voltage held constant at the rated input/output.
- *11 When the input voltage is below 100VAC or the ambient temperature is below -10°C at startup, the output may fluctuate.
- *12 Please contact us about another class. When two or more units are operating it may not comply with the IEC61000-3-2. Please contact us for details.
- * To meet the specification, do not operate overload condition.
- * Parallel operation is not possible.
- * Sound noise may be generated by power supply in case of pulse load.

Block diagram

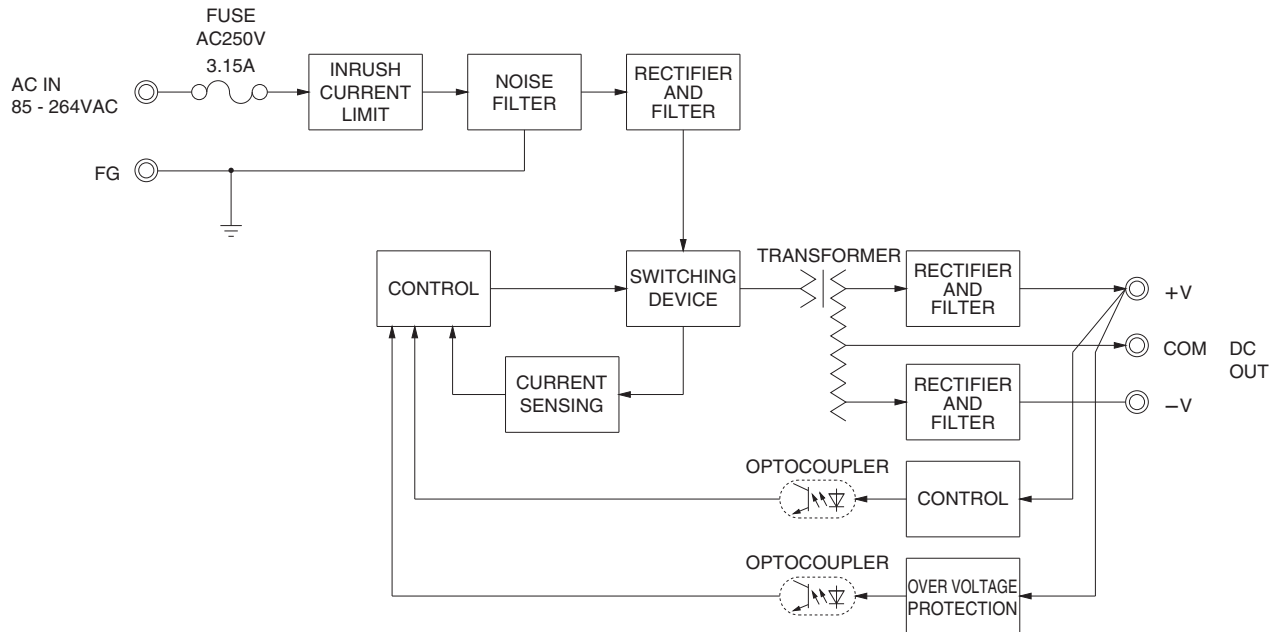

External view

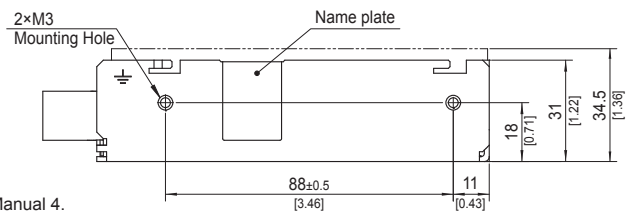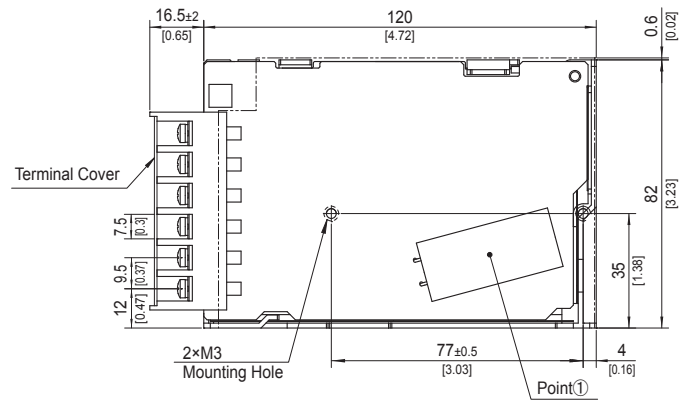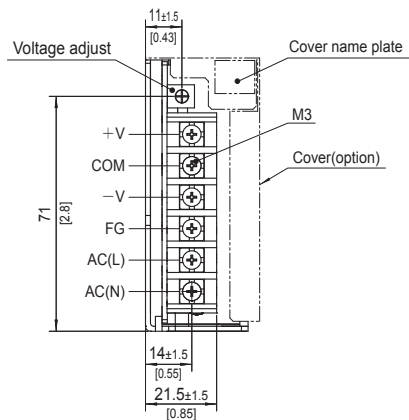


- * Tolerance : ± 1 [± 0.04]
- * Weight : 250g max (with cover : 290g max)
- * PCB Material / thickness : CEM3 / 1.6mm [0.06]
- * Chassis material : Aluminum
- * Dimensions in mm, [] = inches
- * Mounting torque : 0.49N · m max
- * Screw tightening torque : M3 0.8N · m max
- * Please connect safety ground to the unit in 2-M3 holes
- * Point ① is the thermometry points. Please refer to Instruction Manual 4.

Terminal Blocks


* The following information covers PDA300F - 600F. Please see External View for PDA15F - 150F, PDW30F and PDW50F.

● PDA300F

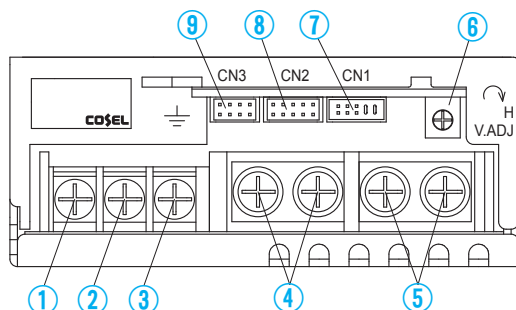


- ①AC (L) } Input Terminals 85 - 264VAC ϕ 45 - 66Hz
- ②AC (N) }
- ③Frame ground (M4 $\perp$)
- ④-Output
- ⑤+Output
- ⑥Output voltage adjustable potentiometer
- ⑦CN1 } Connectors
- ⑧CN2 }
- ⑨CN3 }

● PDA600F

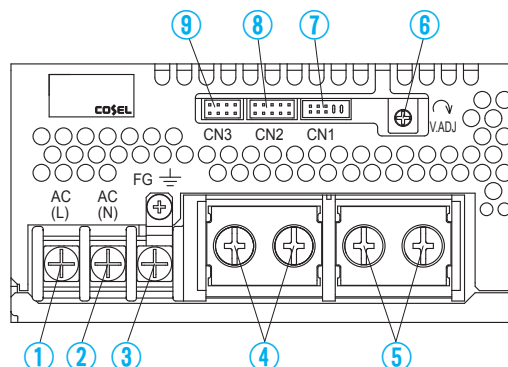

● PDA300F, 600F Pin Configuration



Pin Configuration and Functions of CN1 and CN2

Pin No.	Function
1	+M : Self sensing terminal. (Do not wire for external connection.)
2	+S : +Sensing
3	-M : Self sensing terminal. (Do not wire for external connection.)
4	-S : -Sensing
5	VB : Voltage balance
6	CB : Current balance
7	TRM : Adjustment of output voltage
8	-S : -Sensing
9	RC2 : Remote ON/OFF
10	RCG : Remote ON/OFF (GND)

Pin Configuration and Functions of CN3

Pin No.	Function
1	-S : -Sensing
2	-S : -Sensing
3	AUX : Auxiliary output (12V 0.1A)
4	RC1 : Remote ON/OFF
5	AUXG : Auxiliary output (GND)
6	N.C. : No connection
7	PG : Alarm
8	PGG : Alarm (GND)

* Common signs among CN1, CN2 and CN3 such as -S represent the same potential.


Matching connectors and terminals on CN1, CN2 and CN3

Connector	Housing	Terminal	Mfr.
CN1	S10B-PHDSS	PHDR-10VS	J.S.T.
CN2	S10B-PHDSS	PHDR-10VS	
CN3	S8B-PHDSS	PHDR-08VS	

Assembling and Installation Method


Installation method

- Do not insert a screw more than 6mm from the outside of a power supply to keep enough insulation distance between the screw and internal components.

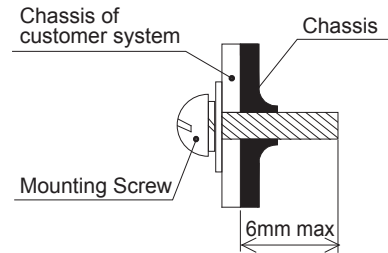


● PDA15F, PDA30F, PDA50F, PDA100F, PDA150F, PDW30F, PDW50F

- For the metal chassis, keep the distance $d1$ for isolation between component and metal chassis. The $d1$ dimension is the distance required for insulation and does not satisfy cooling conditions. For cooling conditions, please refer to "Derating" and section 4 of the instruction manual.

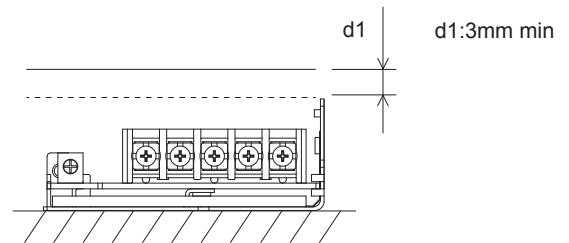


- If you use two or more power supplies side by side, please keep a sufficient distance between them to allow enough air ventilation.
- Ambient temperature around each power supply should not exceed the temperature range shown in "Derating".

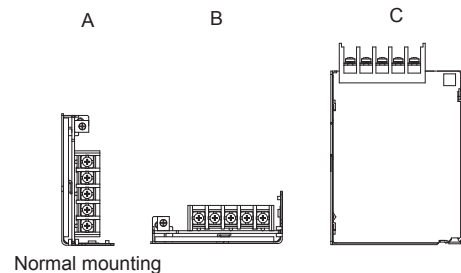


● PDA300F, PDA600F

- If you need to secure a power supply by screws, securely fix it, taking into consideration of its weight. You can install it in any direction.

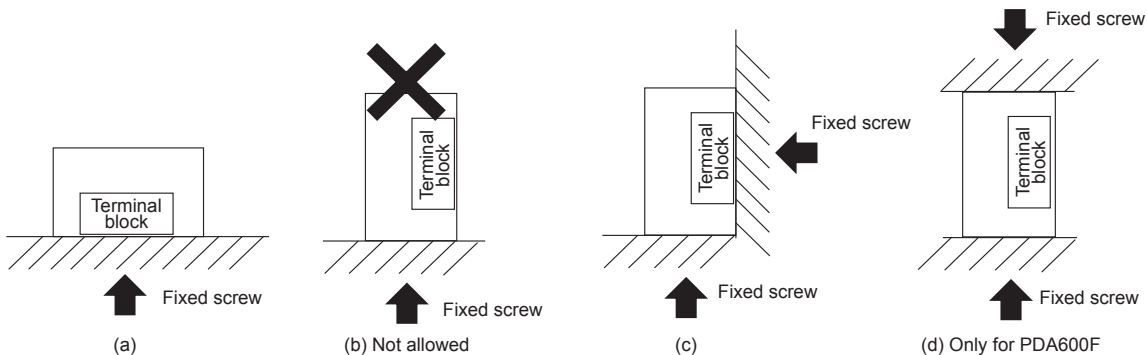


- If you use a power supply in a dusty environment, it can cause a failure. Please consider taking such countermeasures as installing an air filter near the suction area of the system to prevent a failure.
- The power supplies have a built-in forced cooling fan. Do not block ventilation at the suction side and its opposite side.

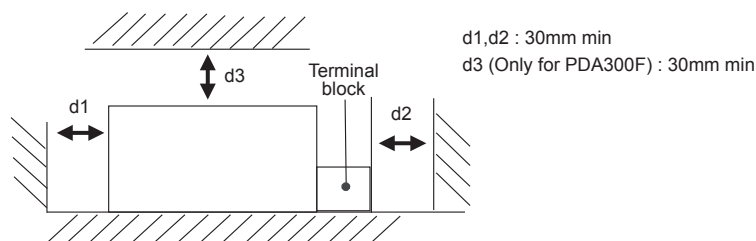


Derating


- Derating curve for input voltage
PDA15F, PDA30F, PDW30F




- PDA15F
Ambient temperature derating curve
(Reference value)

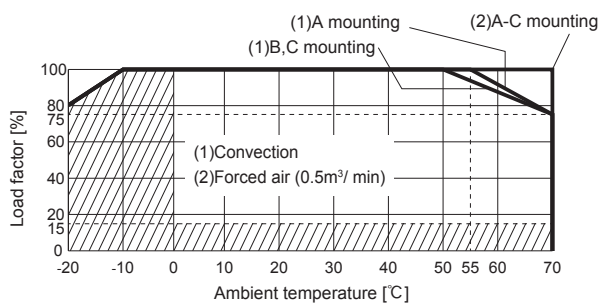


- PDA15F-□-N
Ambient temperature derating curve
(Reference value)

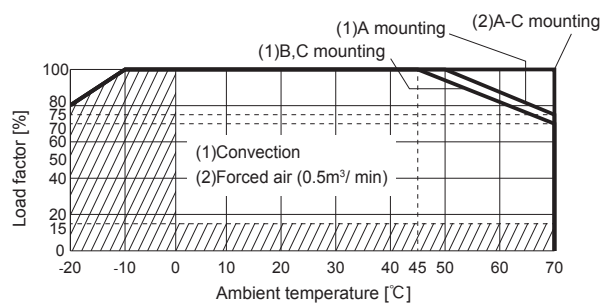


- PDA30F
Ambient temperature derating curve
(Reference value)

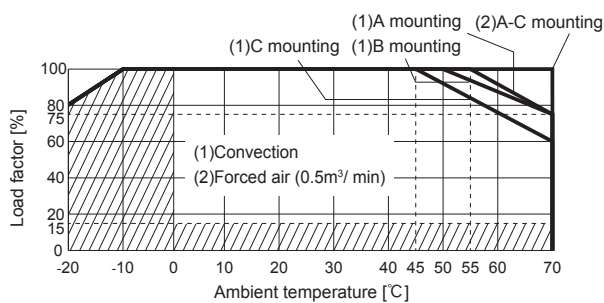


- PDA30F-□-N
Ambient temperature derating curve
(Reference value)

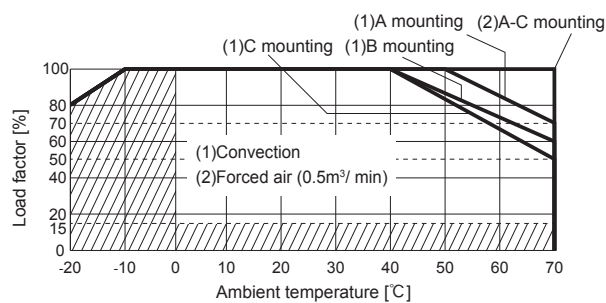

- PDA50F-3R3, -5
Ambient temperature derating curve
(Reference value)

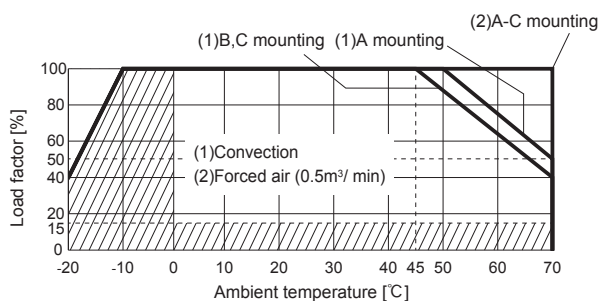


- PDA50F-3R3-N, -5-N
Ambient temperature derating curve
(Reference value)

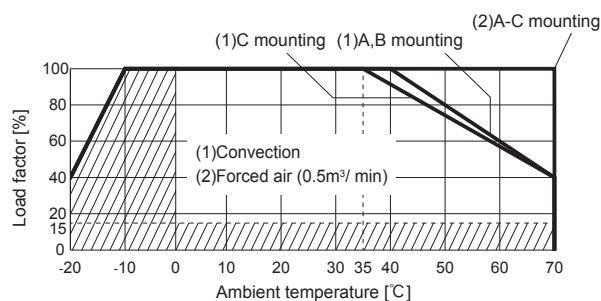


Derating


- PDA50F-12, -15, -24, -36, -48
Ambient temperature derating curve
(Reference value)

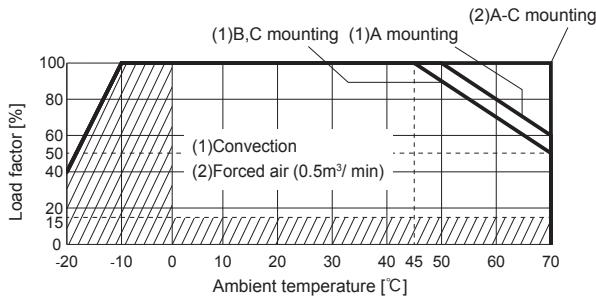


- PDA50F-12-N, -15-N, -24-N, -36-N, -48-N
Ambient temperature derating curve
(Reference value)

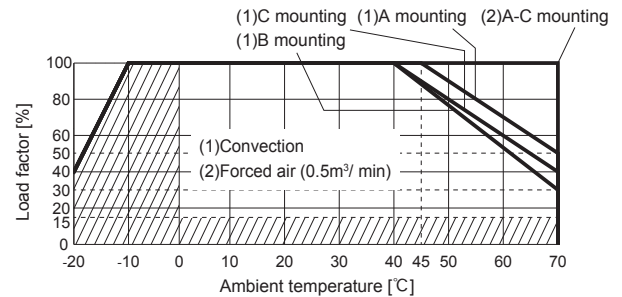


- PDA100F
Ambient temperature derating curve
(Reference value)

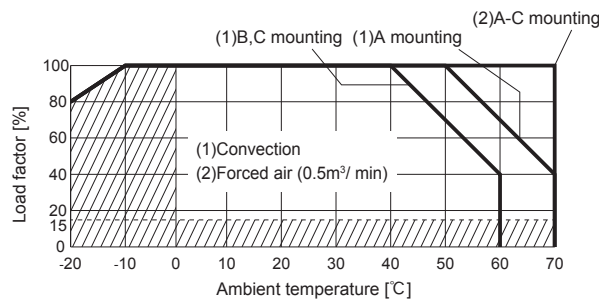


- PDA100F-□-N
Ambient temperature derating curve
(Reference value)

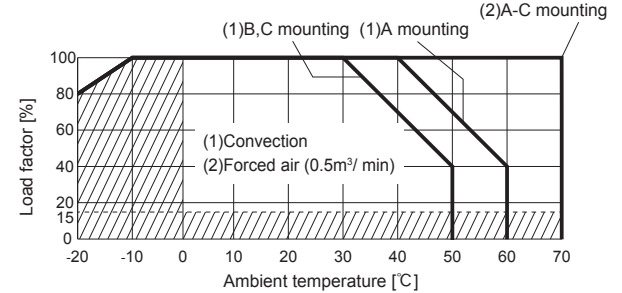


- PDA150F-3R3, -5
Ambient temperature derating curve
(Reference value)

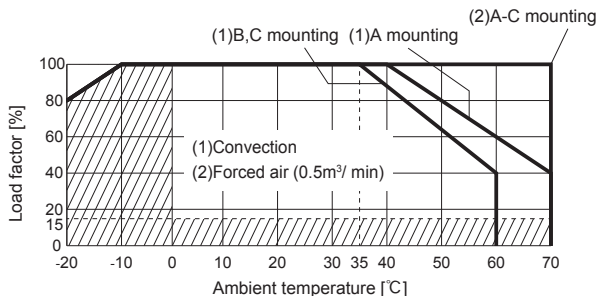


- PDA150F-3R3-N, -5-N
Ambient temperature derating curve
(Reference value)

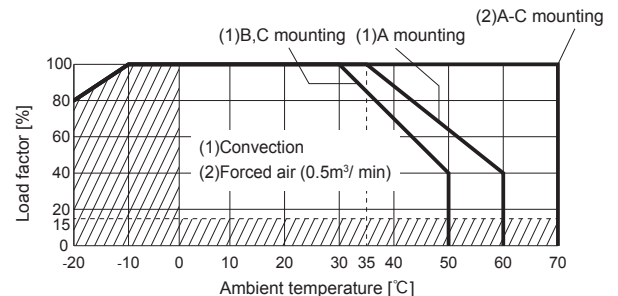

- PDA150F-12, -15, -24, -36, -48
Ambient temperature derating curve
(Reference value)

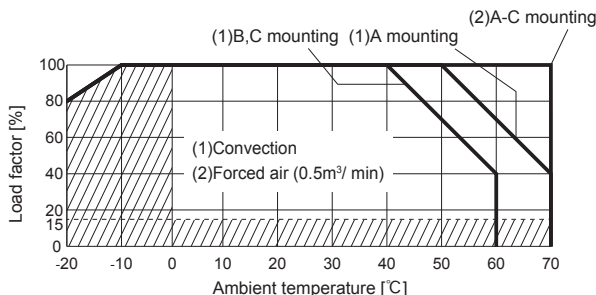


- PDA150F-12-N, -15-N, -24-N, -36-N, -48-N
Ambient temperature derating curve
(Reference value)

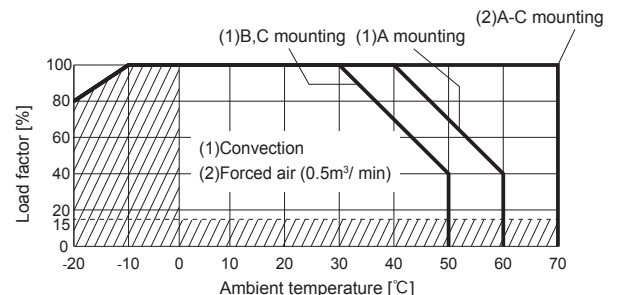

Derating


- The operating ambient temperature is different by with / without chassis cover or mounting position.
- In the hatched area, the specification of Ripple, Ripple Noise is different from other area.
- The ambient temperature should be measured 5 to 10 cm away from the power supply so that it won't be influenced by the heat from the power supply.
- Please make sure the maximum component temperature rise given in Instruction manual 4 is not exceeded.
- Please contact us for more information about operating ambient temperature.

● PDA300F, PDA600F Ambient temperature derating curve (Reference value)

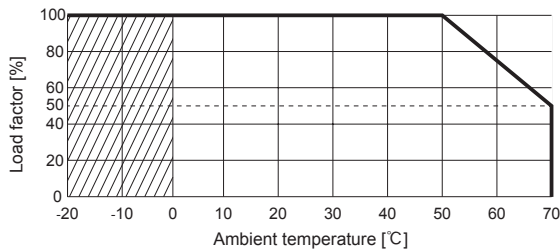


- In the hatched area, the specification of Ripple, Ripple Noise is different from other area.
- Derating curve depending on an ambient temperature (temperature of air sucked in for a cooling purpose) is shown above.

● PDW30F Ambient temperature derating curve (Reference value)

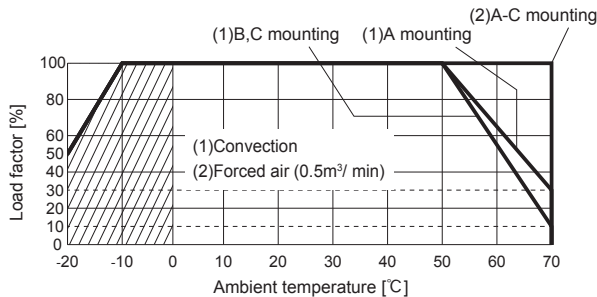

● PDW50F Ambient temperature derating curve (Reference value)

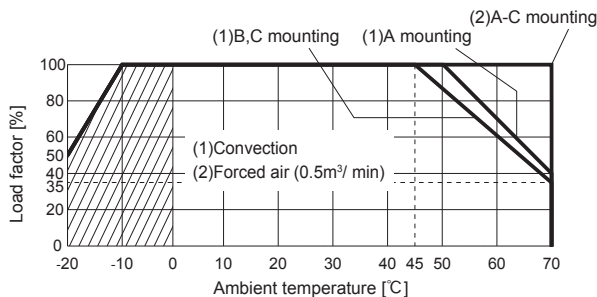

- The operating ambient temperature is different by with / without chassis cover or mounting position.
- In the hatched area, the specification of Ripple, Ripple Noise is different from other area.
- The ambient temperature should be measured 5 to 10 cm away from the power supply so that it won't be influenced by the heat from the power supply.
- Please make sure the maximum component temperature rise given in Instruction manual 4 is not exceeded.
- Please contact us for more information about operating ambient temperature.

Instruction Manuals

◆ Please see catalog and instruction manual before you use.

Basic Characteristics Data

Model	Circuit method	Switching frequency [kHz] *1 *2	Input current *3 [A]	Inrush current protection	PCB/Pattern			Series/Parallel operation availability	
					Material	Single sided	Double	Series operation	Parallel operation
PDA15F	Flyback converter	20 to 125	0.35	Thermistor	CEM-3	Yes	-	Yes	No
PDA30F	Flyback converter	30 to 130	0.62	Thermistor	CEM-3	Yes	-	Yes	No
PDA50F	Flyback converter	25 to 130	1.05	Thermistor	CEM-3	Yes	-	Yes	No
PDA100F	Active filter	20 to 250	1.3	Thermistor	FR-4	-	Yes	Yes	No
	Flyback converter	45 to 110							
PDA150F	Active filter	20 to 250	1.8	Thermistor	FR-4	-	Yes	Yes	No
	Flyback converter	45 to 110							
PDA300F	Active filter	65	4.1	Thermistor	FR-4		Yes	Yes	Yes
	Forward converter	140							
PDA600F	Active filter	65	7.9	SCR	FR-4		Yes	Yes	Yes
	Forward converter	220							
PDW30F	Flyback converter	20 to 125	0.68	Thermistor	CEM-3	Yes	-	Yes	No
PDW50F	Flyback converter	20 to 125	1.15	Thermistor	CEM-3	Yes	-	Yes	No

*1 The value changes depending on input and load. (only for PDA15F-150F, PDW30F and PDW50F)

*2 At light load, burst operation is performed to reduce input power. The switching frequency is changed by using condition. Please contact us for more details. (only for PDA15F-150F, PDW30F and PDW50F)

*3 The value of input current is at ACIN 100V and rated load.