

CXLDA240F Series (Single Phase)

Single Output 240W AC-DC DIN Rail



General description

CXLDA240F Series 240W power supplies feature high reliability and efficiency in a slim DIN Rail enclosure. The power supply has peak power capability, exceptional Electro Magnetic Susceptibility (EMS) and Electro Magnetic Compatibility (EMC) and it fulfills the safety requirements for both IEC61010-2-201 as well as IEC62368-1.

Features

- 85 to 264VAC input voltage range with PFC
- High Efficiency up to 93.5%
- Peak Power capacity to 150% rated power
- -40°C to 70°C wide range operation
- Built-in DC OK relay contact
- Operating altitude up to 5000 meters
- Protections: Short-circuit/
Over-voltage/ Over-current/
Over temperature
- Design to meet SEMI F47
- 5 years warranty
- Made in Vietnam



Applications

- Industrial and Automation
- Security and Surveillance
- Electromechanical Equipment
- Communications and Networking
- Charging and Energy Solutions
- Test and Measurement Equipment

Model Numbering

CXLDA	240	F	-	XX	-	XX
DIN Rail	Output Power 240W => 240	Input F=>Single phase wide input range		Output Voltage 24V => 24 48V => 48		Options T: Screw interface T2: Spring interface T4: Push-In interface

CXLDA240F Series (Single Phase)
Single Output 240W AC-DC DIN Rail



Electrical Specification

MODEL		CXLDA240F-24	CXLDA240F-48
OUTPUT	DC Voltage	24V	48V
	Rated Current	10A	5A
	Rated Power	240W	240W
	Peak Current (Max.) (note#4)	15A	7.5A
	Peak Power (note#4)	360W (3 sec.)	360W (3 sec.)
	Output adj. range (note#4)	24 - 28V	48 - 55V
	Line Regulation	±0.5%	±0.5%
	Load Regulation	±1%	±1%
	Startup Time; Rise Time (Max.)	1000ms; 50ms	
	Hold-up Time (Typ.)	20ms at 115Vac, Full Load	
	Ripple & Noise (Max.) (at full load) (note#1)	100mVp-p	120mVp-p
	INPUT	Nominal Input Voltage Range	100 to 240Vac, 140 to 340Vdc (note#2)
Input Voltage Range		85 to 264Vac, 127 to 375Vdc (note#2)	
Input Frequency		47 to 63Hz	
Input Current (Typ.)		2.5A at 115Vac, 1.3A at 230Vac	
Inrush Current (Typ.)		40A at 230Vac (Cold Start)	
Power Factor (Min.)		0.9	
Efficiency (Typ.)		93%	93.5%
Leakage Current (Max.)		0.75mA at 240Vac/60Hz	
No Load Power Consumption (Max.)		1.5W	
FUNCTION	DC OK	Relay output (ON: shorted, OFF: Opened) 30Vdc/1A, 30Vac/0.5A	
PROTECTION	Over Voltage Protection	< 35V, auto-recovery	< 63V, auto-recovery
	Over Current Protection	150% to 185% of Rated Current, Hiccup mode, Auto-recovery mode	
	Short Current Protection	No damage, auto-recovery mode protection until fault is removed	
	Over Temperature Protection	No damage, auto-recovery mode protection until fault is removed	
ENVIRONMENT	Working Temperature	-40 to +70°C (Refer to "De-rating Curve")	
	Working Humidity	20% to 95% RH non-condensing	
	Storage Temperature/ Humidity	-40 to +85°C, 5 to 95% RH non-condensing	
	Vibration	10 to 500Hz, 2G, 10minutes non-operating	
	Operating Altitude (Max.) (note#3)	5000m	
	Shock	20G	
MECHANICAL	Input wire	AWG 18-10	
	Output wire	AWG 12-10	
	DC OK wire	AWG 22-18	
	Terminal	Screw/Spring/Push-In	

CXLDA240F Series (Single Phase)
Single Output 240W AC-DC DIN Rail



EMC & SAFETY	EMI	Conducted Emission	EN/BS EN 55032 (CISPR32), FCC: Class B
		Radiated Emission	EN/BS EN 55032 (CISPR32), FCC: Class B
		Harmonic Current	IEC61000-3-2, Class A
		Voltage Flicker	IEC61000-3-3
	EMS	ESD	IEC61000-4-2, Criteria A
		Radiated Immunity	IEC61000-4-3, Criteria A
		EFT/Burst	IEC61000-4-4, Criteria A
		Surge	IEC61000-4-5, Criteria A
		Conducted Immunity	IEC61000-4-6, Criteria A
		Magnetic Field Immunity	IEC61000-4-8, Criteria A
		Voltage Dips, interruption	IEC61000-4-11, Criteria A SEMI F47, Criteria A
	Safety Standard		
	UL61010-1/61010-2-201, EN61010-1/61010-2-201 (Planned), UL62368-1, EN62368-1 (Planned)		
	Isolation Voltage		I/P-O/P: 3000VAC; I/P-PE: 2000VAC; O/P-PE: 500VAC; O/P-DC OK: 500VAC
	Isolation Resistance (Min.)		I/P-O/P: 100MΩ; I/P-PE: 20MΩ; O/P-PE: 100MΩ, at 500VDC, 70%RH
ENVIRONMENTAL COMPLIANCE	RoHS Compliance	2011/65/EU	
OTHERS	Warranty (Min.)	5 years	
	MTBF (Min.)	1250K hours	
	Dimension	48mm*124mm*117mm	
	Weight (Max.)	760g	

Notes

All specifications are defined at 230Vac/50Hz, rated power, and 25°C ambient unless otherwise specified.

#1: Ripple and noise are measured with a 0.1 μF ceramic capacitor and a 47 μF electrolytic capacitor connected in parallel, using a 20 MHz bandwidth. Ripple and noise may be higher at light load than at full load.

#2: The safety approval is for only AC input, and the internal fuse is only applicable to AC input. A DC-rated fuse shall be connected to the input when the unit is operated with a DC input. The input has non-polarity for DC input.

#3: When operating altitude is higher than 2000m (6500 feet), the environment temperature de-rating factor is 0.36°C /100m.


#4: The safety approval is different. Please contact us for details.

CXLDA240F Series (Single Phase)

Single Output 240W AC-DC DIN Rail




Peak Load

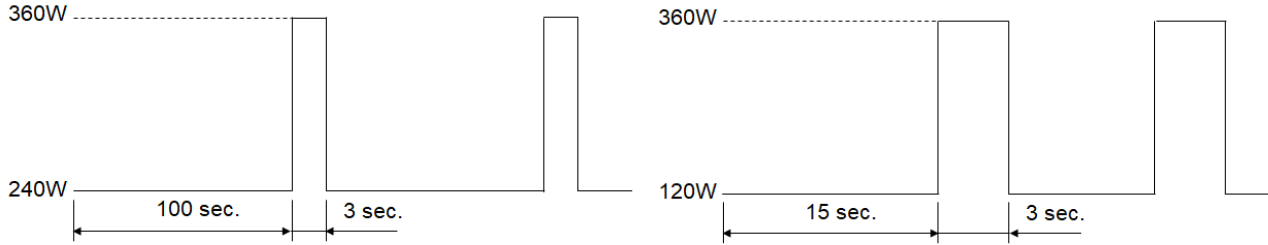


De-rating Curve

Output Power VS Ambient Temperature

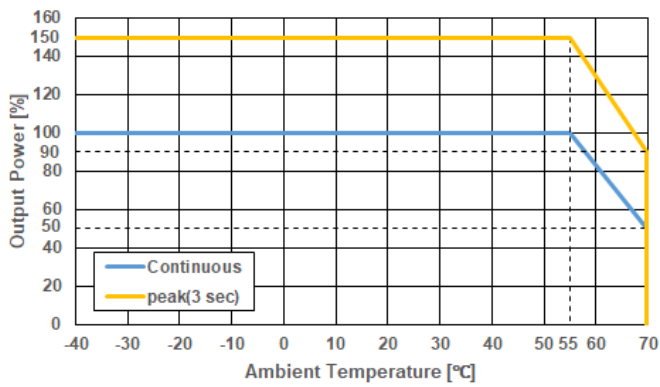

Output Power VS Input Voltage

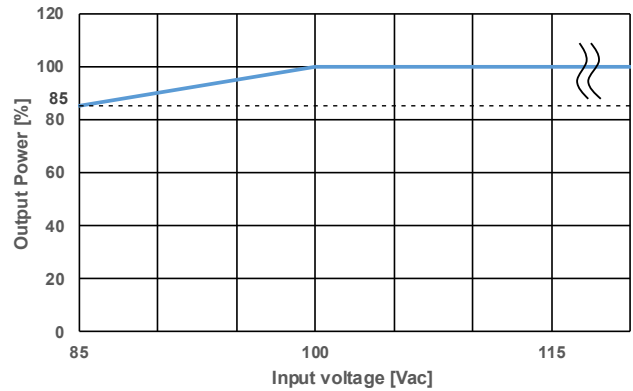

*The safety approval is different. Please contact us for details.

At -40°C, the unit may require additional time to start under full load. To avoid this delay, start the unit under no-load conditions and begin drawing load current after 5 seconds. Alternatively, the unit can be started under full load at temperatures above -25°C.


CXLDA240F Series (Single Phase)

Single Output 240W AC-DC DIN Rail



Mechanical and Connector Information


Screw Type (Model Numbering: T): Unit: mm

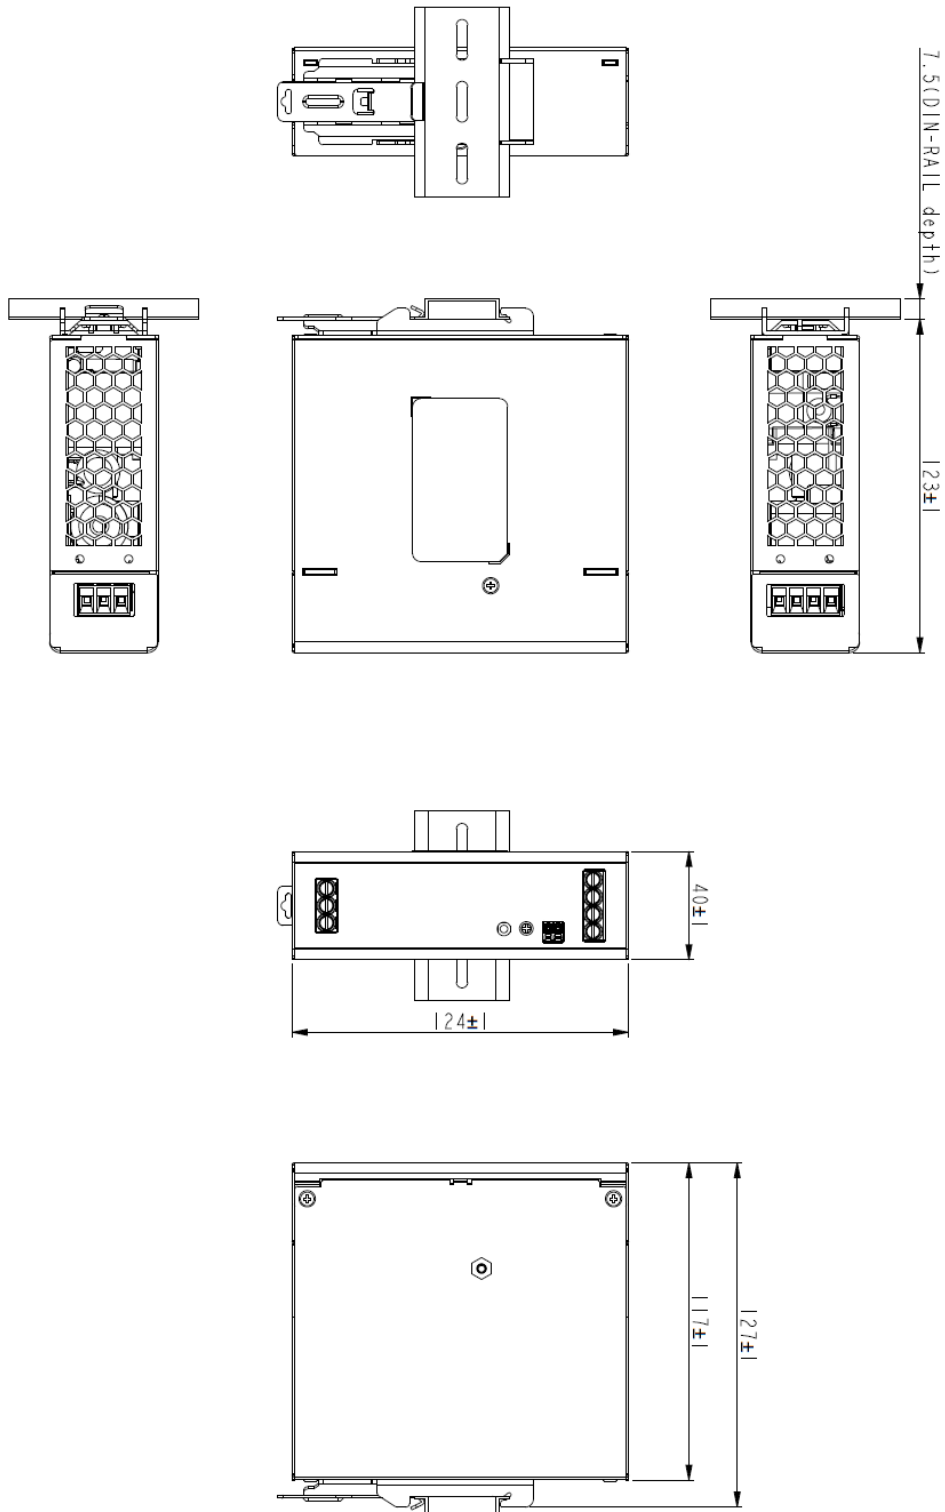

CXLDA240F Series (Single Phase)
Single Output 240W AC-DC DIN Rail



Spring Type (Model Numbering: T2): Unit: mm



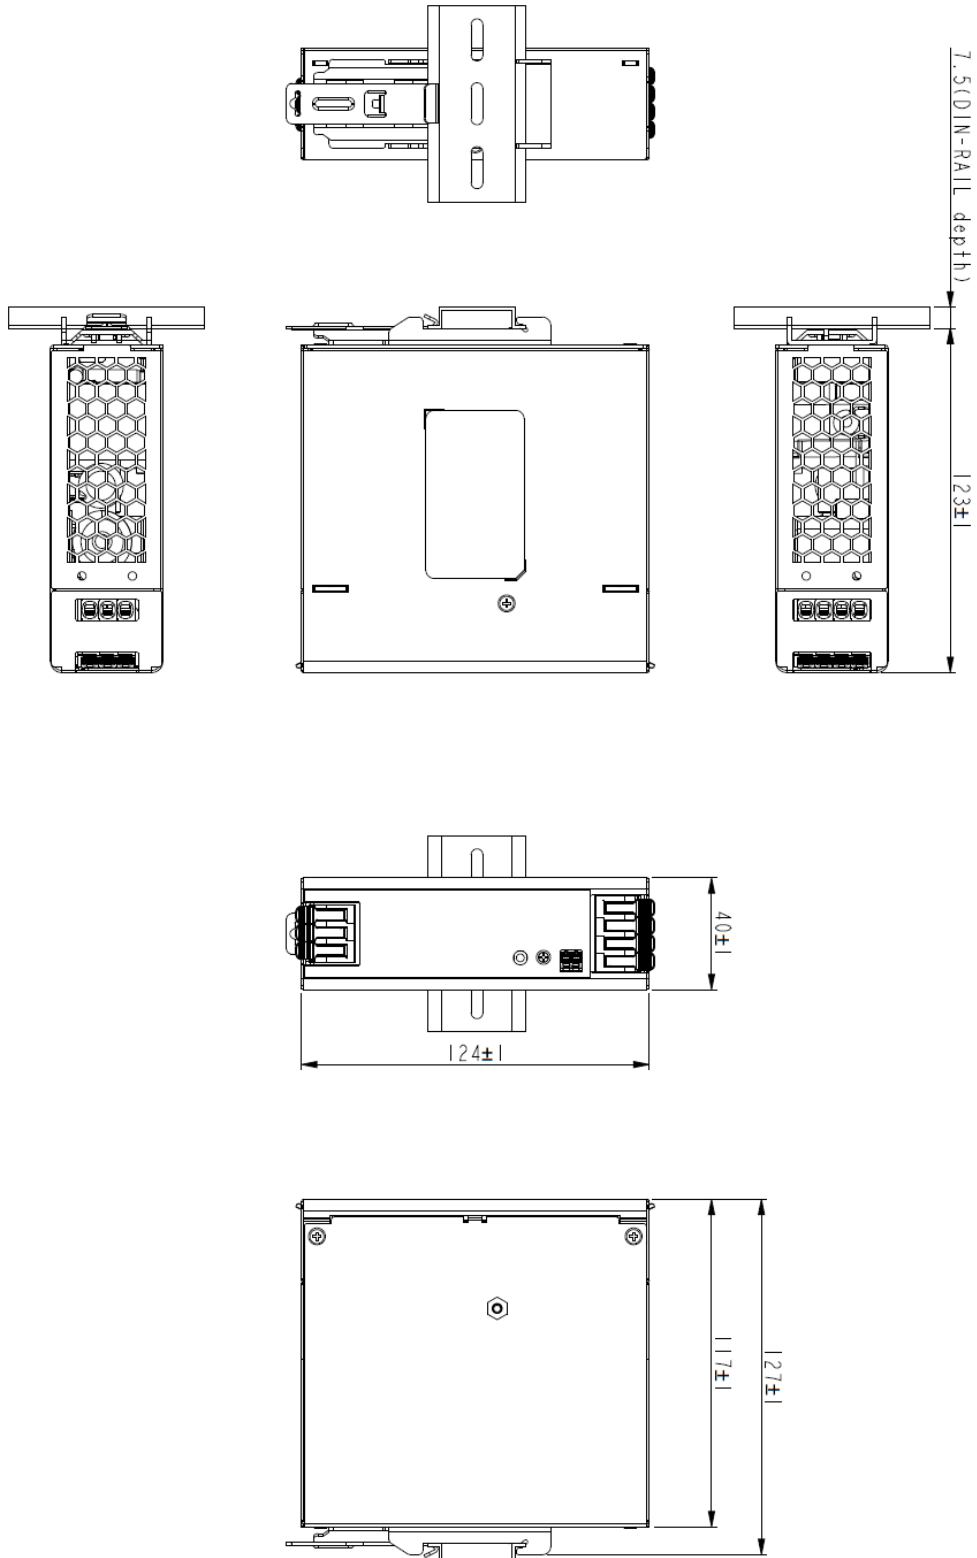


CXLDA240F Series (Single Phase)

Single Output 240W AC-DC DIN Rail




Push In Type (Model Numbering: T4): Unit: mm

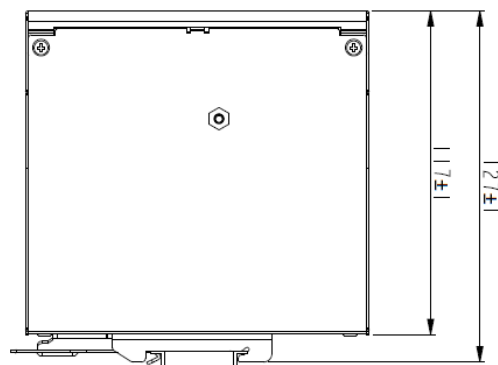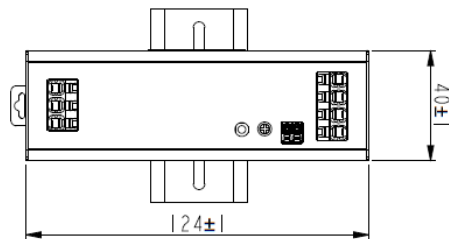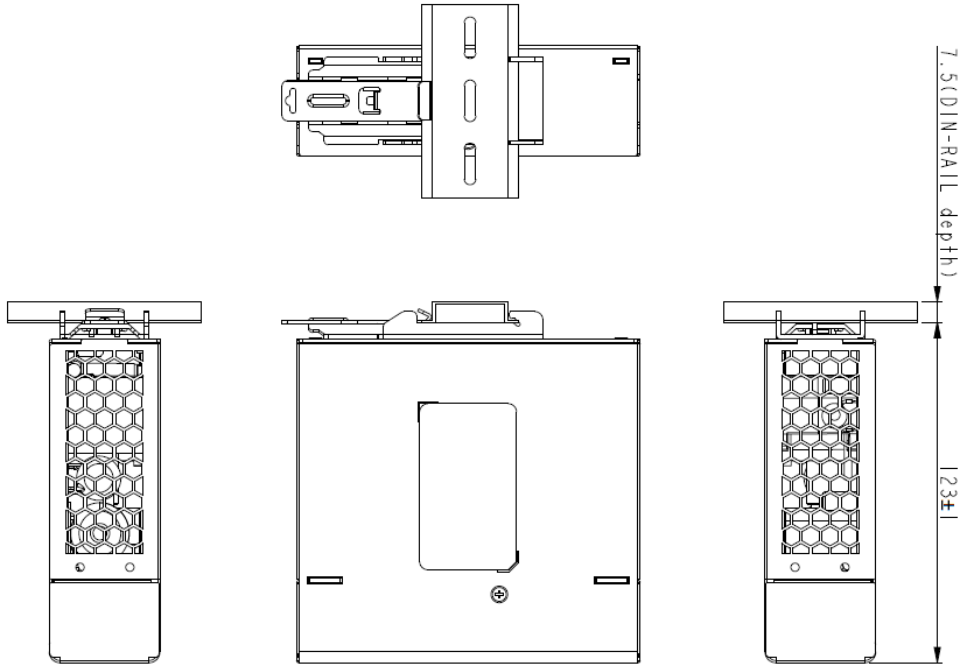

CXLDA240F Series (Single Phase)


Single Output 240W AC-DC DIN Rail

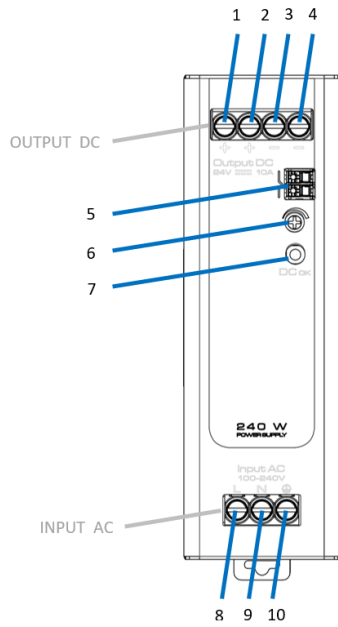

Terminal Number	Terminal Name	Function
1	+VOUT	+Output terminal
2	+VOUT	+Output terminal
3	-VOUT	-Output terminal
4	-VOUT	-Output terminal
5	DC OK relay	DC OK relay contact Rating : 30 Vdc, 1 A (Resistive load)
6	TRM	Adjustment of output voltage
7	DC OK LED	DC OK Power on light
8	AC(L)	Input terminal
9	AC(N)	
10	PE	Protective earth terminal


Mounting information

Vertical Mounting

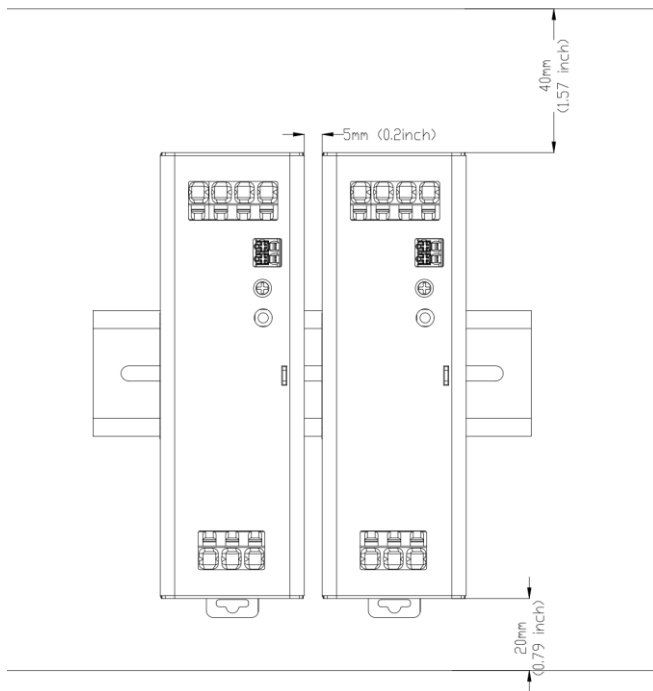

Applicable DIN rail

Admissible DIN-rail: TS35/7.5 or TS35/15

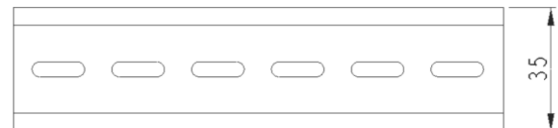

CXLDA240F Series (Single Phase)

Single Output 240W AC-DC DIN Rail



Terminal Connector

Screw Type (Model Numbering: T):

Number of positions: 3P (Input)/4P (Output)



Pitch: 6.35mm

Rated Voltage: 600V

Rated Current: 30A

Connection type: Screw Connection

Flammability: UL94 V0

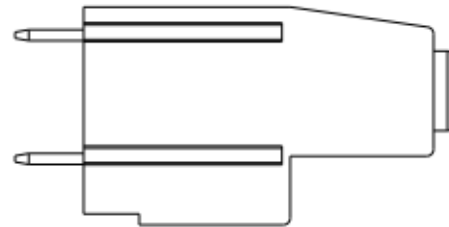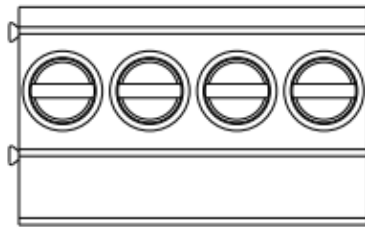

Spring Type (Model Numbering: T2):

Number of positions: 3P (Input)/4P (Output)



Pitch: 6.35mm

Rated Voltage: 600V

Rated Current: 30A

Connection type: Spring Connection

Flammability: UL94 V0

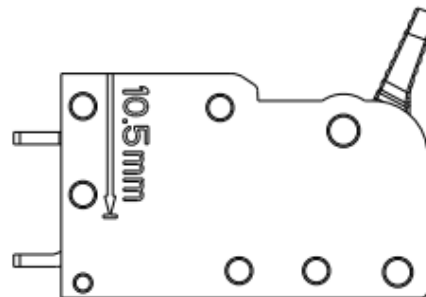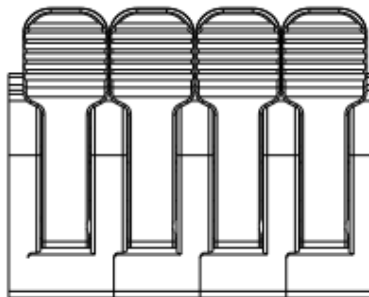

CXLDA240F Series (Single Phase)

Single Output 240W AC-DC DIN Rail



Push In Type (Model Numbering: T4):

Number of positions: 3P (Input)/4P (Output)

Pitch: 6.35mm

Rated Voltage: 600V

Rated Current: 30A

Connection type: Push in Connection

Flammability: UL94 V0

