



Test Report: CXLPA150F-48

150W AC-DC Enclosed

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

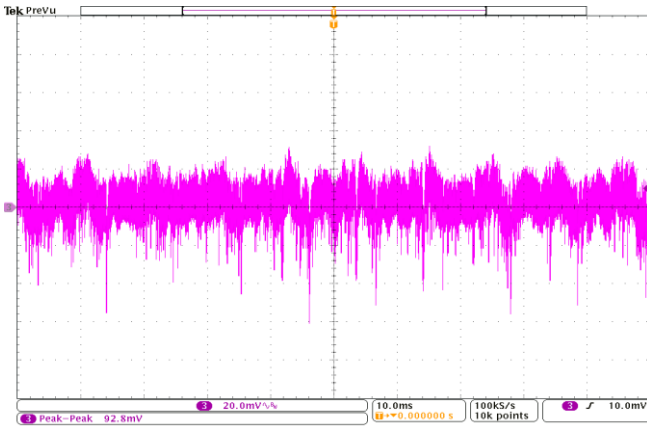
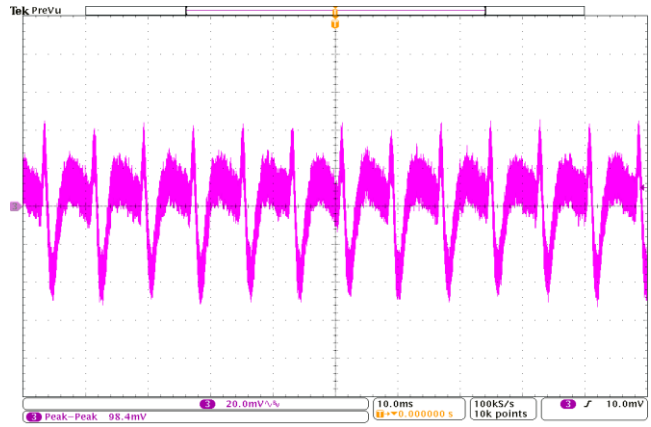
E.M.C. Test

■ RELIABILITY TEST

Environment Test

DESIGN VERIFY TEST

OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	
1	OUTPUT VOLTAGE TOLERANCE.	No specification	I/P: 85VAC ~ 305VAC O/P: NO ~ FULL LOAD Ta: -30°C, 25°C, 50°C	47.84 ~ 48.15V	
2	LINE REGULATION	-0.5%~+0.5%	I/P: 85VAC ~ 305VAC O/P: NO ~ FULL LOAD Ta: -30°C, 25°C, 50°C	85 to 115VAC	-0.01% ~ +0.01%
				230 to 305VAC	-0.01% ~ +0.01%
3	LOAD REGULATION	-1%~+1%	I/P: 85VAC I/P: 305VAC O/P: NO ~ FULL LOAD Ta: 25°C	-0.05% ~ +0.05%	
4	RIPPLE & NOISE	250mVp-p	I/P: 85VAC I/P: 305VAC O/P: FULL LOAD Ta: 25°C	85VAC	92.8mVp-p
				305VAC	98.4mVp-p
	85VAC/ FULL LOAD		305VAC/ FULL LOAD		
	25°C 92.8mV 		25°C 98.4mV 		

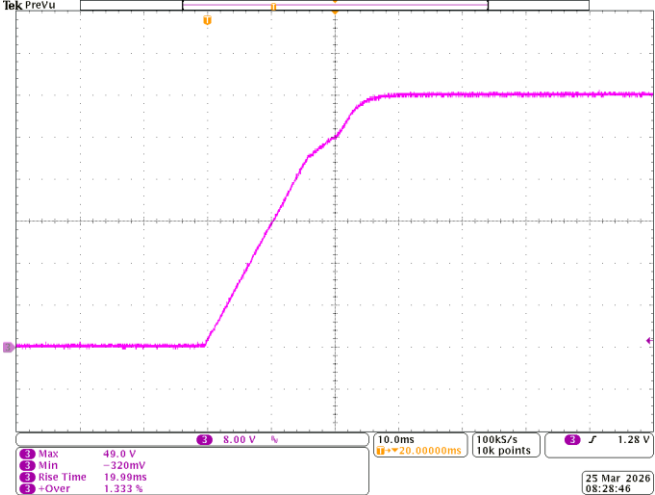
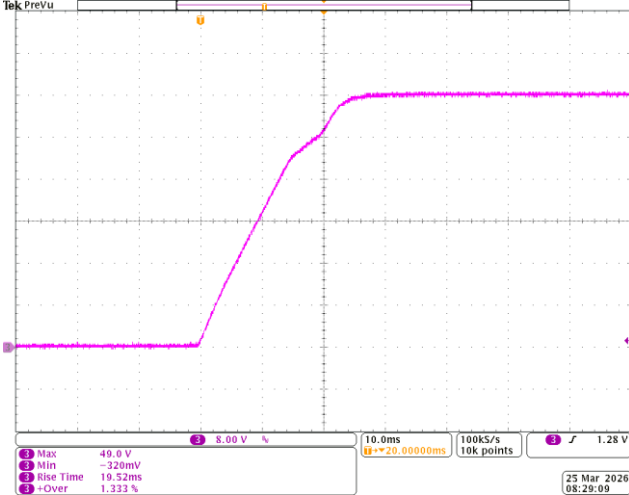
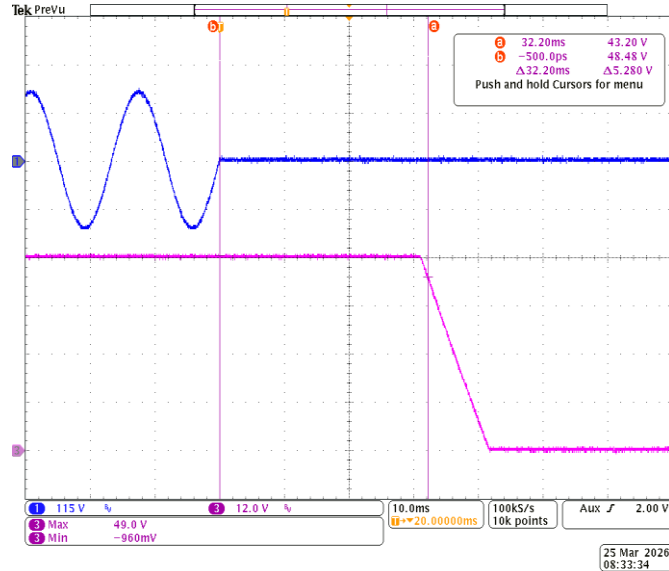
150 W AC-DC Enclosed

CXLPA150F-48

5	START UP TIME		1000ms	I/P: 85VAC I/P: 305VAC O/P: FULL LOAD Ta: -30°C, 25°C, 50°C	85VAC 305VAC	436.8ms 482.3ms
	INPUT=85VAC/47HZ @ FULL LOAD			INPUT=305V/63HZ @ FULL LOAD		
	-30°C: 348.5ms CH1: AC Input Voltage, CH3: Output Voltage			-30°C: 309.6ms CH1: AC Input Voltage, CH3: Output Voltage		
	25°C: 394.4ms CH1: AC Input Voltage, CH3: Output Voltage			25°C: 385.2ms CH1: AC Input Voltage, CH3: Output Voltage		
	50°C: 436.8ms CH1: AC Input Voltage, CH3: Output Voltage			50°C: 482.3ms CH1: AC Input Voltage, CH3: Output Voltage		

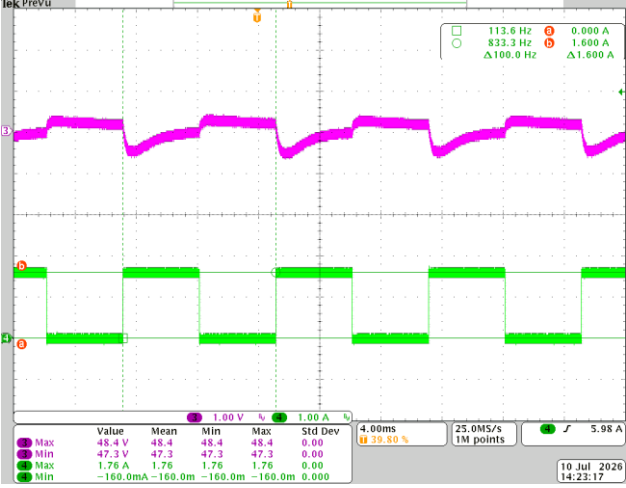
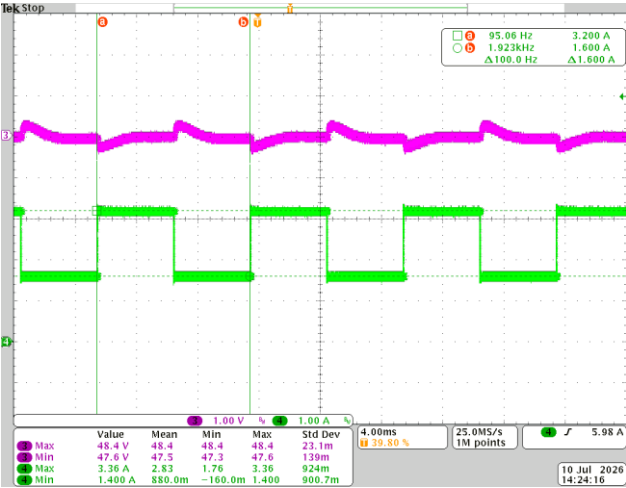
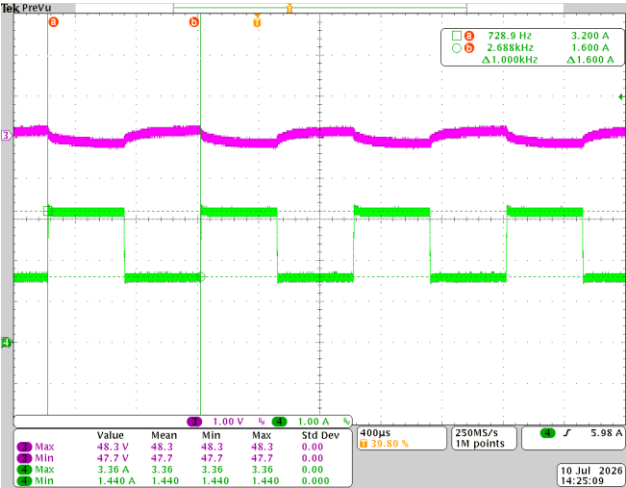
150 W AC-DC Enclosed

CXLPA150F-48

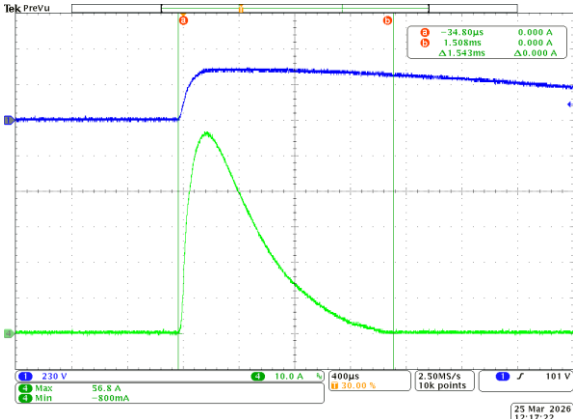
	RISE TIME	50ms	I/P: 85VAC I/P: 305VAC O/P: FULL LOAD Ta: 25°C	85VAC	19.99ms
				305VAC	19.52ms
6	INPUT=85VAC/47HZ @ FULL LOAD		INPUT=305V/63HZ @ FULL LOAD		
	25°C: 19.99ms 		25°C: 19.52ms 		
7	HOLD UP TIME	> 20ms / 115VAC	I/P: 115VAC O/P: FULL LOAD Ta: 25°C	32.20ms	
			INPUT=115VAC/60HZ @ FULL LOAD		
	25°C CH1: AC Input Voltage, CH3: Output Voltage 				

150 W AC-DC Enclosed

CXLPA150F-48

DYNAMIC LOAD		No specification	I/P: 85VAC O/P: (1) LOAD 0%~50% 50%DUTY / 100HZ (2) LOAD 50%~100% 50%DUTY / 100HZ (3) LOAD 0%~50% 50%DUTY / 1KHZ (4) LOAD 50%~100% 50%DUTY / 1KHZ Ta: 25°C	-
(1) INPUT=85VAC/47HZ @ LOAD 0%~50% 50%DUTY / 100HZ		(3) INPUT=85VAC/47HZ @ LOAD 0%~50% 50%DUTY / 1KHZ		
25°C CH3: Output Voltage, CH4: Output Current 		25°C CH3: Output Voltage, CH4: Output Current 		
(2) INPUT=85VAC/47HZ @ LOAD 50%~100% 50%DUTY / 100HZ		(4) INPUT=85VAC/47HZ @ LOAD 50%~100% 50%DUTY / 1KHZ		
25°C CH3: Output Voltage, CH4: Output Current 		25°C CH3: Output Voltage, CH4: Output Current 		

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT CURRENT	1.6A/115VAC 0.8A/230VAC	I/P: 115VAC I/P: 230VAC O/P: FULL LOAD Ta: 25°C	1.481A @115VAC 0.720A @230VAC
2	LEAKAGE CURRENT	< 2mA / 240VAC	I/P: 240VAC O/P: FULL LOAD Ta: 25°C	L-FG: 0.156mA N-FG: 0.159mA
3	STANDBY POWER	No specification	I/P: 115VAC I/P: 230VAC O/P: NO LOAD Ta: 25°C	115VAC/0.46W 230VAC/0.47W
4	INRUSH CURRENT	60A at 230Vac (cold start)	I/P: 230VAC O/P: FULL LOAD Ta: 25°C	56.8A
	INPUT=230VAC/50HZ @ FULL LOAD CH1: AC Input Voltage, CH4: Input Current			
5	EFFICIENCY	92.5% / FULL LOAD at 230VAC	I/P: 115VAC I/P: 230VAC O/P: FULL LOAD Ta: 25°C	115VAC/91.01% 230VAC/93.64%
6	POWER FACTOR	> 0.9	I/P: 115VAC I/P: 230VAC O/P: FULL LOAD Ta: 25°C	115VAC/0.997 230VAC/0.996



150 W AC-DC Enclosed

CXLP A150F-48

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER CURRENT PROTECTION	105%~135% rated current 3.36A<OCP<4.32A	I/P: 85VAC I/P: 305VAC O/P: TESTING Ta: 25°C	85VAC/3.66A 305VAC/3.66A
2	OVER VOLTAGE PROTECTION	120% to 150% of Rated Voltage	I/P: 85VAC I/P: 305VAC O/P: NO LOAD Ta: 25°C	85VAC/62.2V 305VAC/62.2V
3	SHORT CIRCUIT PROTECTION	NO DAMAGE (auto-recovery)	I/P: 85VAC ~ 305VAC O/P: NO LOAD, FULL LOAD Ta: 25°C	PASS
4	OVER TEMPERATURE PROTECTION	NO DAMAGE (auto-recovery)	I/P: 85VAC ~ 305VAC O/P: FULL LOAD	O.T.P. Active at 65.3°C Shut down o/p voltage recovers automatically after temperature goes down

150 W AC-DC Enclosed

CXLPA150F-48

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Power Transistor	Q050 Rated 11.5A/600V	O/P: (1) Peak voltage at I/P: 305VAC (2) Peak current at I/P: 85VAC	(1) 437.5V (2) 0.7944A
2	PFC Power Transistor	Q010 Rated 18A/600V	O/P: (1) Peak voltage at I/P: 305VAC (2) Peak current at I/P: 85VAC	(1) 436.2V (2) 2.226A
3	Input Capacitor	C052 Rated 120uF/450V	O/P: (1) Peak voltage at I/P: 305VAC (2) Peak current at I/P: 85VAC	(1) 424.8V (2) 1.391A

150 W AC-DC Enclosed

CXLPA150F-48**SAFETY TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 4.0KVAC/min I/P-FG: 2.0KVAC/min O/P-FG: 0.5KVAC/min	I/P-O/P: 4.0KVAC/min I/P-FG: 2.0KVAC/min O/P-FG: 0.5KVAC/min Ta: 25°C	PASS
2	ISOLATION RESISTANCE	I/P-O/P: 500VDC: >100MΩ I/P-FG: 500VDC: >100MΩ O/P-FG: 500VDC: >100MΩ	I/P-O/P: 500VDC I/P-FG: 500VDC O/P-FG: 500VDC Ta: 25°C	PASS

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS A	I/P: 115VAC I/P: 230VAC O/P: FULL LOAD Ta: 25°C	PASS
2	RADIATION	EN55032 CLASS B	I/P: 115VAC I/P: 230VAC O/P: FULL LOAD Ta: 25°C	PASS
3	CONDUCTION	EN55032 CLASS B	I/P: 115VAC I/P: 230VAC O/P: FULL LOAD Ta: 25°C	PASS
4	E. S. D	EN61000-4-2 Air: ±8KV, Contact: ±4KV CRITERIA A	I/P: 230VAC O/P: FULL LOAD Ta: 25°C	PASS
5	E. F. T	EN61000-4-4 INPUT: ±2KV CRITERIA A	I/P: 230VAC O/P: FULL LOAD Ta: 25°C	PASS
6	SURGE	EN61000-4-5 L-N: ±1KV L, N-PE: ±2KV CRITERIA A	I/P: 230VAC O/P: FULL LOAD Ta: 25°C	PASS
7	VOLTAGE DIPS	IEC61000-4-11 (1) < 5 % residual voltage, 0.5 cycle CRITERIA A (2) 70% residual voltage, 25 cycles (at 50Hz) CRITERIA A (3) < 5 % residual voltage, 250 cycles (at 50 Hz) CRITERIA B	I/P: 230VAC O/P: FULL LOAD Ta: 25°C	PASS

150 W AC-DC Enclosed

CXLPA150F-48

8	Conducted Immunity	IEC61000-4-6 0.15-10 MHz, 3V, 80% AM (1kHz), 10-30 MHz, 3V-1V, 80% AM (1kHz), 30-80 MHz, 1V, 80% AM (1kHz), CRITERIA A	I/P: 230VAC O/P: FULL LOAD Ta: 25°C	PASS
9	Radiated Immunity	IEC61000-4-3 (1) 80 to 1000(MHz), 3 V/m, 80 % AM (1 kHz) (2) 1800, 2600, 3500, 5000 MHz (± 1 %), 3V/m, 80% AM (1kHz) CRITERIA A	I/P: 230VAC O/P: FULL LOAD Ta: 25°C	PASS
10	Power Frequency Magnetic Field	IEC61000-4-8 1A/m, 50Hz CRITERIA A	I/P: 230VAC O/P: FULL LOAD Ta: 25°C	PASS

■ RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	TEMPERATURE	No components damaged	I/P: 85VAC @ 47Hz O/P: FULL LOAD Ta: 50°C	PASS*Table 1
2	CAPACITOR LIFE CYCLE	The electrolytical capacitor life is greater than 43,800 hours	I/P: 230 VAC @ 50Hz O/P: FULL LOAD Ta: 50°C	LIFETIME= 47,179 hours
3	MTBF	The power supply reliability, when calculated by SR332 exceeds 2,500,000 hours with all output at 100% of maximum load and at ambient temperature of 25°C		4,453,352 hours @ 115VAC 7,353,923 hours @ 230VAC
4	HUMIDITY	Storage: 25°C / 10 ~ 95% RH Working: 25°C/ 20 ~ 90% RH I/P: 100~277VAC (Working) O/P: 100% load (Working)		PASS
5	VIBRATION TEST	Ware form: Random Acceleration: 2Grms Axis/Time: X, Y, Z / 10min per axis Frequency: 10~500Hz No functional, mechanical and safety fail.		PASS
6	ALTITUDE	Operational and Non-operational Altitude: 5000 meters Temperature: -5°C Dwell time: 24Hrs I/P: 100~277VAC (Operational) O/P: 100% load (Operational)		PASS
7	OVERLOAD BURN-IN TEST	I/P: 115VAC/ 60Hz O/P: Just before OCP kicks in Ta: 50°C		PASS

*1 All component temperatures should not exceed maximum operation temperature.

150 W AC-DC Enclosed

CXLP A150F-48

Table 1. Components temperature @ 50°C 100% Load. (Unit °C)

No.	Location	85VAC	Result
1	Q010	105.3	Pass
2	L010	108.0	Pass
3	L003	94.7	Pass
4	D050	92.4	Pass
5	L002	104.7	Pass
6	L001	87.9	Pass
7	T050W	100.2	Pass
8	T050C	97.6	Pass
9	C200	77.8	Pass
10	C052	81.1	Pass
11	Q050	82.8	Pass
12	D010	95.1	Pass
13	D210	90.9	Pass
14	IC100	77.8	Pass

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	Louis Yen	Geoffrey Wu	Jimmy LW Lin