





DATA SHEET		Date	21-May-26
Model	FDA150F-24	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45 %RH
		Tested by	R.Nakanishi

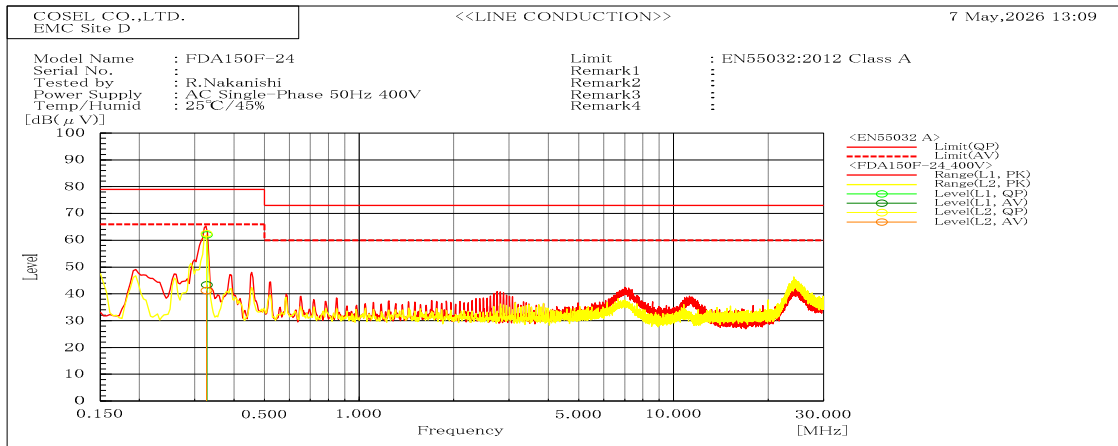

Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.327	L1	62.1	43.4	79	66	16.9	22.6	Pass	
0.327	L2	62.5	41.3	79	66	16.5	24.7	Pass	

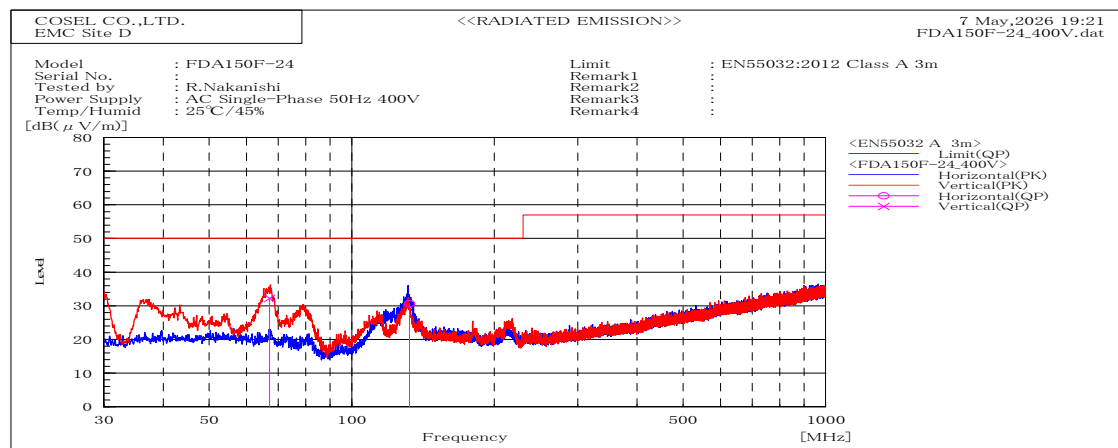


Frequency MHz	Polarization	Stability	Level dB(μV/m)	Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
132.395	H	Stable	30.7	50	19.3	Pass	200	356.8	
67.108	V	Stable	32.2	50	17.8	Pass	100.2	8.6	




DATA SHEET		Date	21-May-26
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI	Humid.	45 %RH
	Line conduction & Radiated emission	Tested by	R.Nakanishi

1. Line conduction

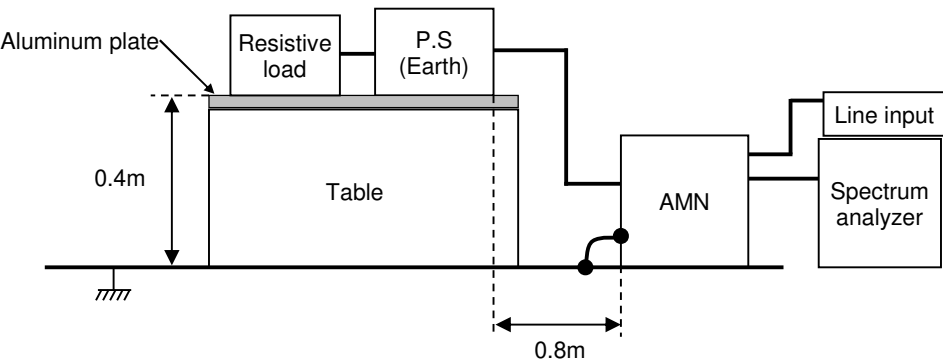

2. Radiated emission

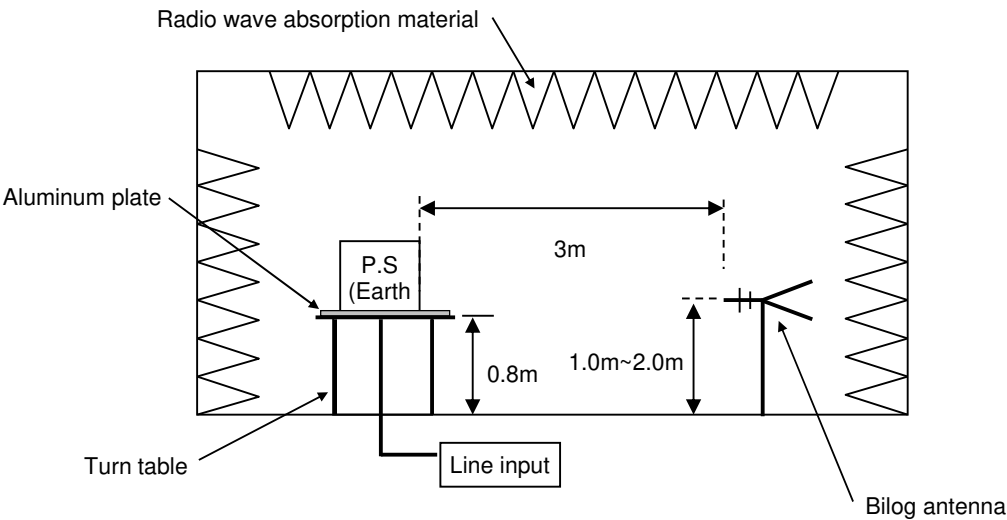




Conditions

Test : EMI
Model Name: FDA150F-24

○Photographs of Test Set-Up

1.LINE CONDUCTION

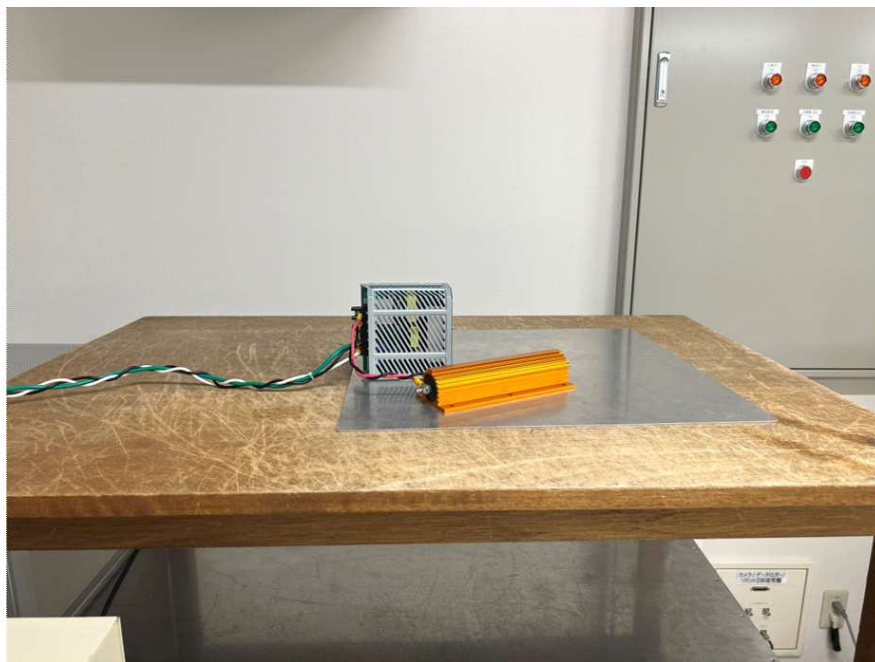

2.RADIATED EMISSION

