





DATA SHEET		Date	21-May-26
Model	FDA200F-24	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45 %RH
		Tested by	R.Nakanishi

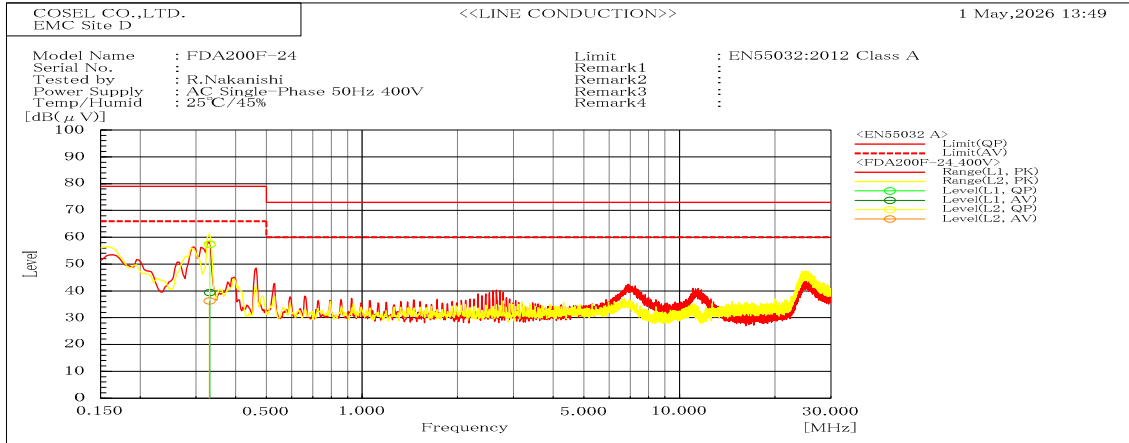

Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.331	L1	57.4	39.4	79	66	21.6	26.6	Pass	
0.331	L2	57.5	36.2	79	66	21.5	29.8	Pass	

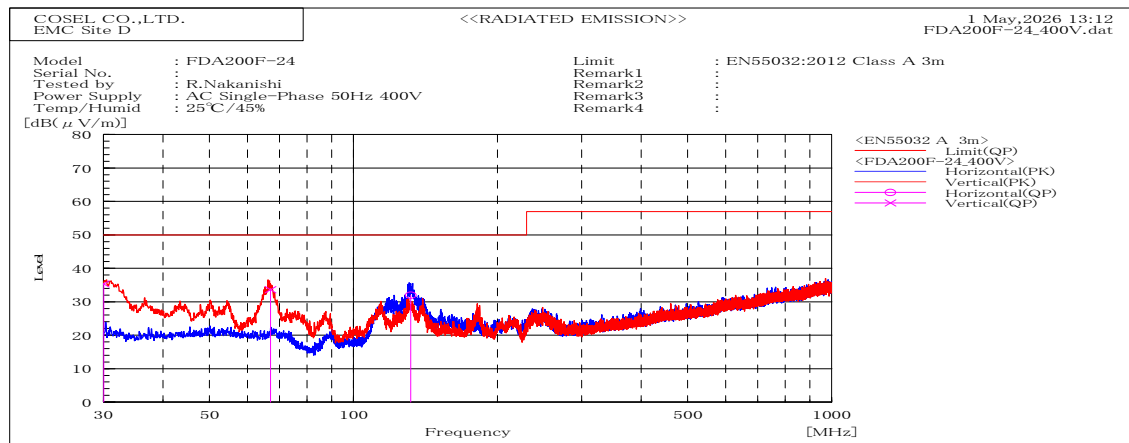


Frequency	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height	Angle	Remark
MHz			dB(μV/m)	dB(μV/m)	dB				
			QP	QP	QP		cm	deg	
30.041	V	Stable	35.3	50	14.7	Pass	100	355.3	
67.072	V	Stable	33.6	50	16.4	Pass	100.2	52.9	
131.743	H	Stable	32	50	18	Pass	199.7	354.6	




DATA SHEET		Date	21-May-26
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI	Humid.	45 %RH
	Line conduction & Radiated emission	Tested by	R.Nakanishi

1. Line conduction

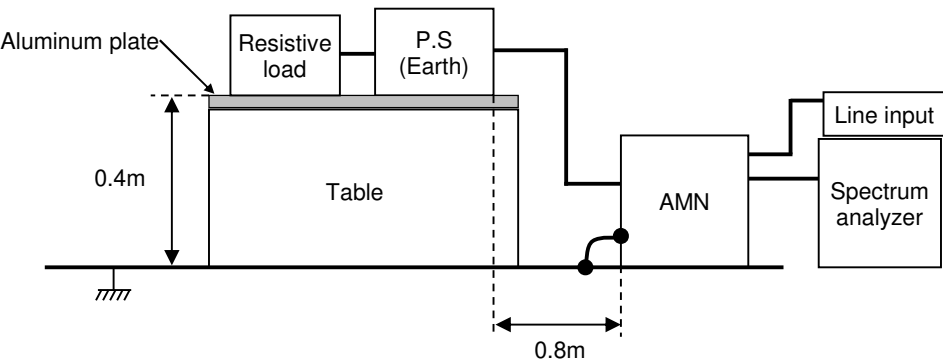

2. Radiated emission

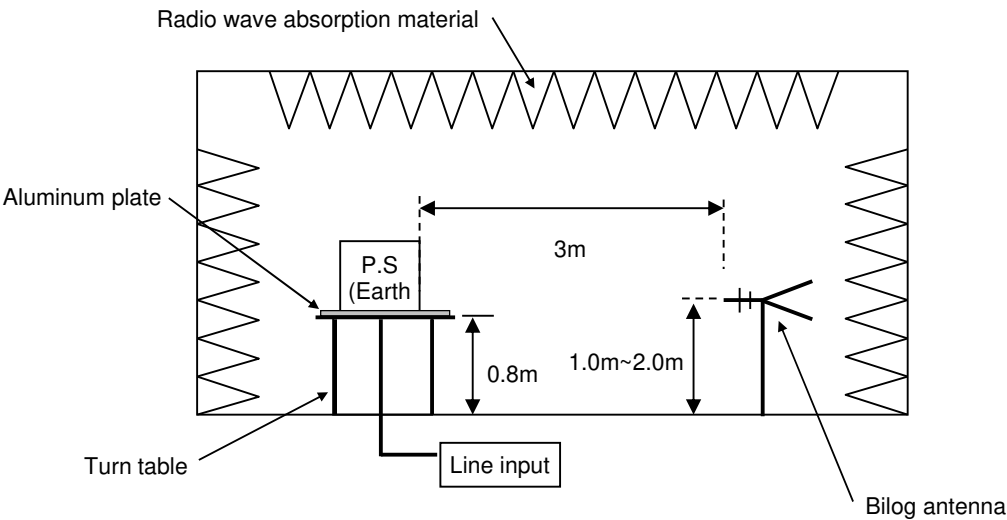




Conditions

Test : EMI
Model Name: FDA200F-24

○Photographs of Test Set-Up

1.LINE CONDUCTION

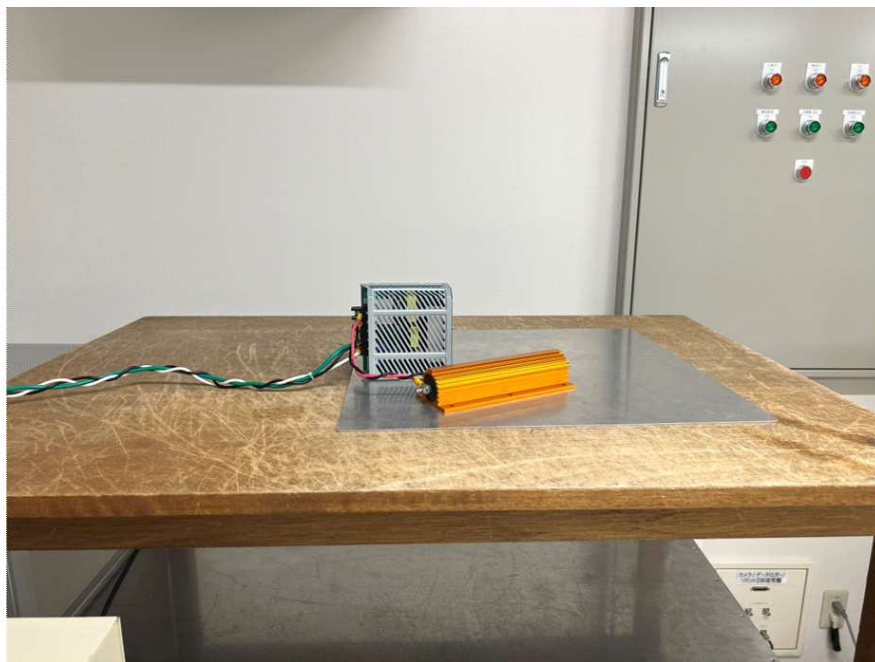

2.RADIATED EMISSION

