





DATA SHEET			Date	21-May-26
Model	FDA75F-24		Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission		Humid.	45 %RH
			Tested by	R.Nakanishi

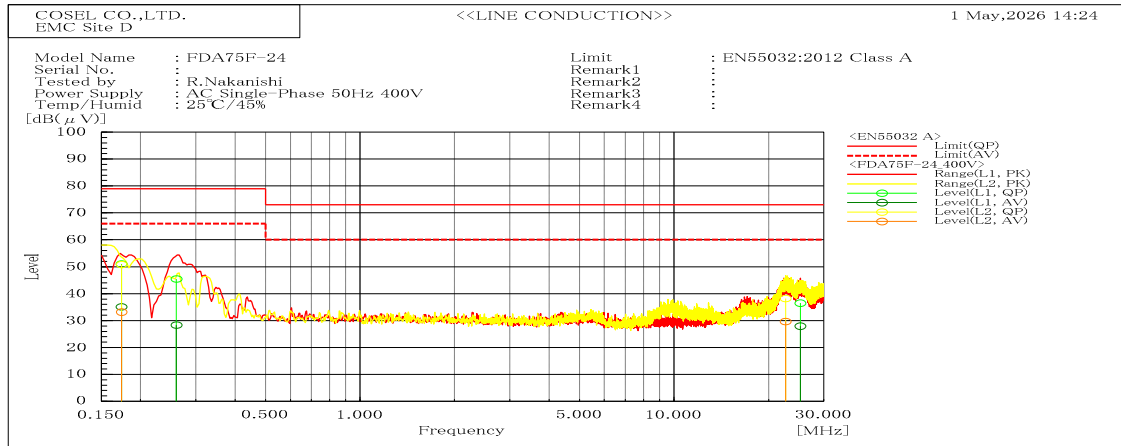

Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.174	L1	51	35.1	79	66	28	30.9	Pass	
0.26	L1	45.5	28.3	79	66	33.5	37.7	Pass	
25.243	L1	36.4	27.9	73	60	36.6	32.1	Pass	
0.174	L2	50.8	33.2	79	66	28.2	32.8	Pass	
22.646	L2	38.2	29.6	73	60	34.8	30.4	Pass	

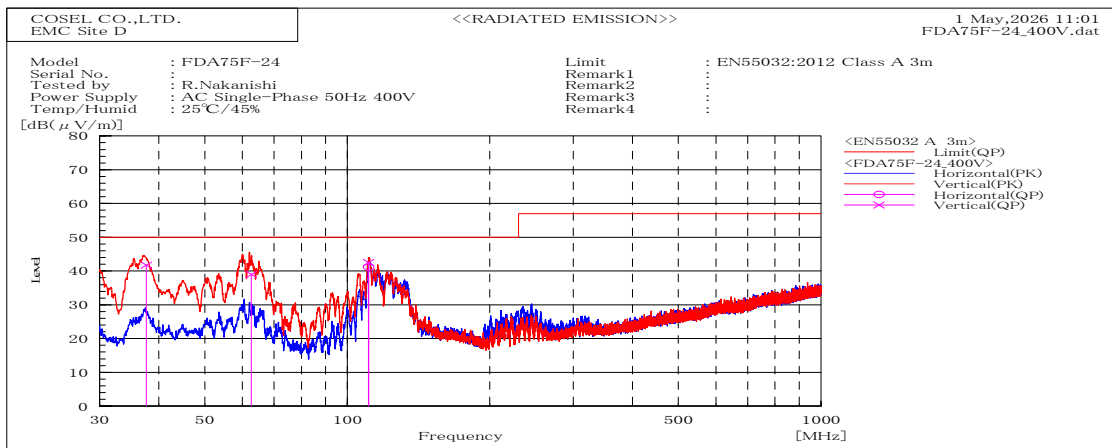


Frequency MHz	Polarization	Stability	Level dB(μV/m)		Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP					
37.642	V	Stable	41.8	50	8.2	Pass	100	141.7	
62.733	V	Stable	39	50	11	Pass	100.2	278.6	
110.851	V	Stable	42.5	50	7.5	Pass	146	82.5	
110.952	H	Stable	41.2	50	8.8	Pass	185.5	23.4	




DATA SHEET		Date	21-May-26
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI	Humid.	45 %RH
	Line conduction & Radiated emission	Tested by	R.Nakanishi

1. Line conduction

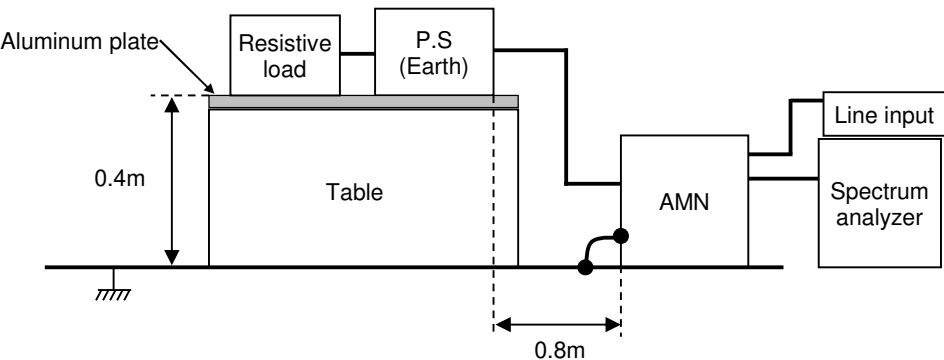

2. Radiated emission

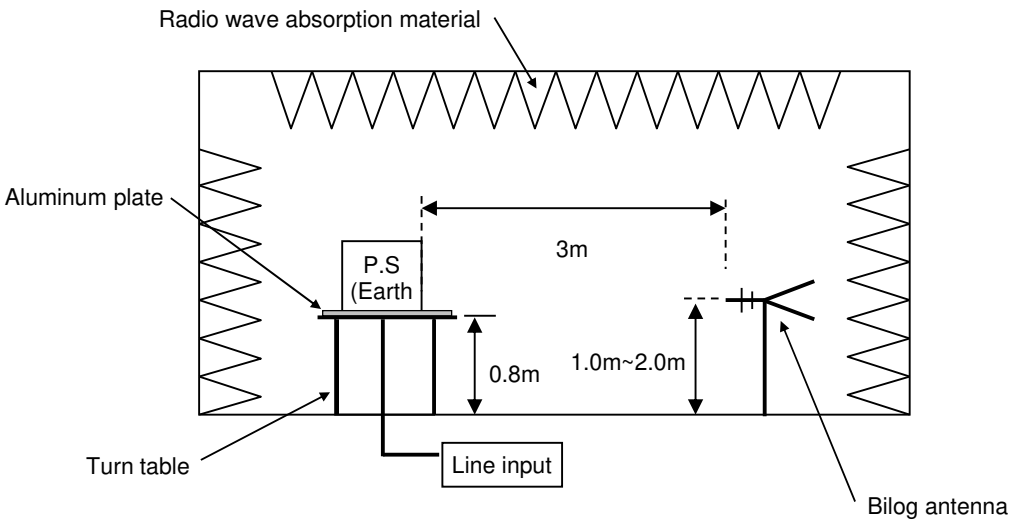




### Conditions

Test : EMI  
Model Name: FDA75F-24

○Photographs of Test Set-Up

#### 1.LINE CONDUCTION

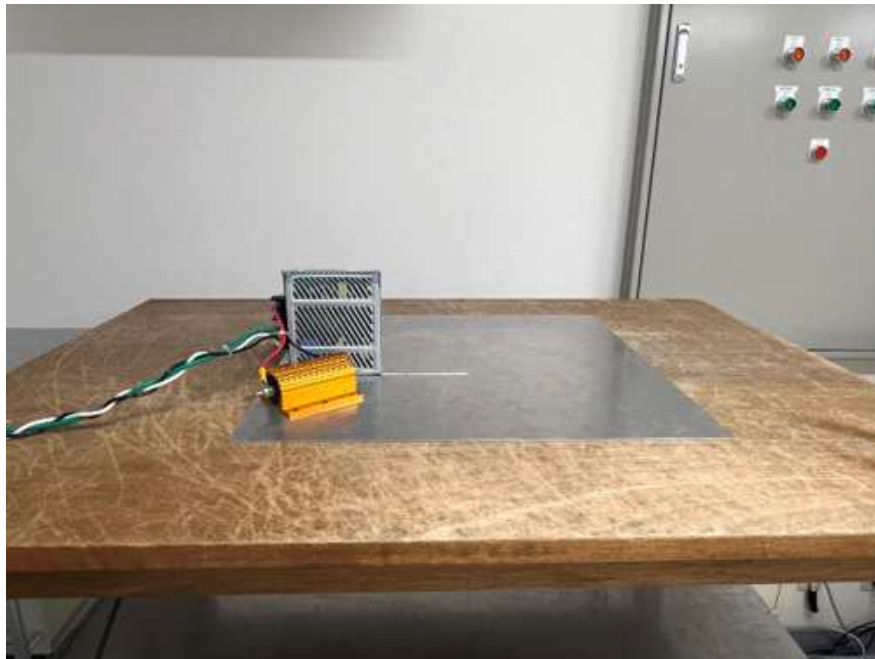

#### 2.RADIATED EMISSION

