



DATA SHEET

Model PDW30F-15


Date 11-Apr-26

Test EMI
Line conduction & Radiated emission


Temp. 25 degreeC

Humid. 40 %RH

Tested by T.Sakuma

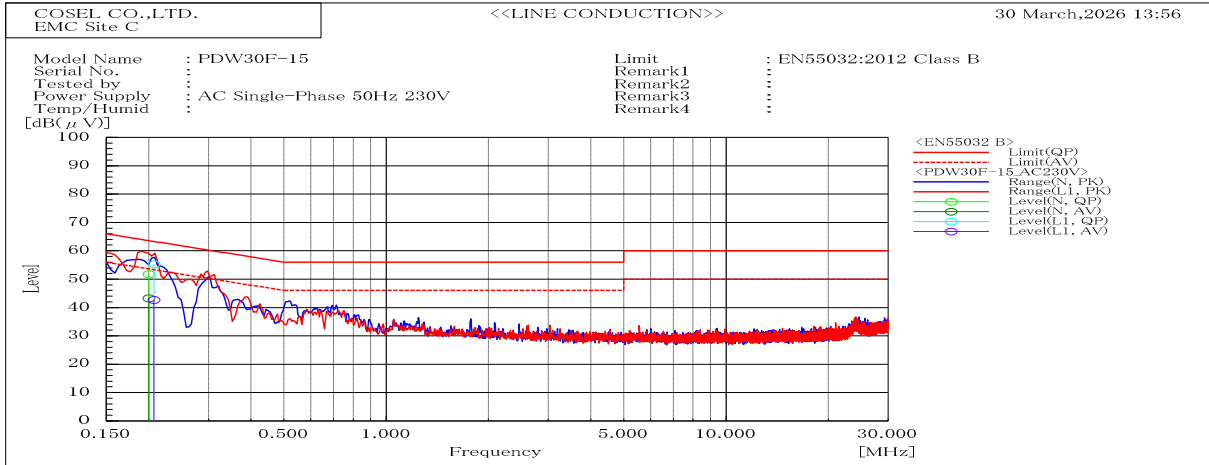

Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.2	N	51.7	43.2	63.6	53.6	11.9	10.4	Pass	
0.207	L1	55.3	42.6	63.3	53.3	8	10.7	Pass	

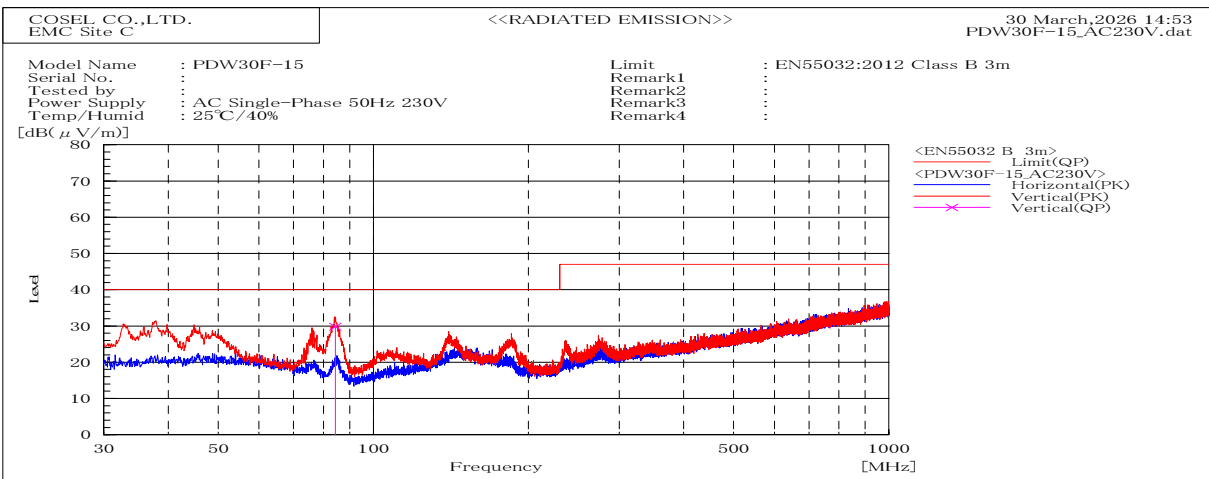


Frequency	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height	Angle	Remark
MHz			dB(μV/m)	dB(μV/m)	dB		cm	deg	
			QP	QP	QP				
84.392	V	Stable	29.8	40	10.2	Pass	100	268.2	




DATA SHEET		Date	11-Apr-26
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T.Sakuma

1. Line conduction

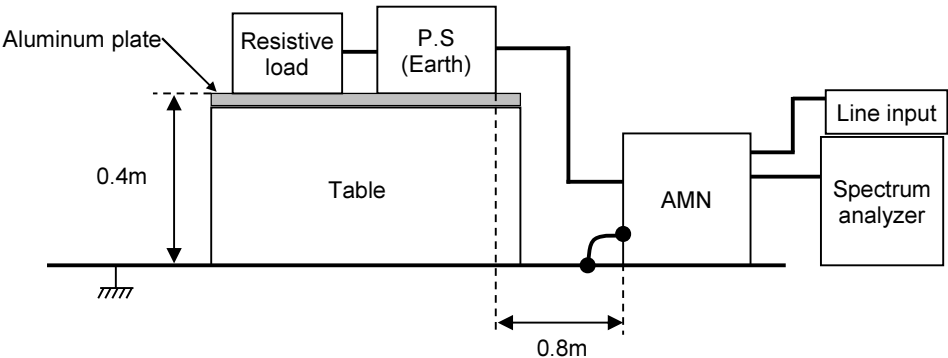

2. Radiated emission

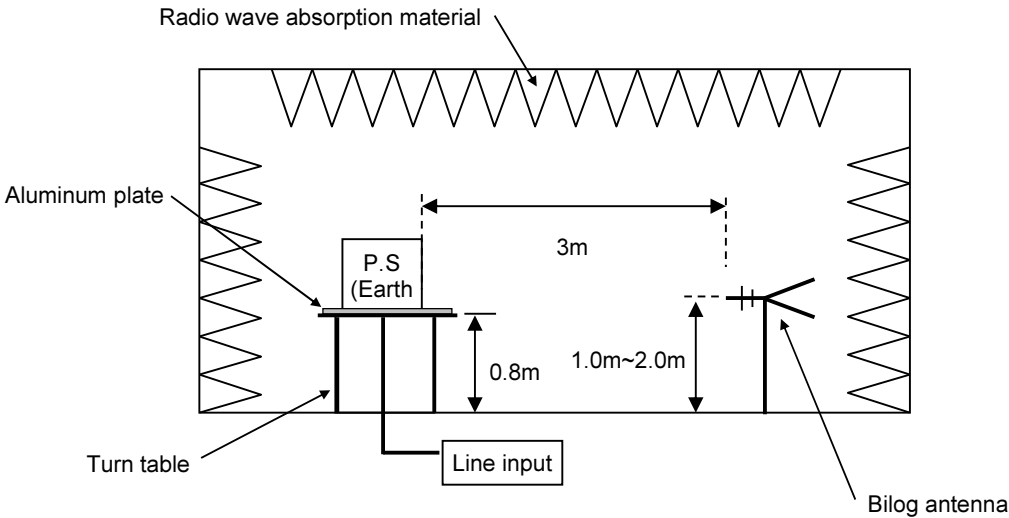




Conditions

Test : EMI
Model Name : PDW30F-15

1. Line conduction

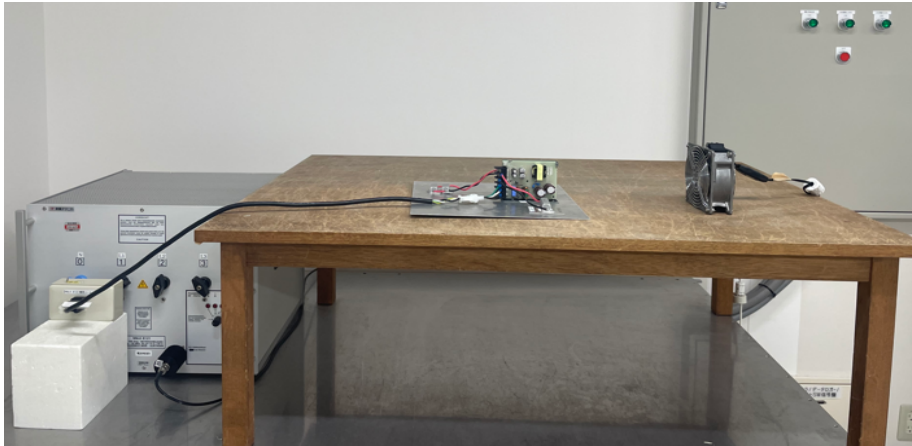

2. Radiated emission

