


## PDW50F-15 Expected Life : 推定寿命

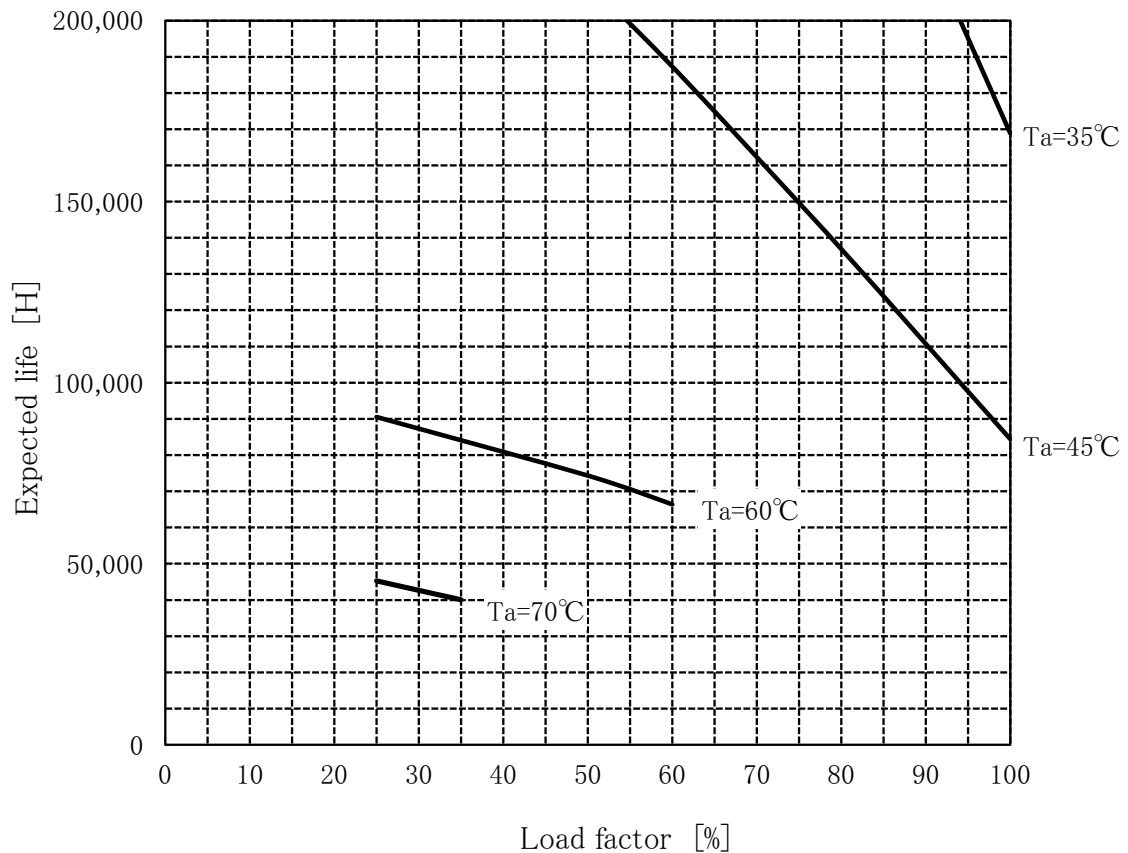

- Above expected life time is calculated according our calculation standard.  
上記推定寿命は、当社算出基準に従い算出したものです。
- Over the area of 100,000 hours, the degradation of sealing rubber, etc., is not included in the calculation.  
10万時間以上の領域では、封ロゴムの劣化等の影響は、計算式には含まれていません。

### Conditions

(1) Input voltage 85 ~ 264VAC 60Hz

(2) Output voltage  
Output current

| DC<br>OUTPUT | Load factor |        |        |        |
|--------------|-------------|--------|--------|--------|
|              | 100%        | 75%    | 50%    | 25%    |
| ±15V         | 1.700A      | 1.275A | 0.850A | 0.425A |

(3) Cooling method Convection

(4) Mounting method Refer below

