



DATA SHEET		Date	16-Mar-26
Model	PJA15F-12	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	H.Ota

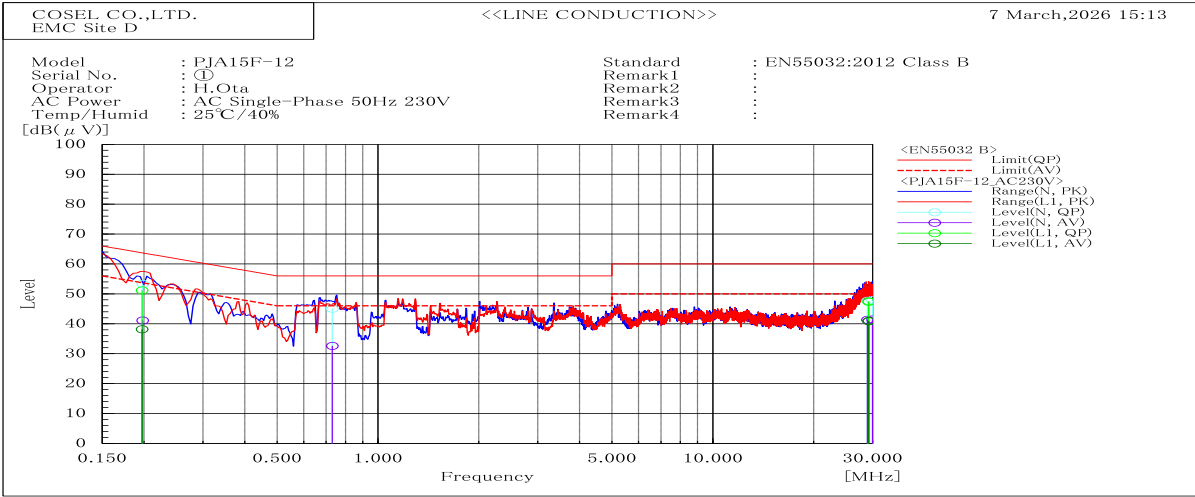


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.198	N	53.4	41.1	63.7	53.7	10.3	12.6	Pass	
0.73	N	45	32.6	56	46	11	13.4	Pass	
28.93	N	47.7	41.3	60	50	12.3	8.7	Pass	
29.967	N	47.8	41.4	60	50	12.2	8.6	Pass	
0.197	L1	51.2	38.2	63.7	53.7	12.5	15.5	Pass	
29.197	L1	47.4	40.9	60	50	12.6	9.1	Pass	
29.23	L1	47.4	40.9	60	50	12.6	9.1	Pass	

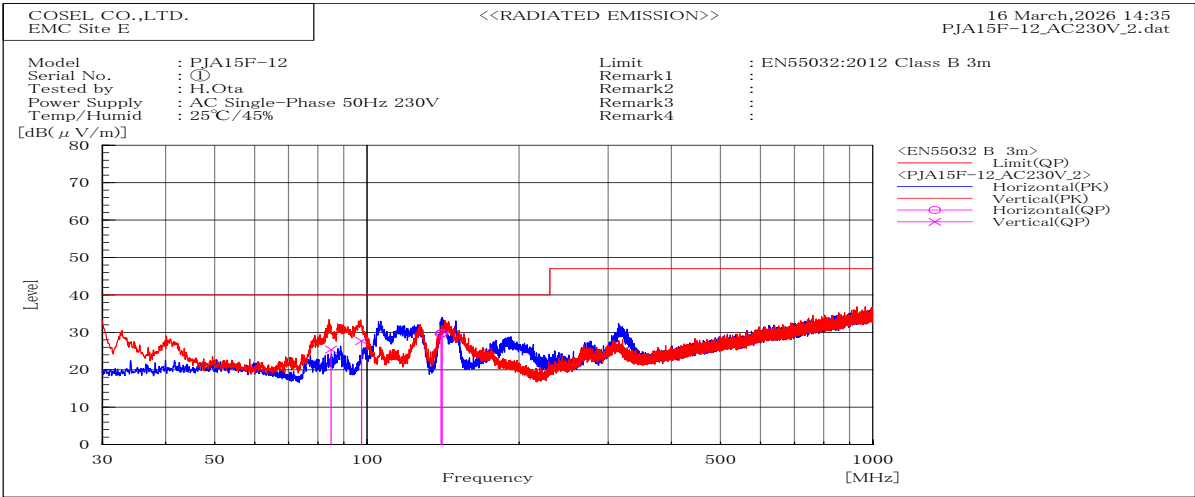


Frequency MHz	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height cm	Angle deg	Remark
			dB(μV/m) QP	dB(μV/m) QP	dB QP				
84.919	V	Stable	25.4	40	14.6	Pass	101.8	0	
97.603	V	Stable	27.7	40	12.3	Pass	120.2	0	
140.064	H	Stable	29.6	40	10.4	Pass	199.7	169.1	
140.836	H	Stable	29.8	40	10.2	Pass	199.4	180.9	

DATA SHEET		Date	16-Mar-26
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI	Humid.	40 %RH
	Line conduction & Radiated emission	Tested by	H.Ota

1. Line conduction

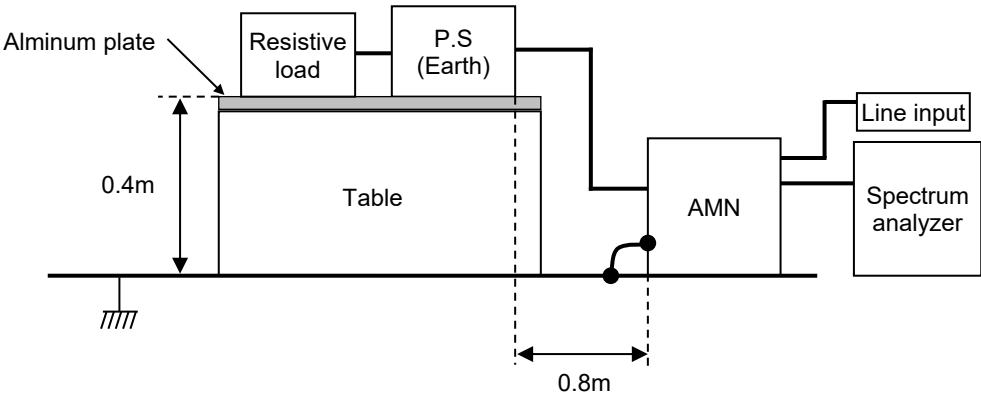


2. Radiated emission

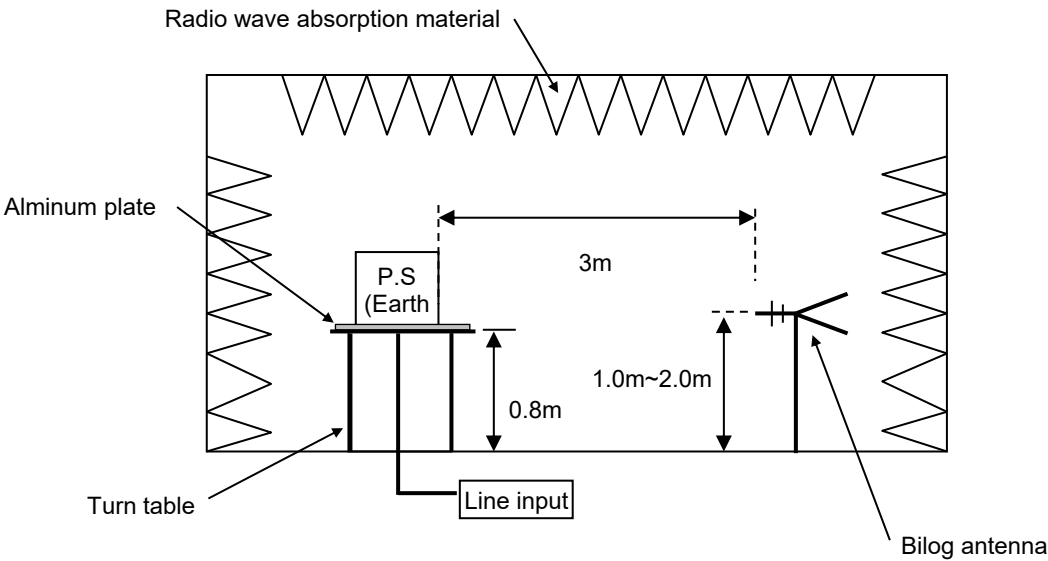

Conditions

Test : EMI
Model Name : PJA15F-12

1.LINE CONDUCTION

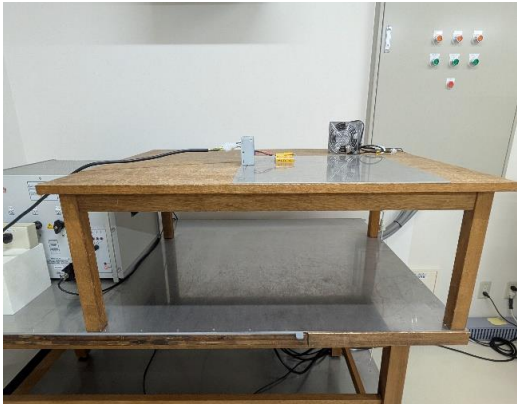

2.RADIATED EMISSION

