



DATA SHEET		Date	07-Mar-26
Model	PJA15F-15	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	H.Ota

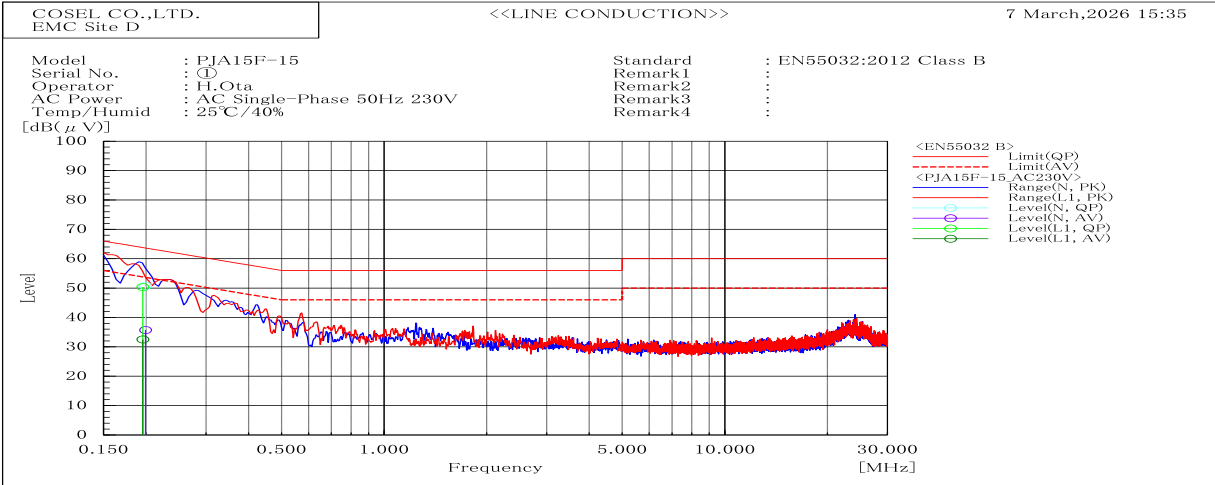


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.196	L1	50.3	32.5	63.8	53.8	13.5	21.3	Pass	
0.199	N	50.8	35.7	63.6	53.6	12.8	17.9	Pass	

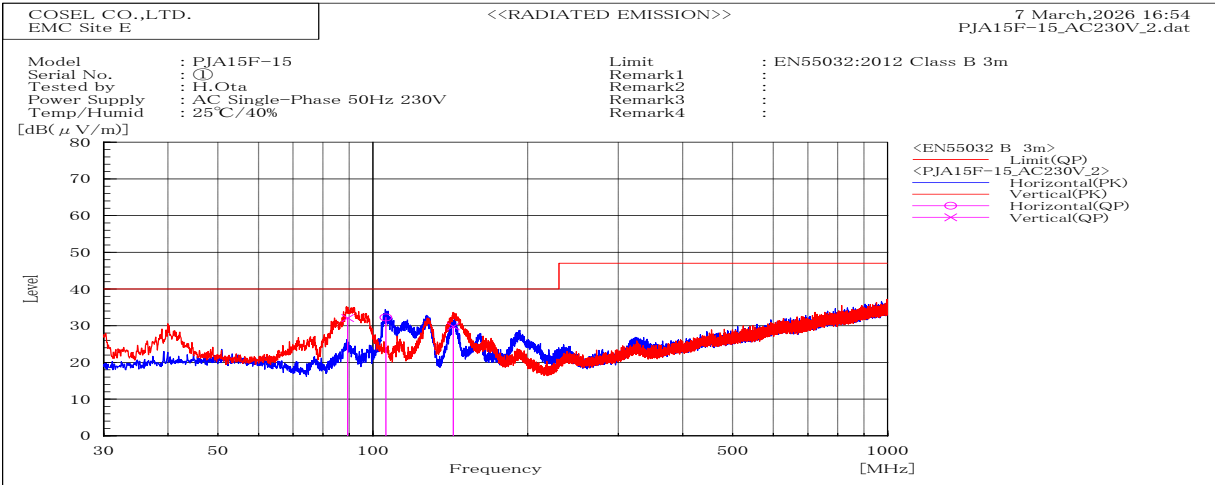


Frequency	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height	Angle	Remark
MHz			dB(μV/m)	dB(μV/m)	dB		cm	deg	
			QP	QP	QP				
89.35	V	Stable	32.1	40	7.9	Pass	139.3	196.2	
106.044	H	Stable	32.2	40	7.8	Pass	179.1	177.2	
143.328	V	Stable	29.8	40	10.2	Pass	100	336.4	

DATA SHEET		Date	07-Mar-26
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI	Humid.	40 %RH
	Line conduction & Radiated emission	Tested by	H.Ota

1. Line conduction

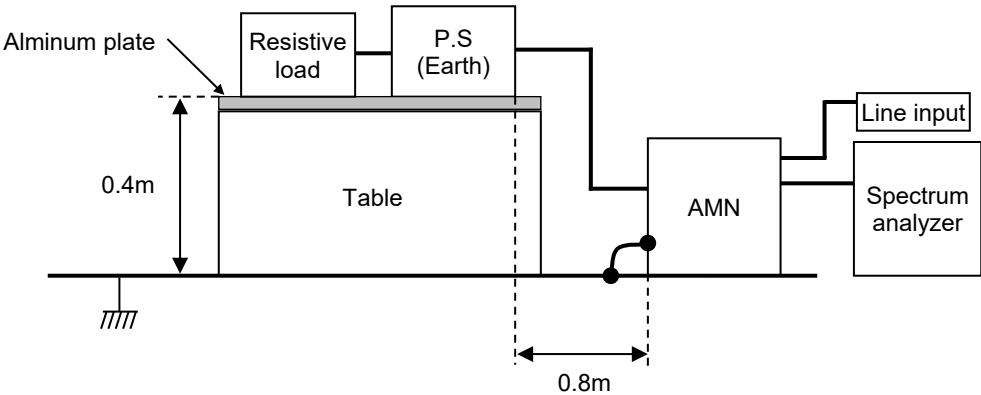


2. Radiated emission

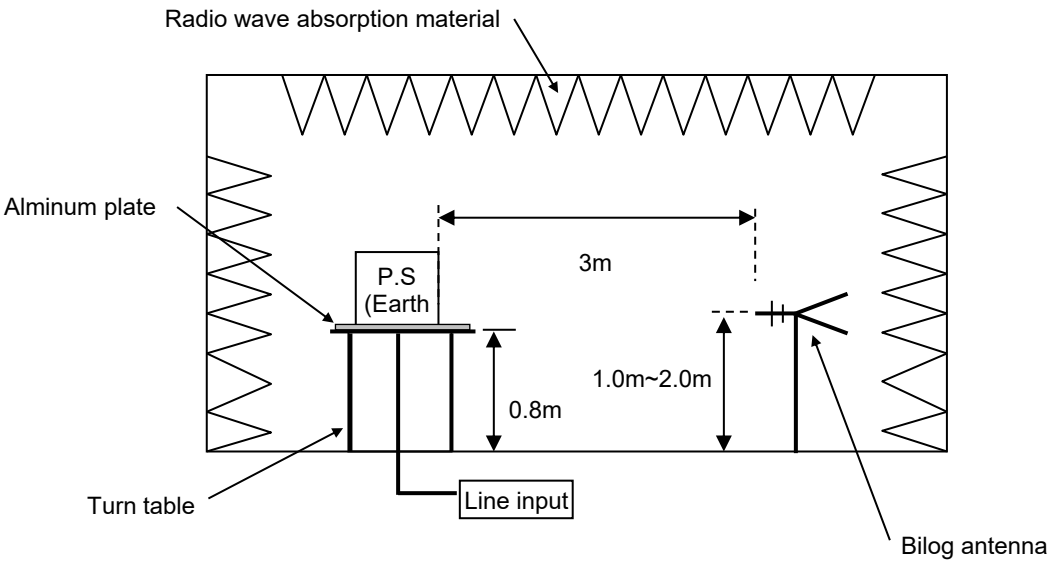

Conditions

Test : EMI
Model Name : PJA15F-15

1.LINE CONDUCTION

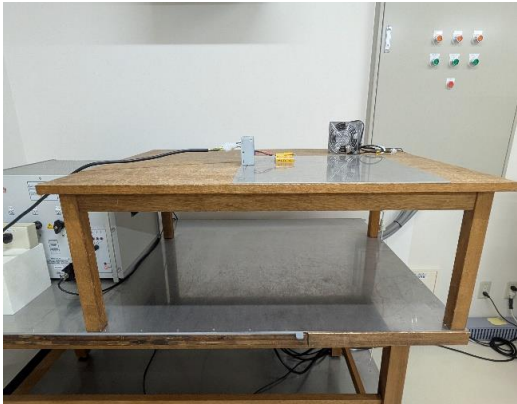

2.RADIATED EMISSION

