



DATA SHEET		Date	17-Mar-26
Model	PJA15F-24	Temp.	25 degreeC
Test	EMI	Humid.	40 %RH
	Line conduction & Radiated emission	Tested by	H.Ota

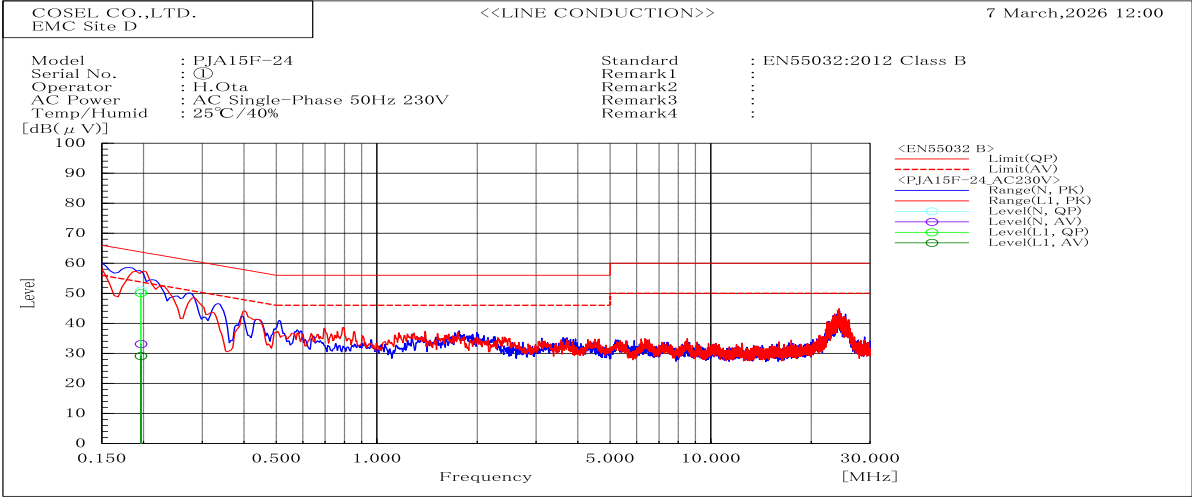


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.196	L1	50.1	29.1	63.8	53.8	13.7	24.7	Pass	
0.197	N	50.9	33.1	63.8	53.8	12.9	20.7	Pass	

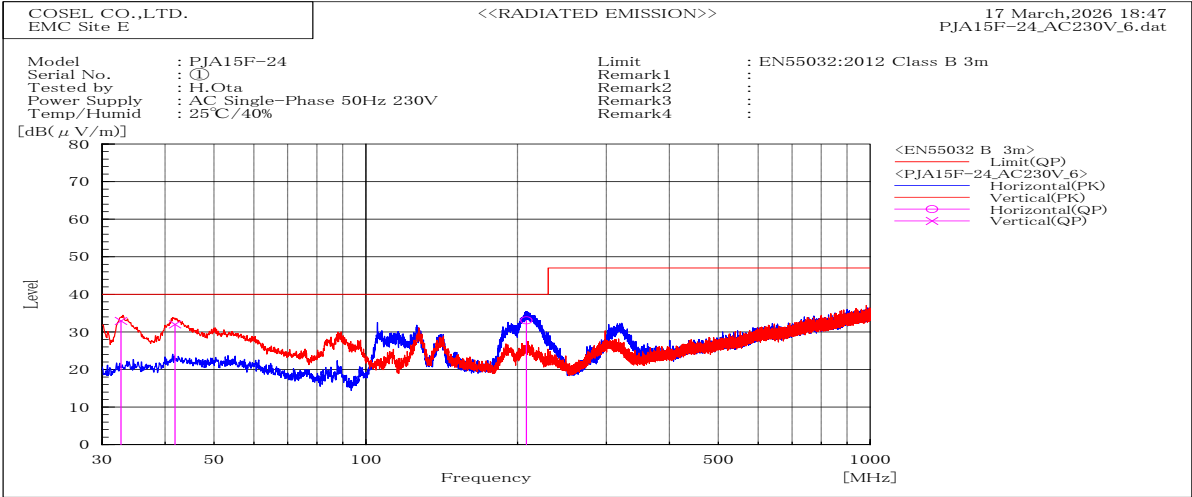


Frequency MHz	Polarization	Stability	Level dB(μV/m)		Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP		QP				
32.703	V	Stable	32.9	40	7.1	Pass	100.3	275.8		
41.845	V	Stable	32	40	8	Pass	100.5	329		
208.112	H	Stable	33.1	40	6.9	Pass	116.2	188.5		

DATA SHEET		Date	17-Mar-26
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI	Humid.	40 %RH
	Line conduction & Radiated emission	Tested by	H.Ota

1. Line conduction

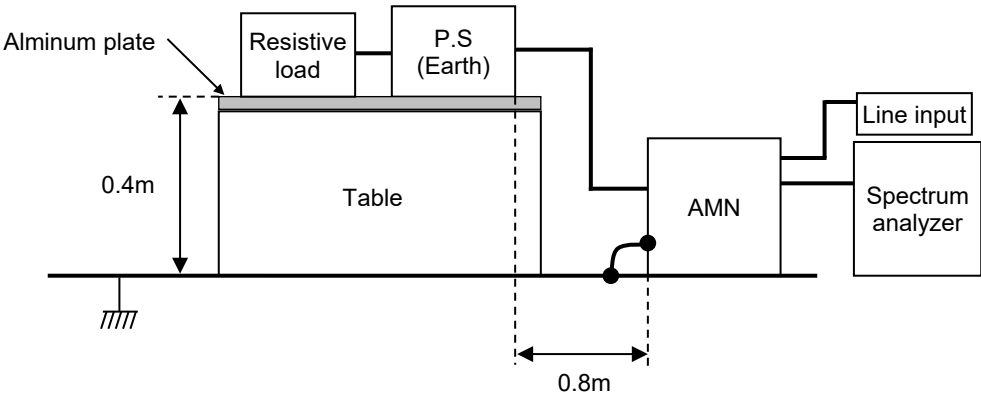


2. Radiated emission

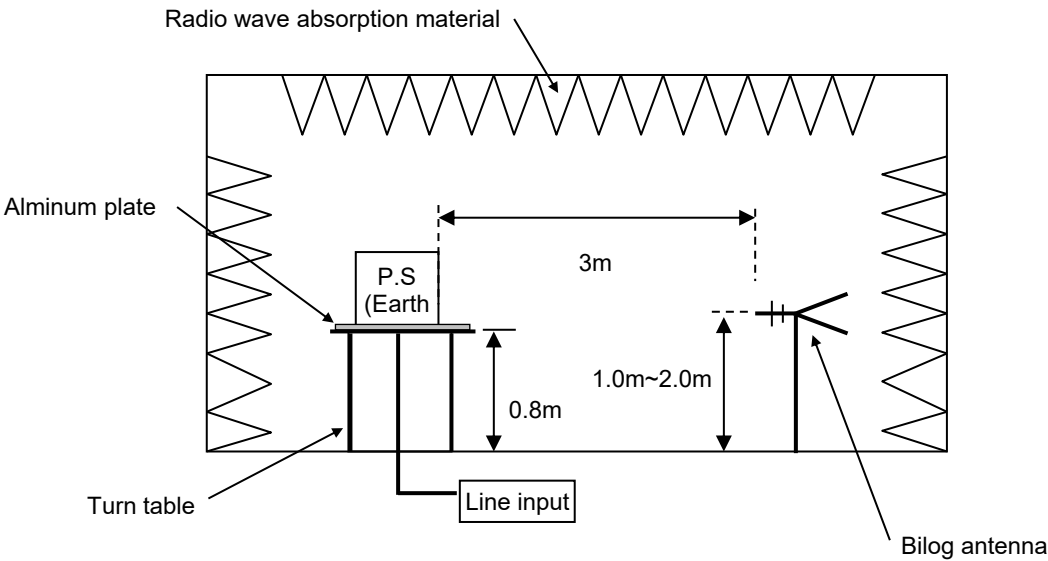

Conditions

Test : EMI
Model Name : PJA15F-24

1.LINE CONDUCTION

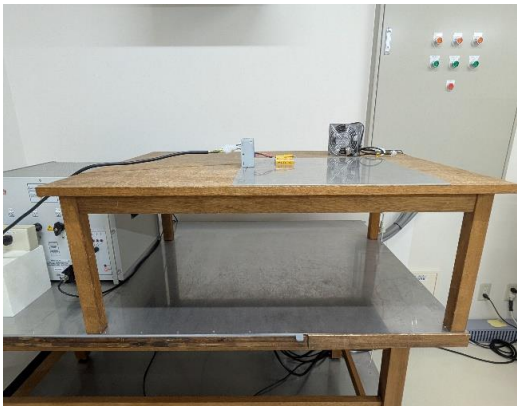

2.RADIATED EMISSION

