



DATA SHEET		Date	19-Mar-26
Model	PJA15F-5	Temp.	25 degreeC
Test	EMI	Humid.	40 %RH
	Line conduction & Radiated emission	Tested by	H.Ota

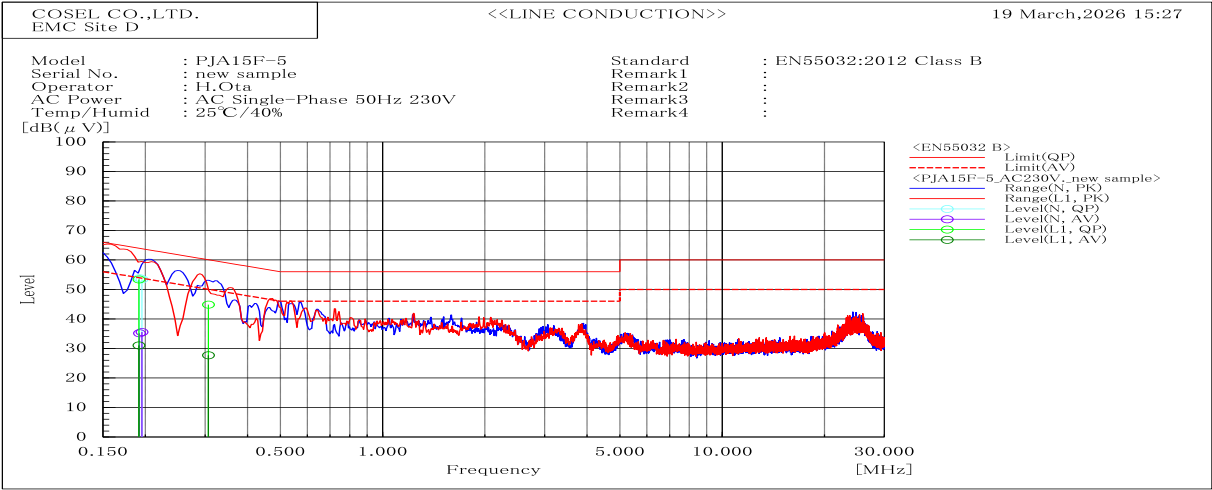


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.192	N	53.9	35.2	63.9	53.9	10	18.7	Pass	
0.195	N	53.4	35.6	63.8	53.8	10.4	18.2	Pass	
0.192	L1	53.4	31.1	64	54	10.6	22.9	Pass	
0.307	L1	44.9	27.7	60.1	50.1	15.2	22.4	Pass	

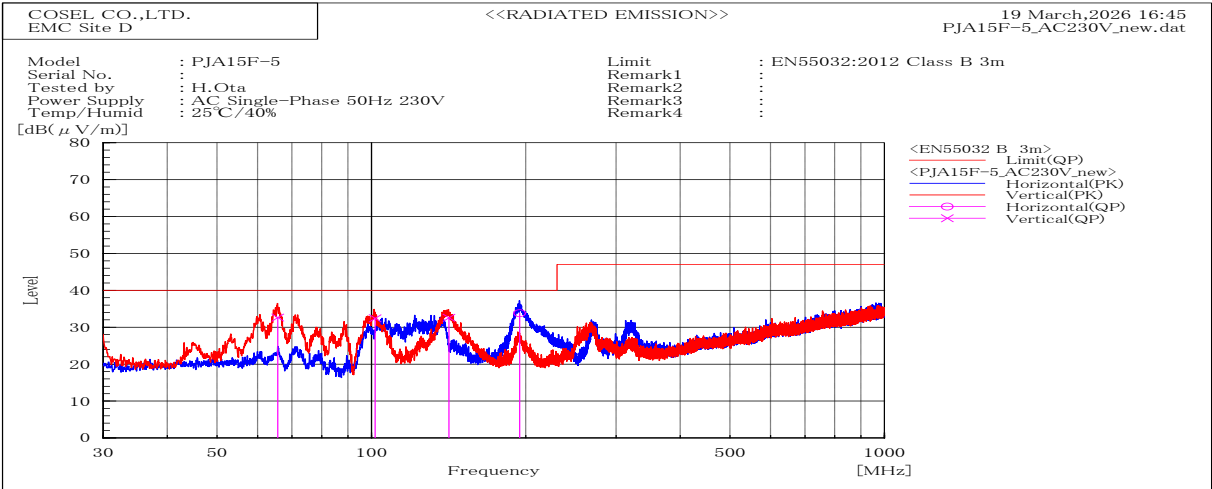


Frequency MHz	Polarization	Stability	Level		Limit	Margin	Pass/Fail	Height cm	Angle deg	Remark
			QP	AV						
65.677	V	Stable	32.6		40	7.4	Pass	100	51.9	
101.638	V	Stable	32.4		40	7.6	Pass	122.8	151.4	
141.564	V	Stable	32.6		40	7.4	Pass	101.7	166	
194.57	H	Stable	33.8		40	6.2	Pass	198.3	349.2	

DATA SHEET		Date	19-Mar-26
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI	Humid.	40 %RH
	Line conduction & Radiated emission	Tested by	H.Ota

1. Line conduction

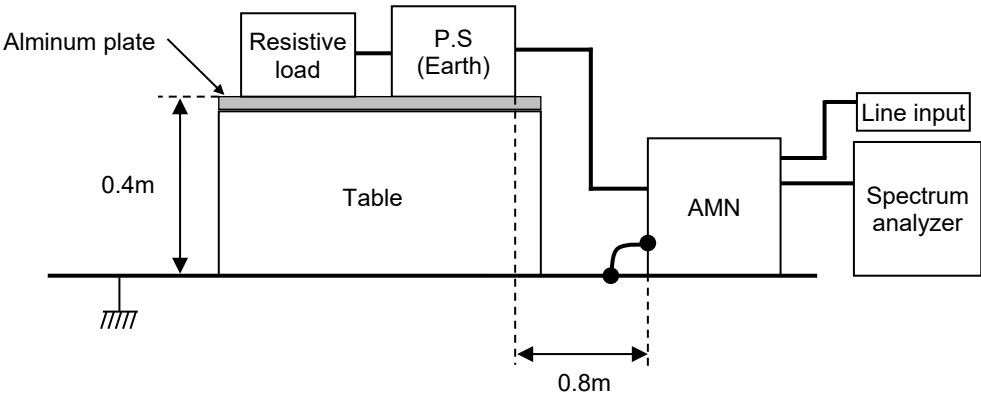


2. Radiated emission

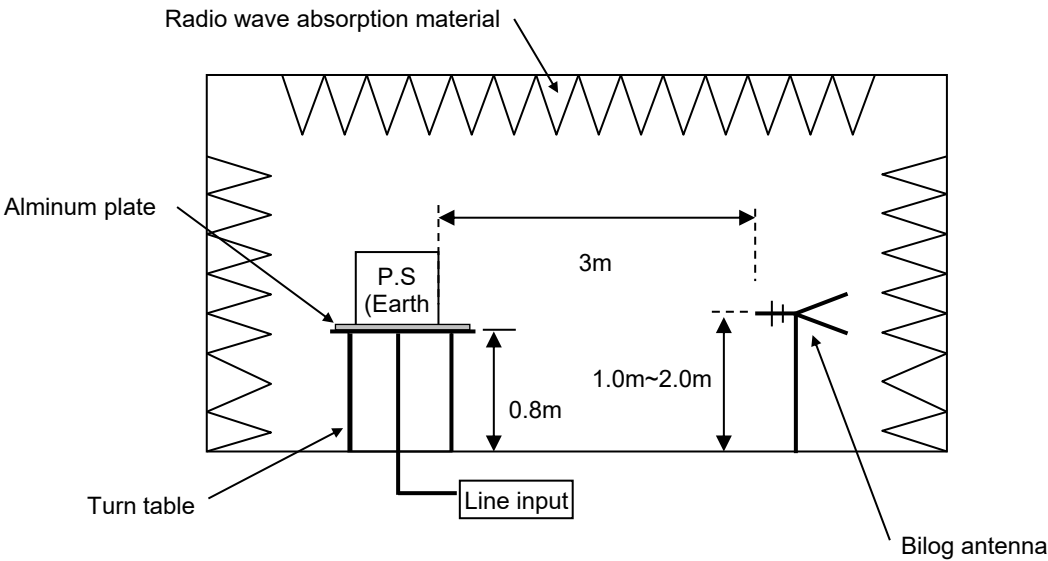

Conditions

Test : EMI
Model Name : PJA15F-5

1.LINE CONDUCTION

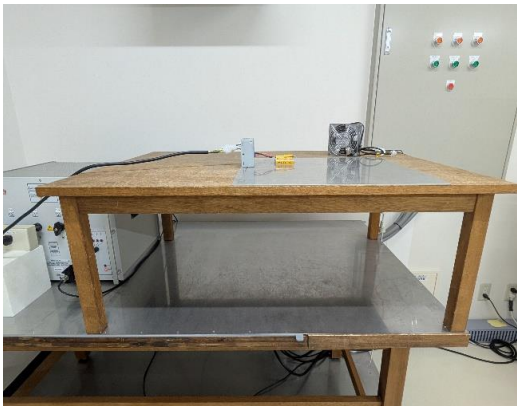

2.RADIATED EMISSION

