



DATA SHEET		Date	07-Mar-26
Model	PJA30F-12	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	H.Ota

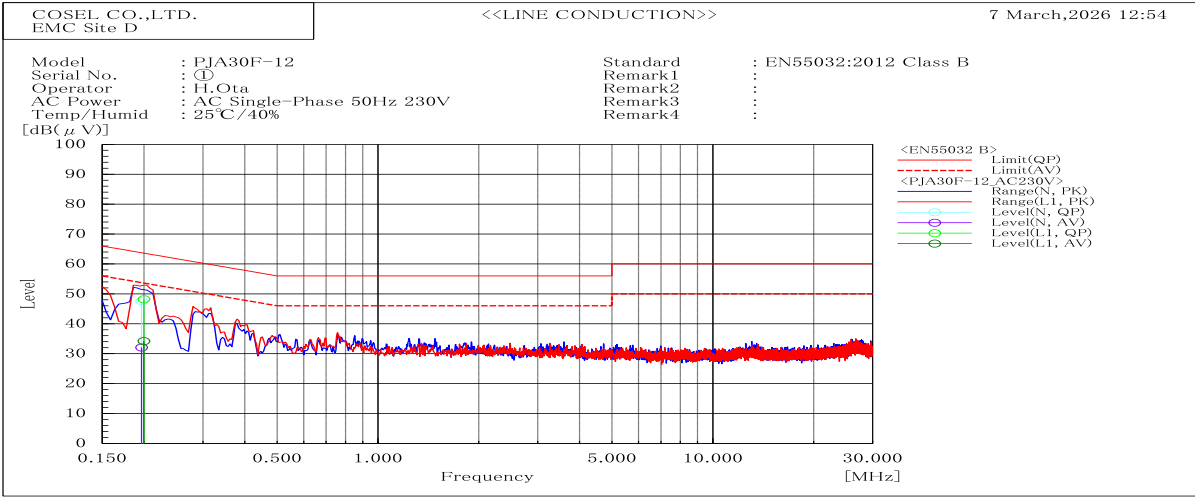


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.197	N	47.6	32.1	63.8	53.8	16.2	21.7	Pass	
0.2	L1	48.2	34.2	63.6	53.6	15.4	19.4	Pass	

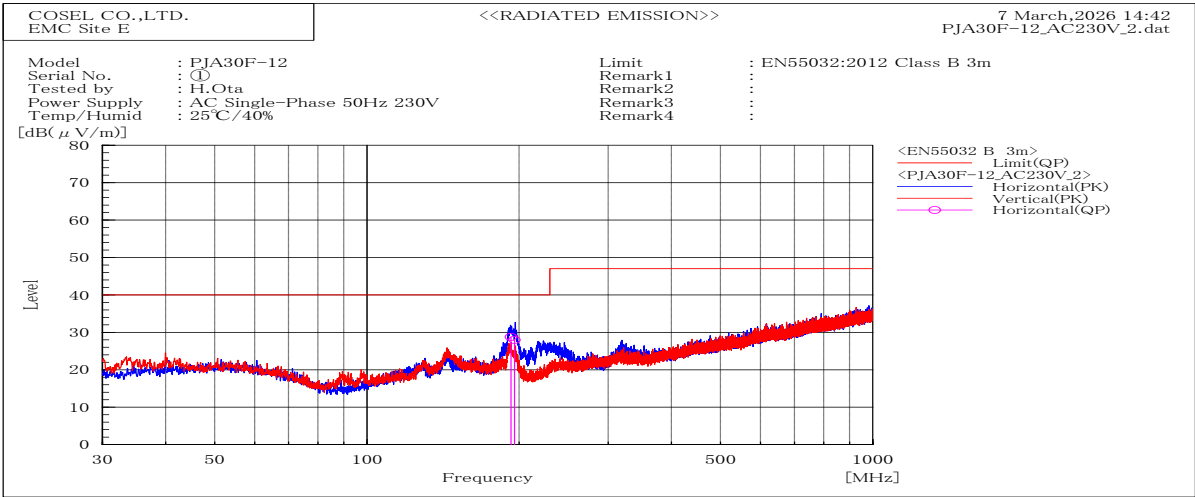


Frequency MHz	Polarization	Stability	Level dB(μV/m)		Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
192.71	H	Stable	28.8	40	11.2	Pass	113.9	183.8	
195.843	H	Stable	28	40	12	Pass	107.1	323.4	

DATA SHEET		Date	07-Mar-26
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI	Humid.	40 %RH
	Line conduction & Radiated emission	Tested by	H.Ota

1. Line conduction

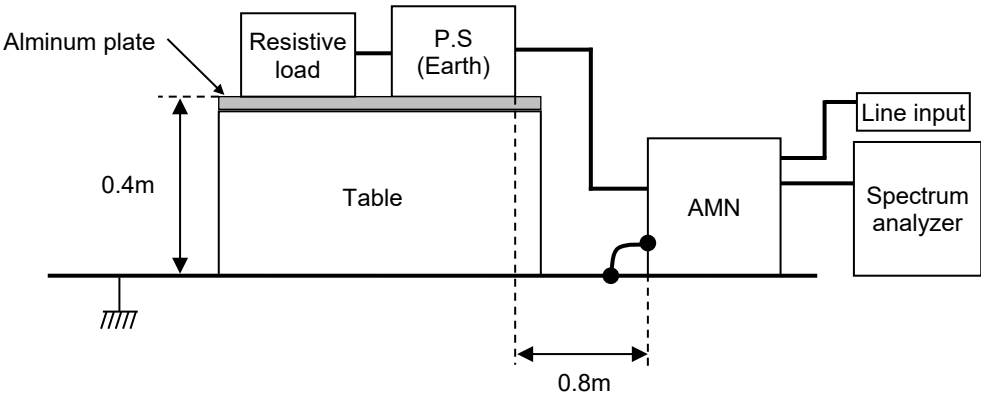



2. Radiated emission

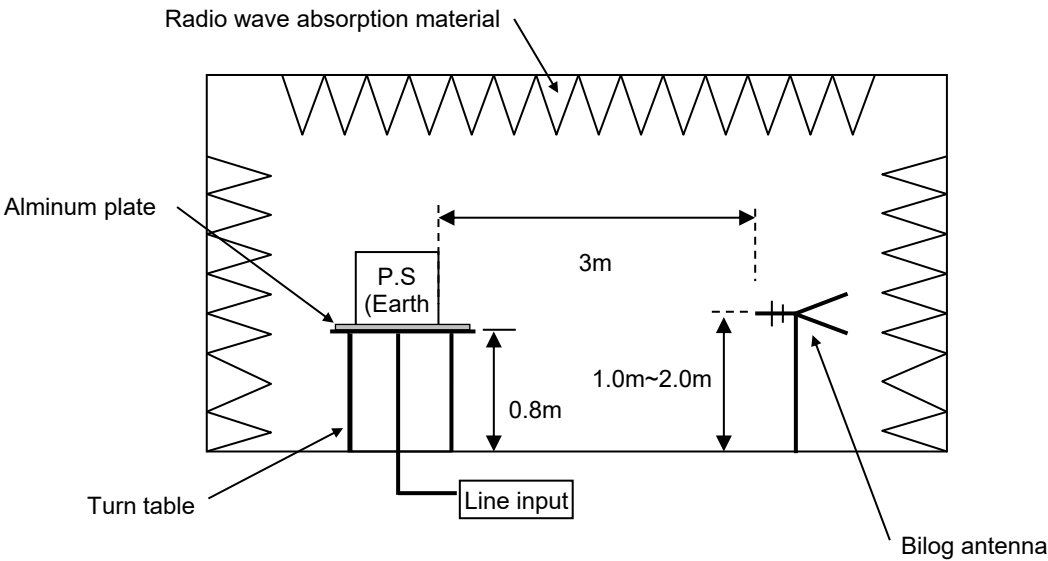

Conditions

Test : EMI
Model Name : PJA30F-12

1.LINE CONDUCTION

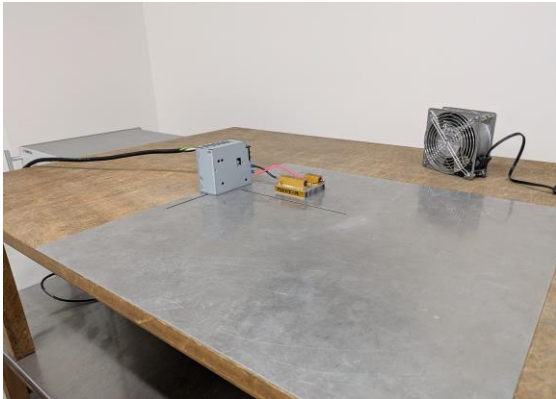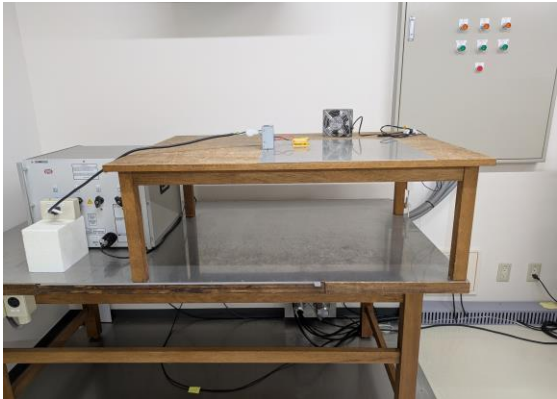

2.RADIATED EMISSION

