



DATA SHEET		Date	07-Mar-26
Model	PJA30F-15	Temp.	25 degreeC
Test	EMI	Humid.	40 %RH
	Line conduction & Radiated emission	Tested by	H.Ota

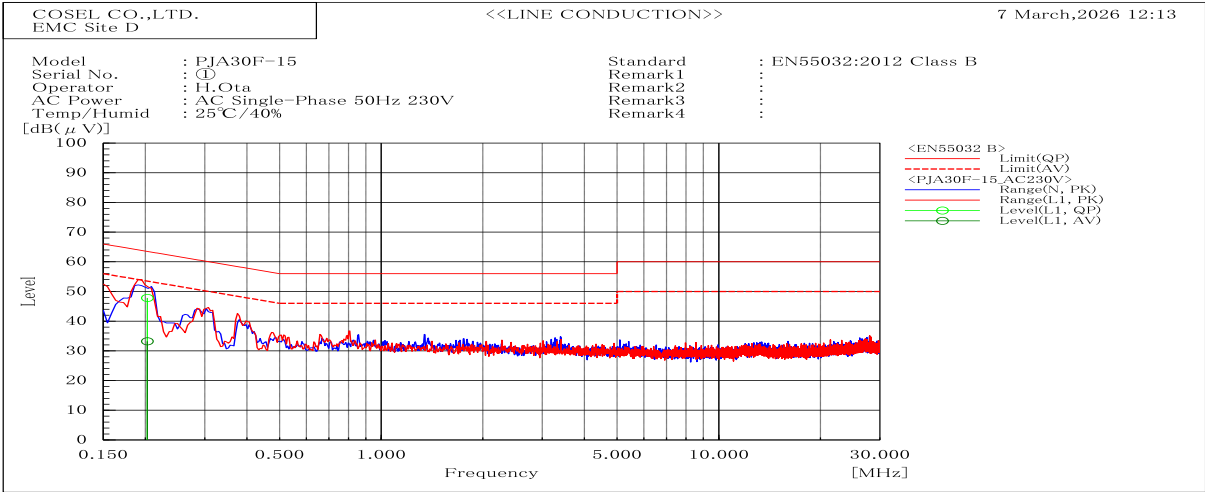


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.203	L1	47.8	33.2	63.5	53.5	15.7	20.3	Pass	

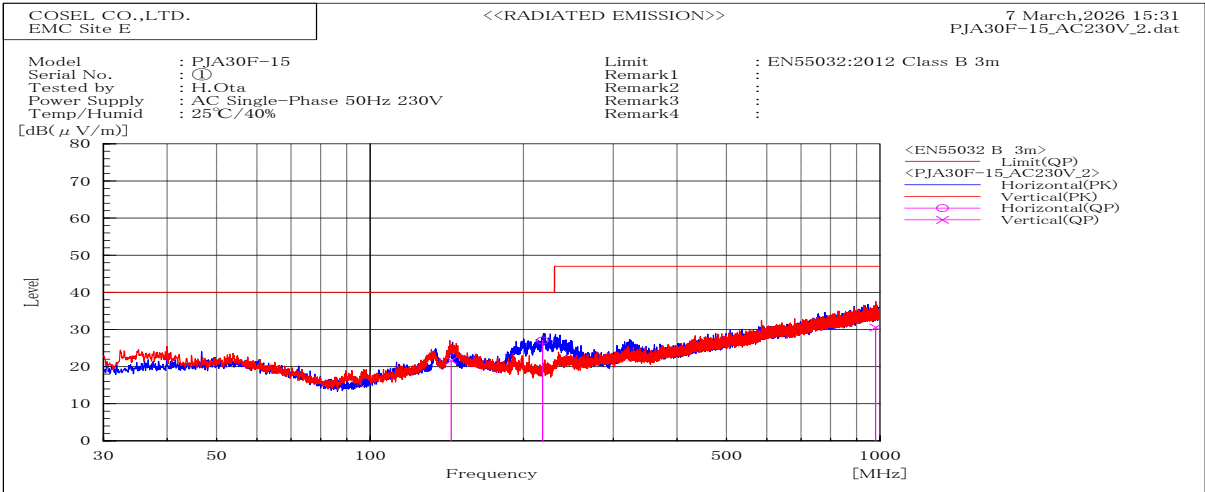


Frequency MHz	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height cm	Angle deg	Remark
			dB(μV/m) QP	dB(μV/m) QP	dB QP				
217.992	H	Stable	27	40	13	Pass	149.9	318.5	
979.841	V	Stable	30.6	47	16.4	Pass	132.8	241.4	
144.272	V	Stable	21.7	40	18.3	Pass	100.2	32.8	

DATA SHEET		Date	07-Mar-26
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI	Humid.	40 %RH
	Line conduction & Radiated emission	Tested by	H.Ota

1. Line conduction

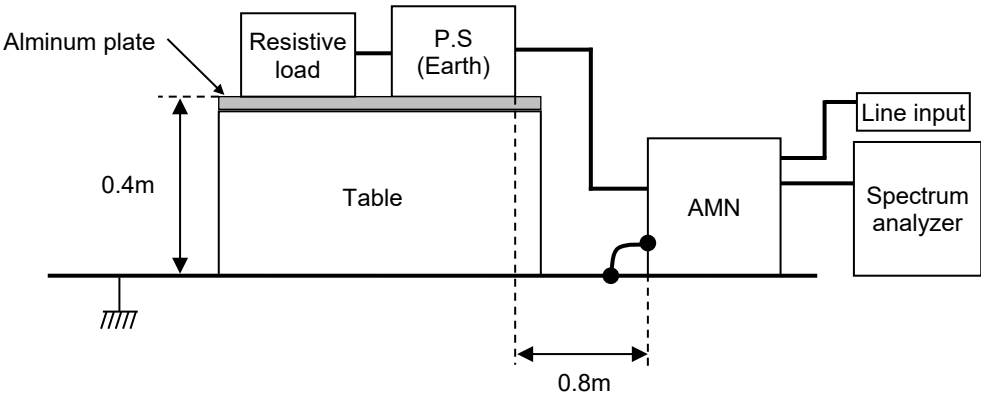



2. Radiated emission

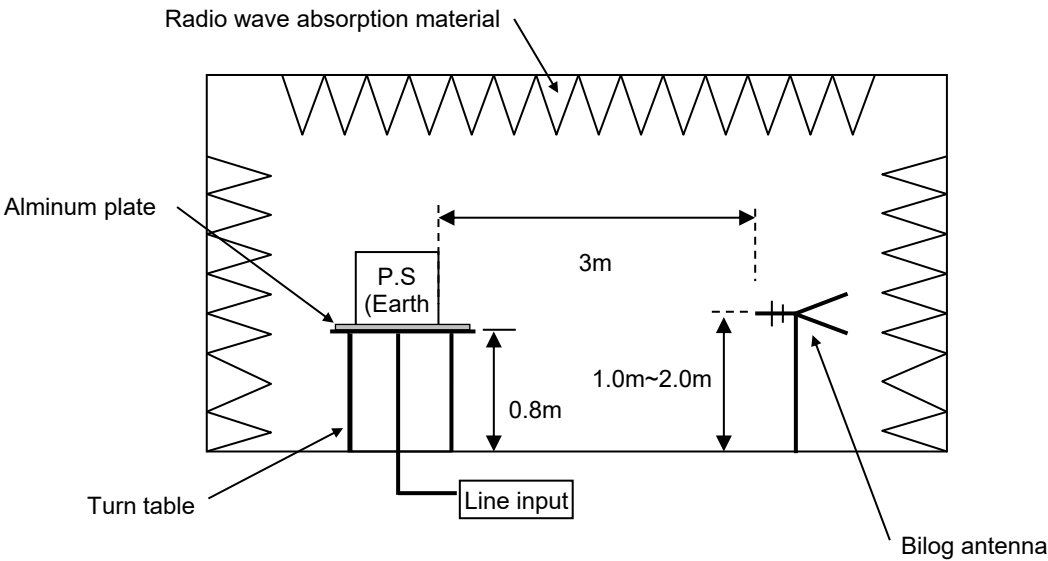

Conditions

Test : EMI
Model Name : PJA30F-15

1.LINE CONDUCTION

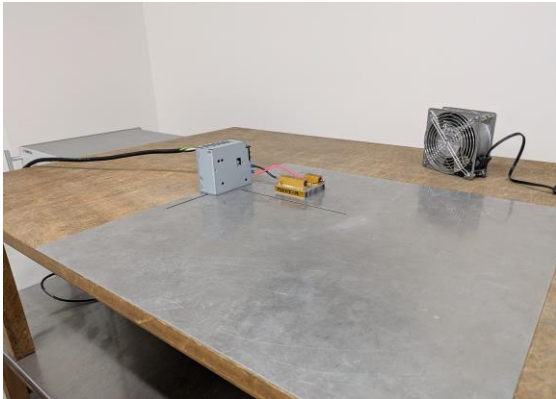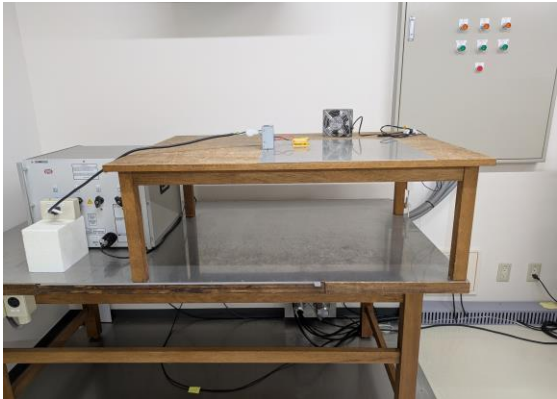

2.RADIATED EMISSION

