



DATA SHEET		Date	12-Mar-26
Model	PJA30F-24	Temp.	25 degreeC
Test	EMI	Humid.	40 %RH
	Line conduction & Radiated emission	Tested by	H.Ota

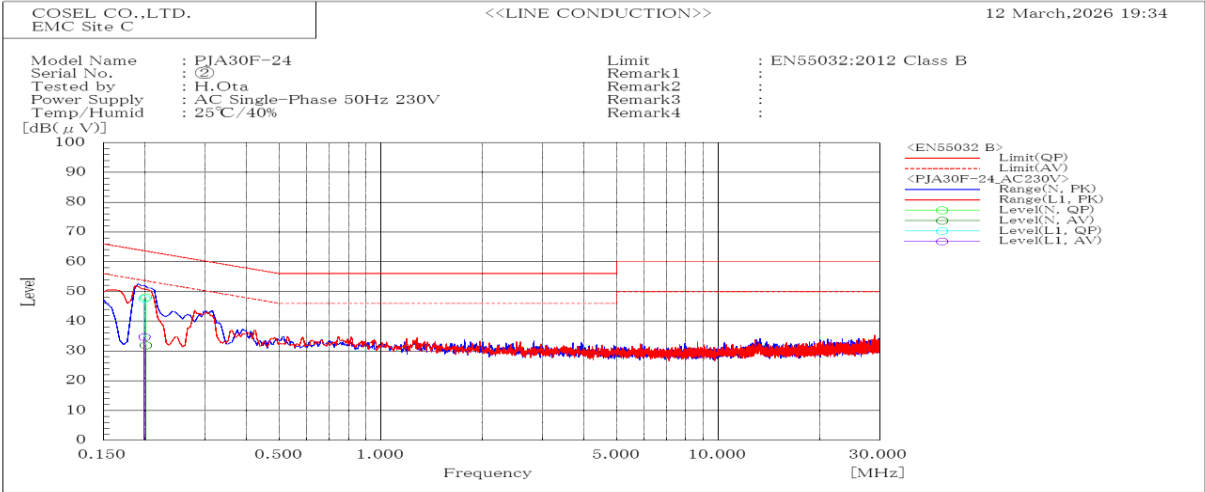


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.199	L1	47.5	34.7	63.7	53.7	16.2	19	Pass	
0.201	N	48	31.9	63.6	53.6	15.6	21.7	Pass	

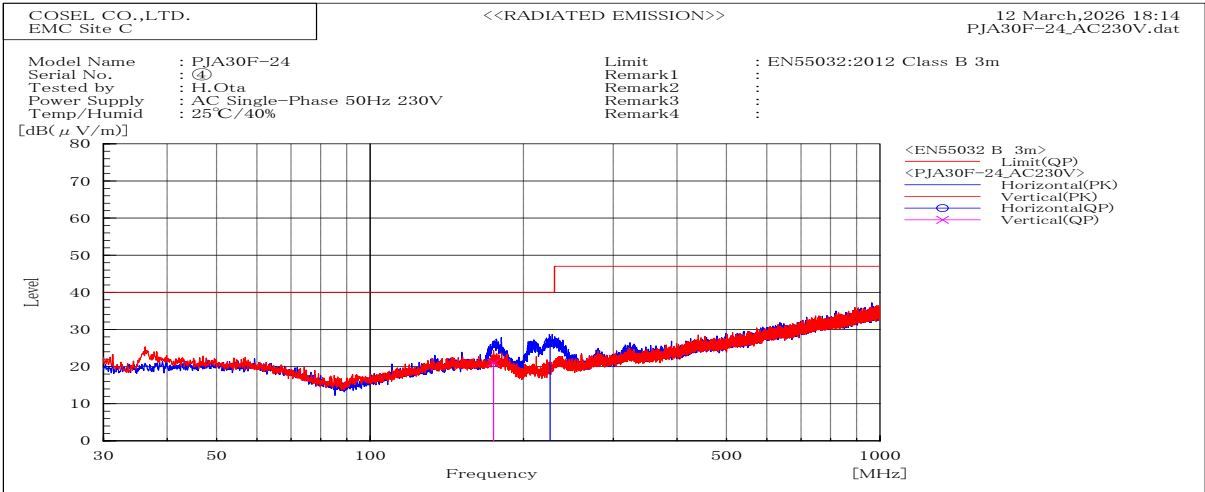


Frequency MHz	Polarization	Stability	Reading	Level	Limit	Margin	Pass/Fail	Height cm	Angle deg	Remark
			dB(uV)	dB(uV/m)	dB(uV/m)					
174.657	V	Stable	26.9	21	40	19	Pass	114.2	277	
225.5	H	Stable	34.6	26.4	40	13.6	Pass	144.6	196.9	

DATA SHEET		Date	12-Mar-26
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI	Humid.	40 %RH
	Line conduction & Radiated emission	Tested by	H.Ota

1. Line conduction

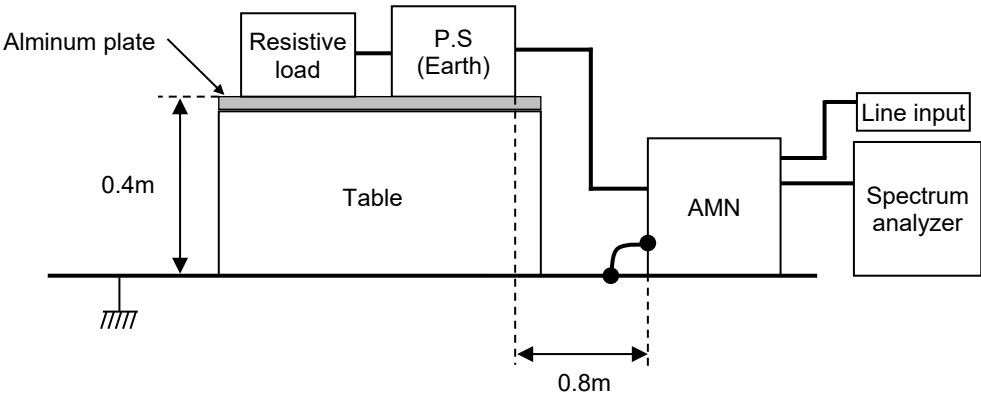



2. Radiated emission

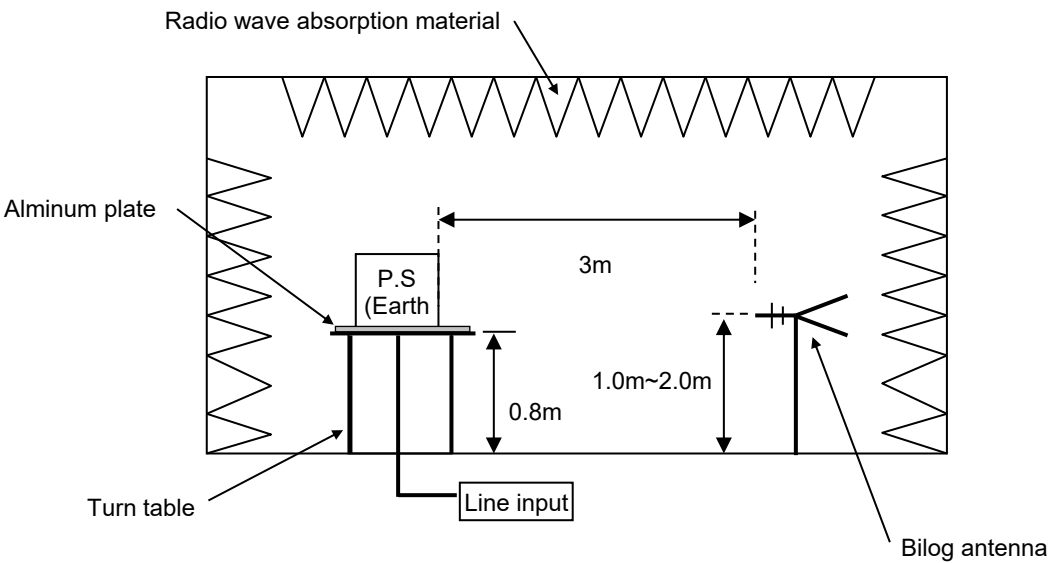

Conditions

Test : EMI
Model Name : PJA30F-24

1.LINE CONDUCTION

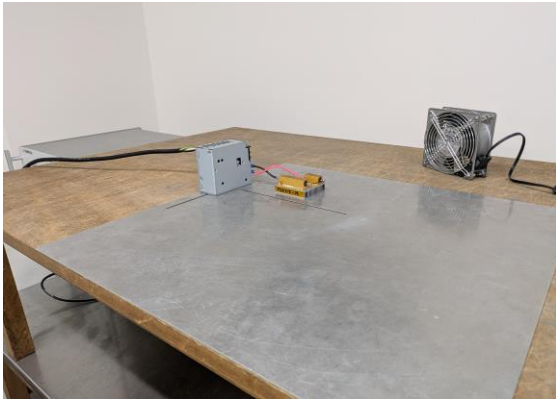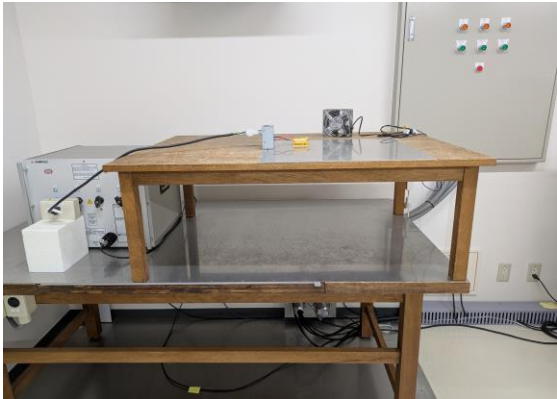

2.RADIATED EMISSION

