



DATA SHEET		Date	07-Mar-26
Model	PJA30F-5	Temp.	25 degreeC
Test	EMI	Humid.	40 %RH
	Line conduction & Radiated emission	Tested by	H.Ota

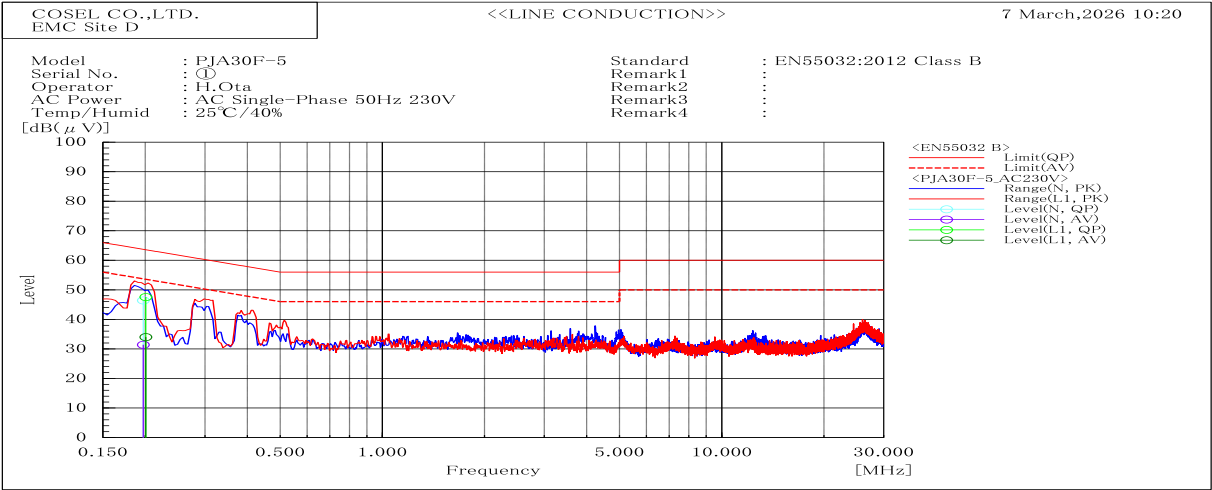


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.197	N	46.4	31.4	63.7	53.7	17.3	22.3	Pass	
0.201	L1	47.6	34	63.6	53.6	16	19.6	Pass	

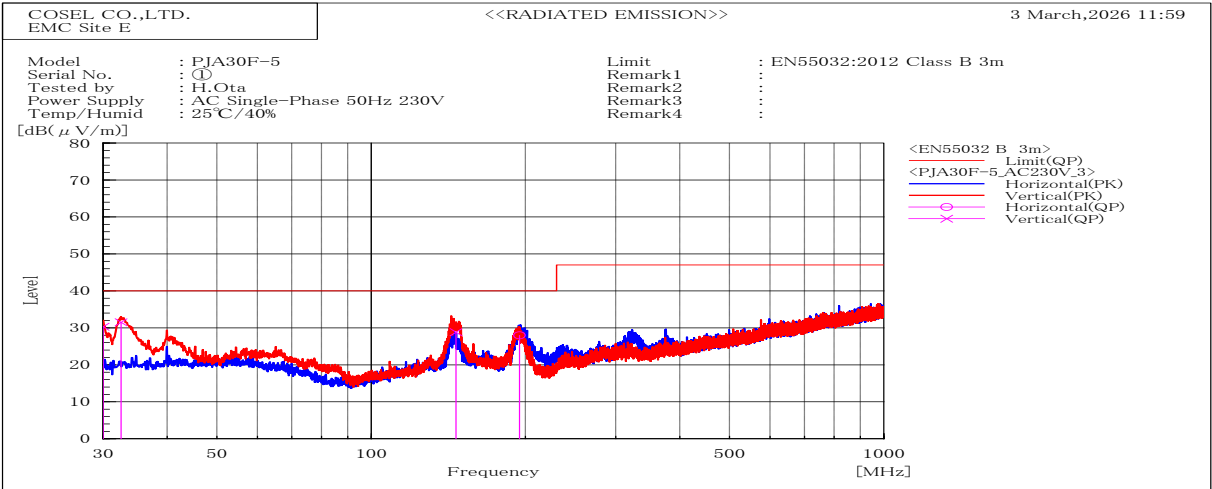


Frequency MHz	Polarization	Stability	Level		Limit	Margin	Pass/Fail	Height cm	Angle deg	Remark
			QP	AV						
30.003	V	Stable	30.3		40	9.7	Pass	100	284	
32.523	V	Stable	31.5		40	8.5	Pass	100.2	296	
146.394	V	Stable	28.8		40	11.2	Pass	100.4	233.9	
194.684	H	Stable	28		40	12	Pass	200	166.5	

DATA SHEET		Date	07-Mar-26
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI	Humid.	40 %RH
	Line conduction & Radiated emission	Tested by	H.Ota

1. Line conduction

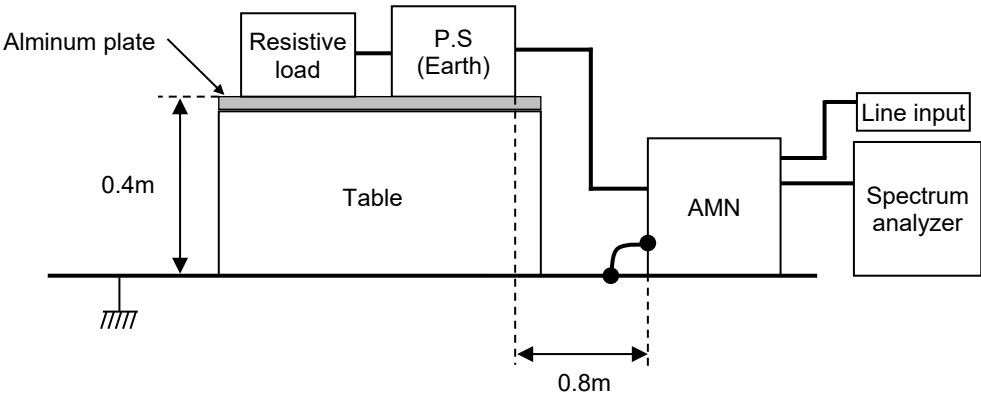


2. Radiated emission

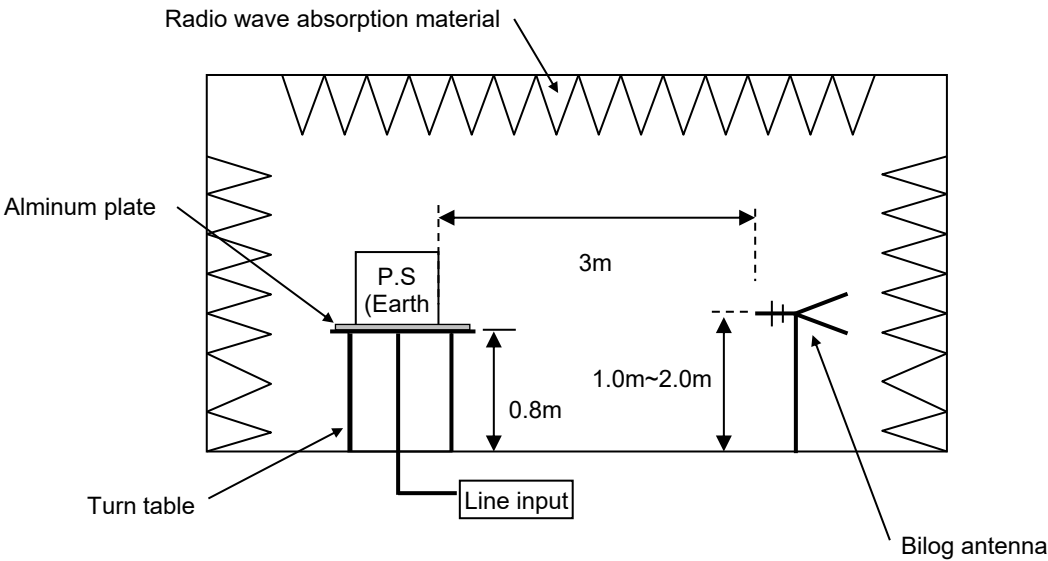

Conditions

Test : EMI
Model Name : PJA30F-5

1.LINE CONDUCTION

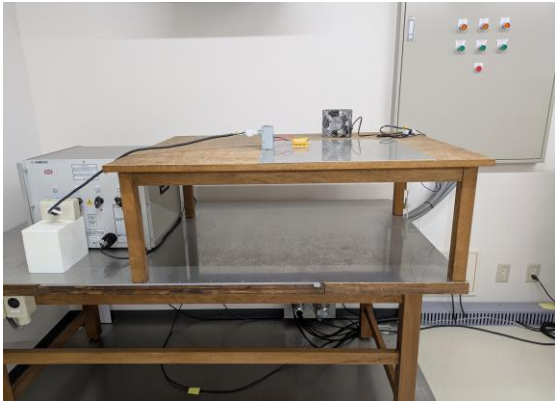

2.RADIATED EMISSION

