



DATA SHEET		Date	10-Apr-26
Model	PJA50F-12	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	H.Ota

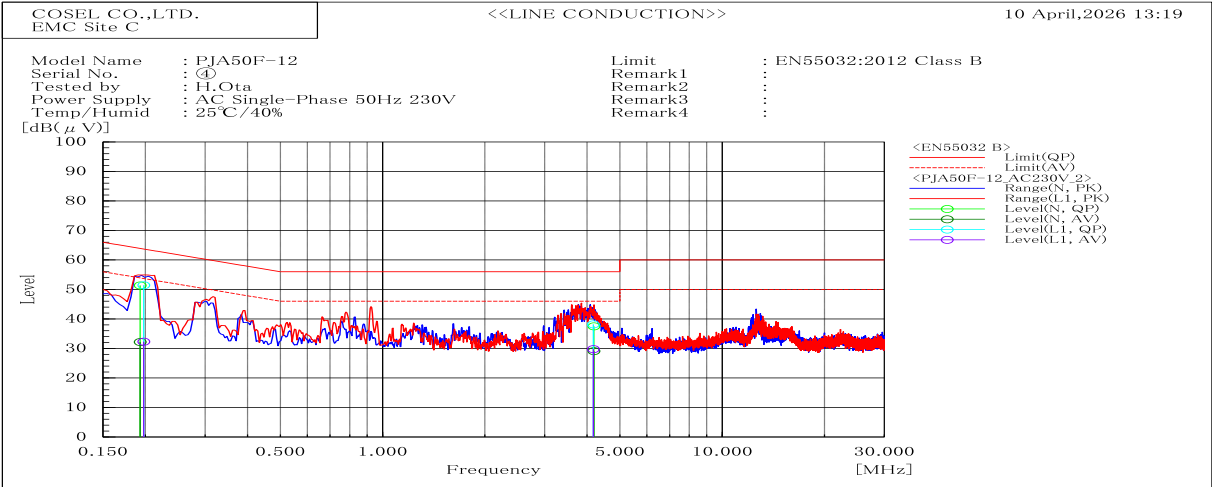


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.193	N	51.4	32.2	63.9	53.9	12.5	21.7	Pass	
4.186	N	37.5	29.1	56	46	18.5	16.9	Pass	
0.198	L1	51.4	32.3	63.7	53.7	12.3	21.4	Pass	
4.172	L1	38.2	29.8	56	46	17.8	16.2	Pass	

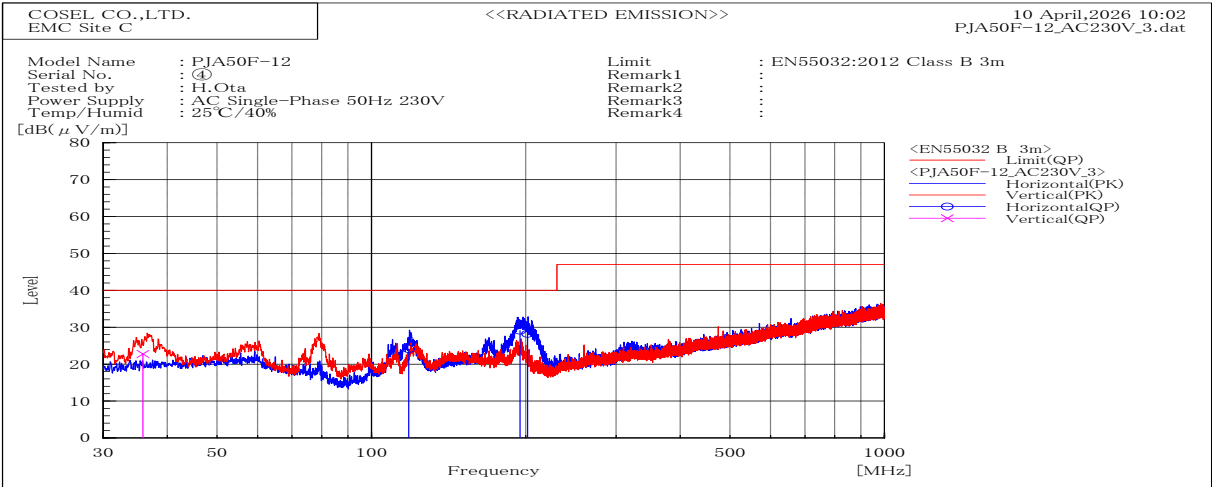


Frequency MHz	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height cm	Angle deg	Remark
			dB(μV/m) QP	dB(μV/m) QP	dB QP				
35.853	V	Stable	22.8	40	17.2	Pass	100	0	
118.247	H	Stable	24.1	40	15.9	Pass	200	351.2	
201.601	H	Stable	28.2	40	11.8	Pass	115.8	314.8	
194.801	H	Stable	29.1	40	10.9	Pass	108.4	188.5	

DATA SHEET		Date	10-Apr-26
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI	Humid.	40 %RH
	Line conduction & Radiated emission	Tested by	H.Ota

1. Line conduction

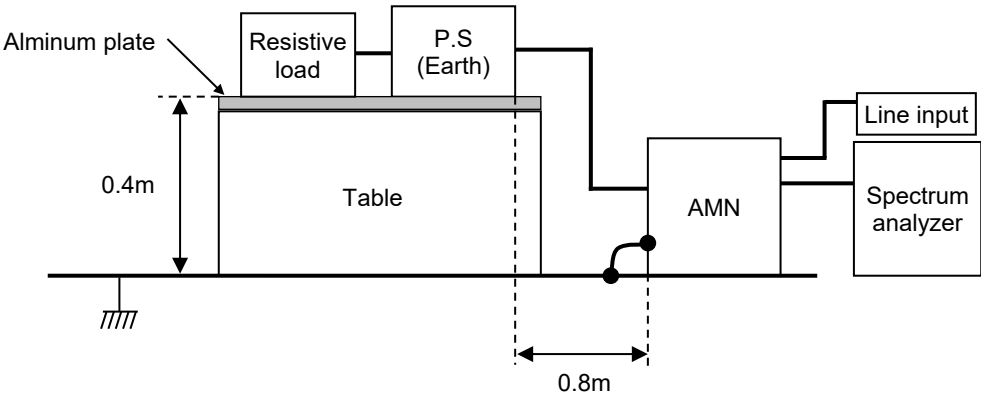

2. Radiated emission

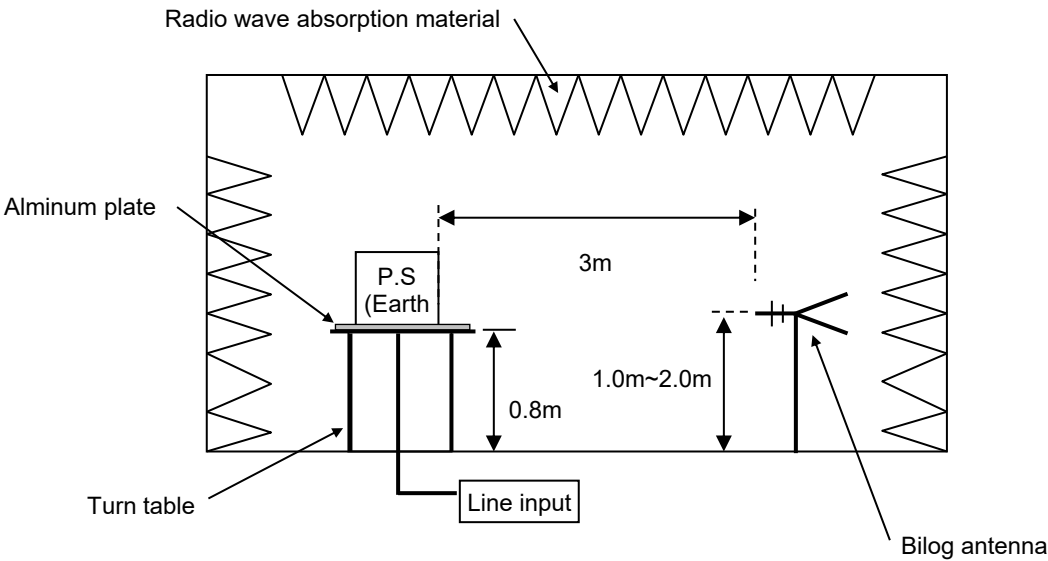

Conditions

Test : EMI
Model Name : PJA50F-12

1.LINE CONDUCTION



2.RADIATED EMISSION

