



DATA SHEET		Date	07-Apr-26
Model	PJA50F-15	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	H.Ota

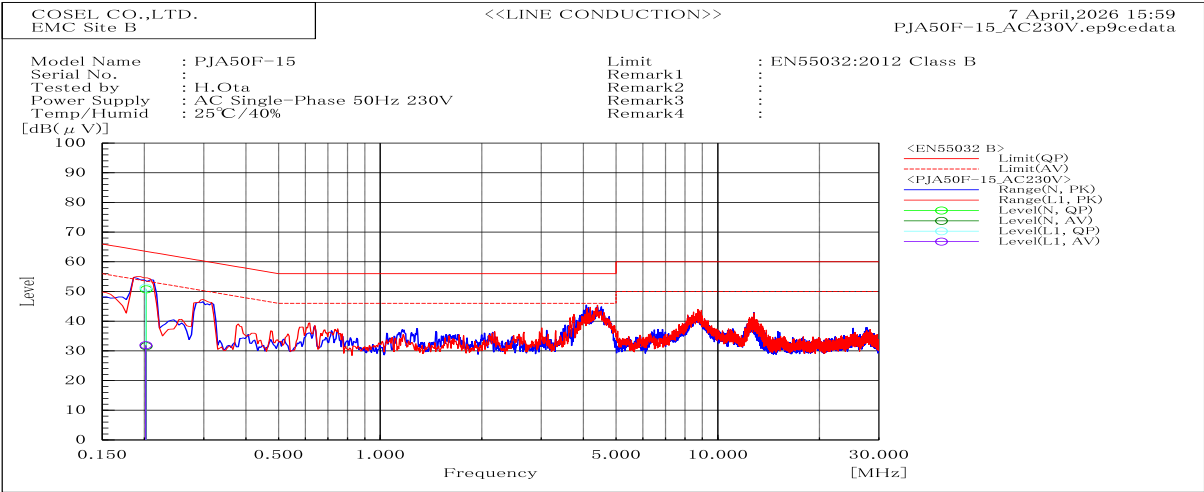


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.202	L1	51.3	31.9	63.5	53.5	12.2	21.6	Pass	
0.202	N	50.7	31.6	63.5	53.5	12.8	21.9	Pass	

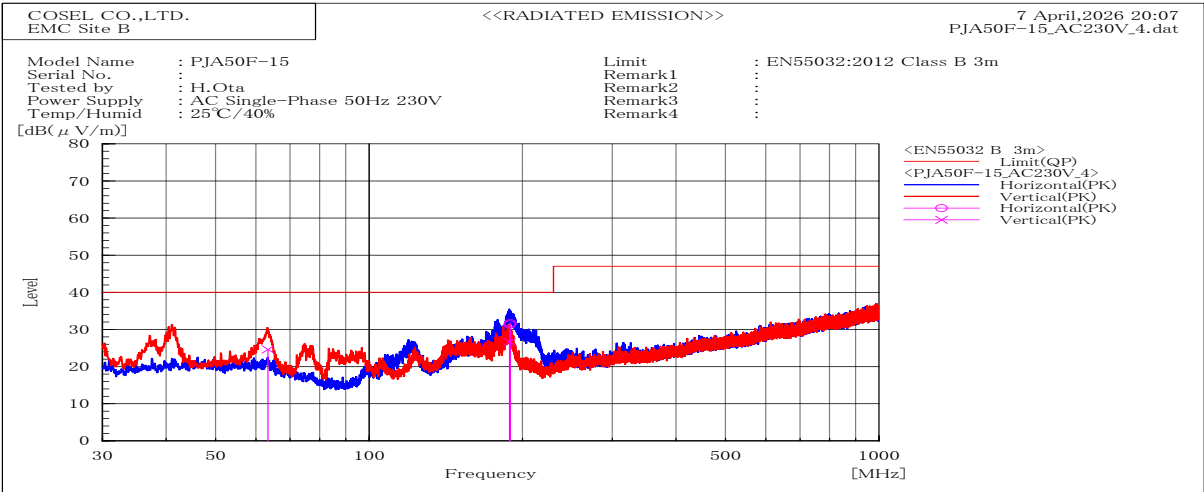


Frequency MHz	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height cm	Angle deg	Remark
			dB(μV/m) QP	dB(μV/m) QP	dB QP				
189.275	H	Stable	31.7	40	8.3	Pass	200	318.6	
188.551	V	Stable	26.7	40	13.3	Pass	164.1	260.9	
63.312	V	Stable	24.6	40	15.4	Pass	100	242.4	
188.652	H	Stable	31.4	40	8.6	Pass	199.7	329.9	

DATA SHEET		Date	07-Apr-26
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI	Humid.	40 %RH
	Line conduction & Radiated emission	Tested by	H.Ota

1. Line conduction

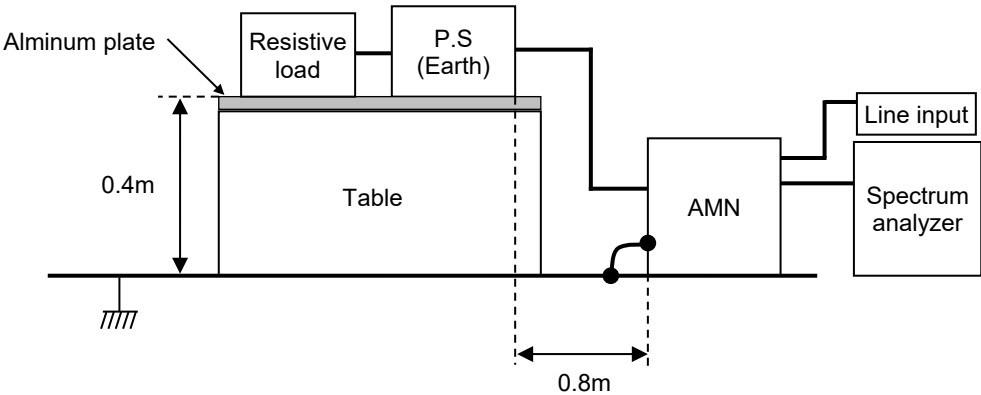

2. Radiated emission

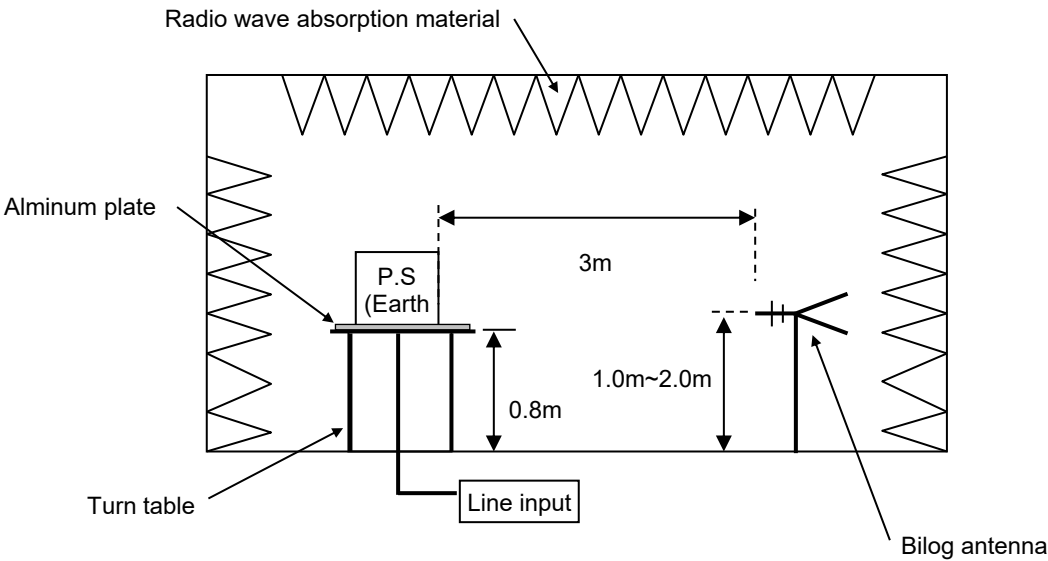

Conditions

Test : EMI
Model Name : PJA50F-15

1.LINE CONDUCTION



2.RADIATED EMISSION

