



DATA SHEET		Date	16-Apr-26
Model	PJA50F-24	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	H.Ota

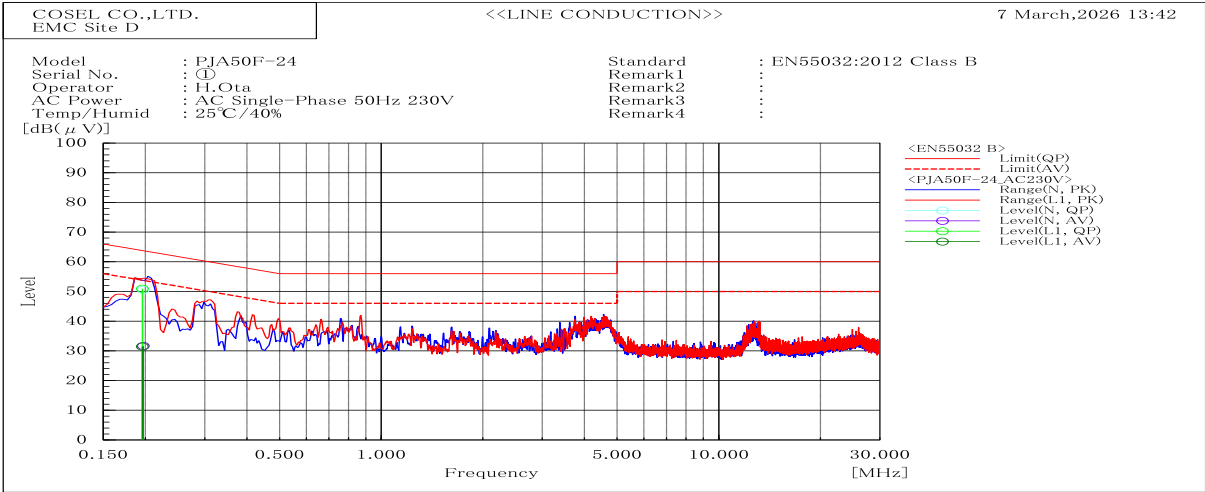


Frequency MHz	Line	Level		Limit		Margin		Pass/Fail	Remark
		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.197	N	50.5	31.7	63.7	53.7	13.2	22	Pass	
0.196	L1	50.9	31.4	63.8	53.8	12.9	22.4	Pass	

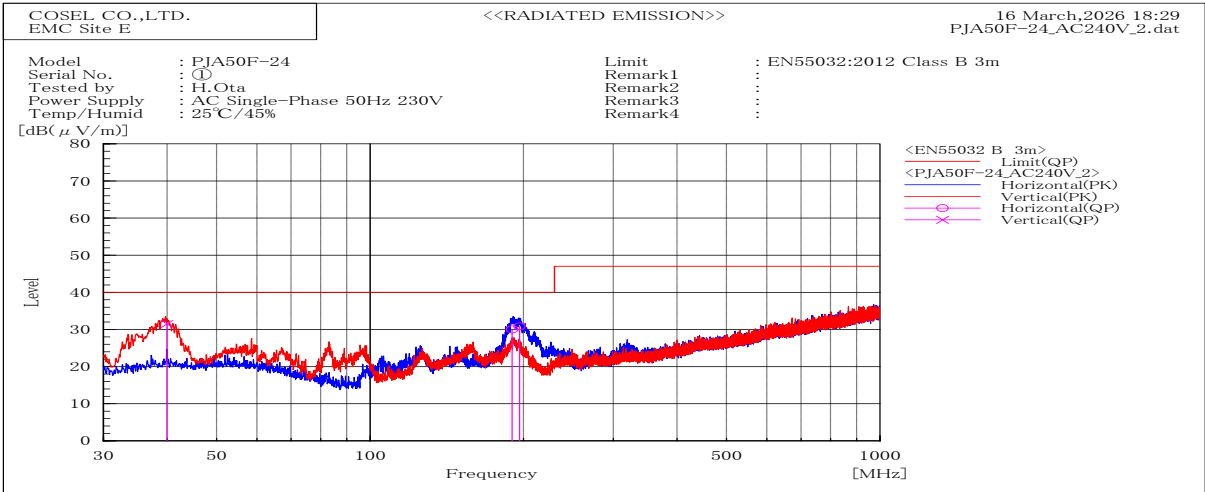


Frequency MHz	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height cm	Angle deg	Remark
			dB(μV/m) QP	dB(μV/m) QP	dB QP				
39.973	V	Stable	31.5	40	8.5	Pass	100	279.2	
189.907	H	Stable	30	40	10	Pass	199.7	317.4	
196.415	H	Stable	30.8	40	9.2	Pass	197.1	177.7	

DATA SHEET		Date	16-Apr-26
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI	Humid.	40 %RH
	Line conduction & Radiated emission	Tested by	H.Ota

1. Line conduction

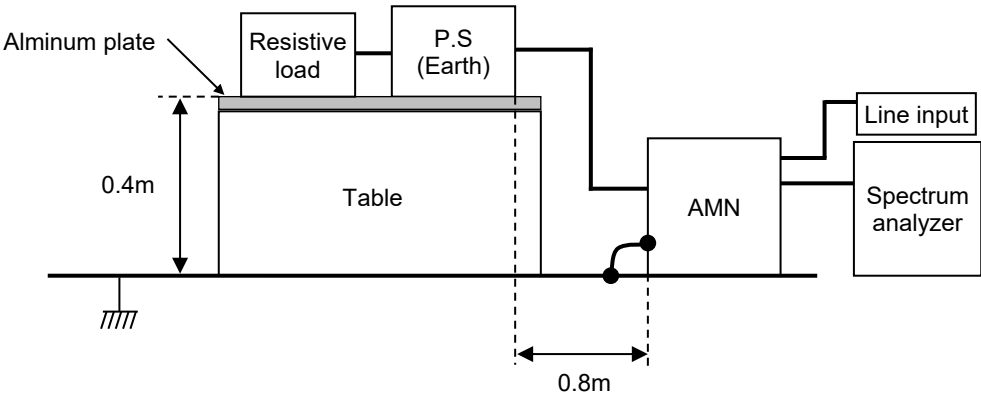

2. Radiated emission

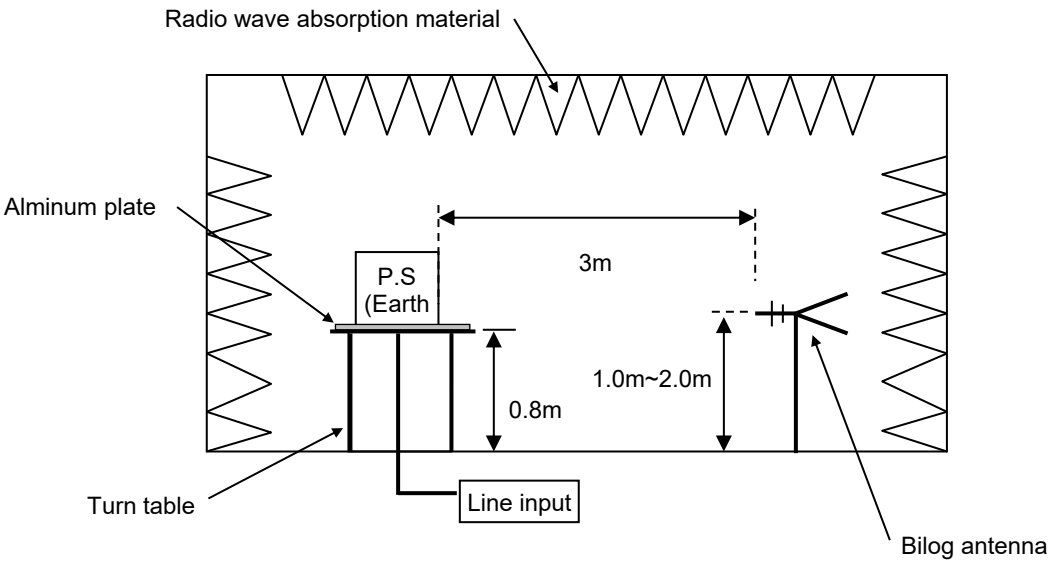

Conditions

Test : EMI
Model Name : PJA50F-24

1.LINE CONDUCTION



2.RADIATED EMISSION

