



DATA SHEET		Date	10-Apr-26
Model	PJA50F-5	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	H.Ota

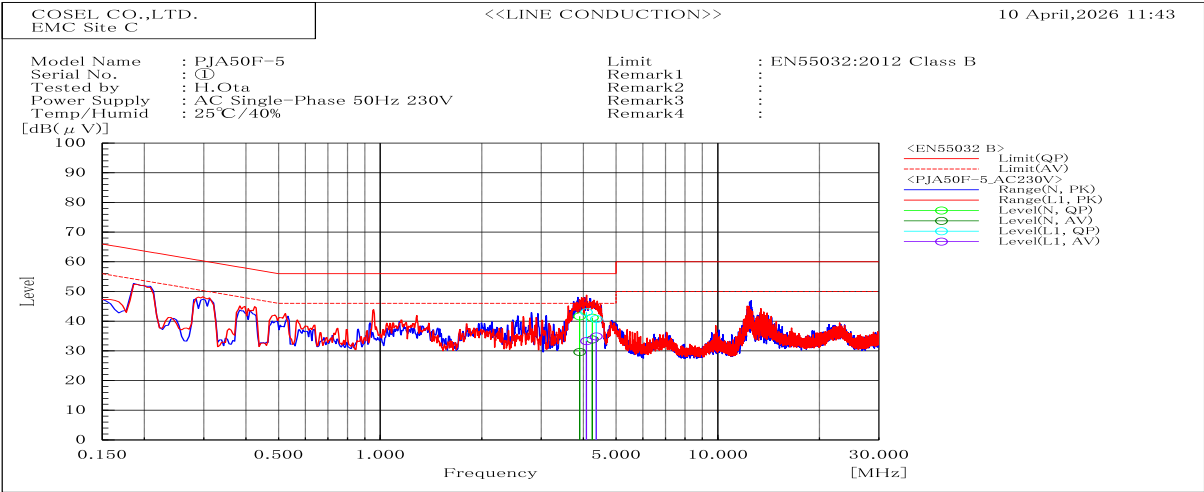


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
4.085	L1	43	33.3	56	46	13	12.7	Pass	
4.367	L1	40.7	34.9	56	46	15.3	11.1	Pass	
3.897	N	41.7	29.6	56	46	14.3	16.4	Pass	
4.25	N	41.2	33.8	56	46	14.8	12.2	Pass	

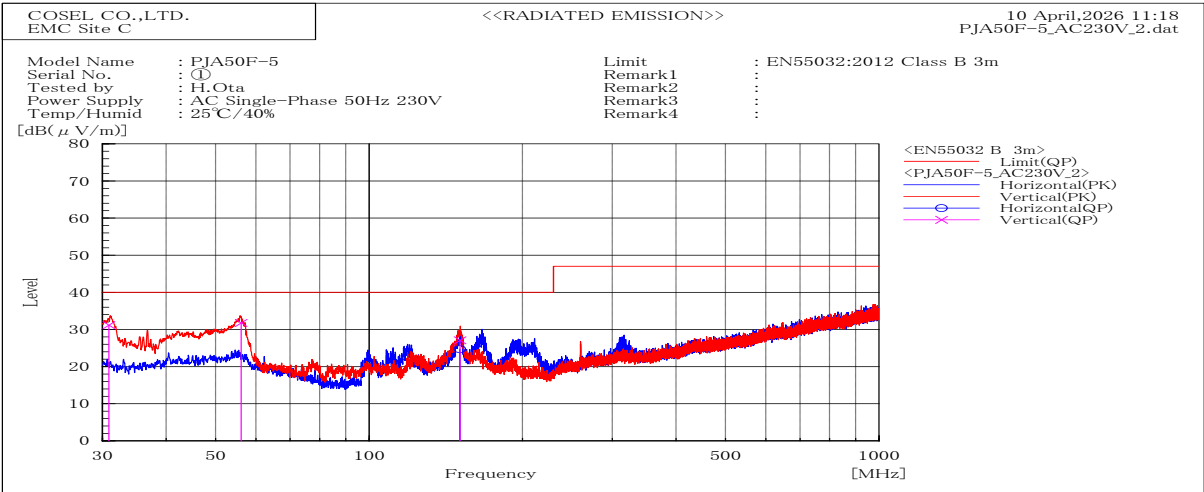


Frequency MHz	Polarization	Stability	Level dB(μV/m)		Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
30.892	V	Stable	31.2	40	8.8	Pass	100	202.8	
56.109	V	Stable	31.8	40	8.2	Pass	100	176.2	
150.661	H	Stable	24.7	40	15.3	Pass	199.7	321.1	
150.814	V	Stable	27.1	40	12.9	Pass	100	19.9	

DATA SHEET		Date	10-Apr-26
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI	Humid.	40 %RH
	Line conduction & Radiated emission	Tested by	H.Ota

1. Line conduction

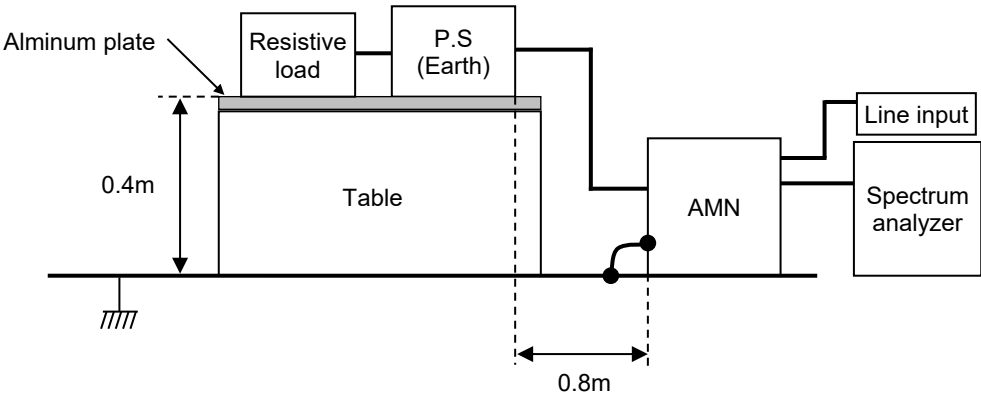

2. Radiated emission

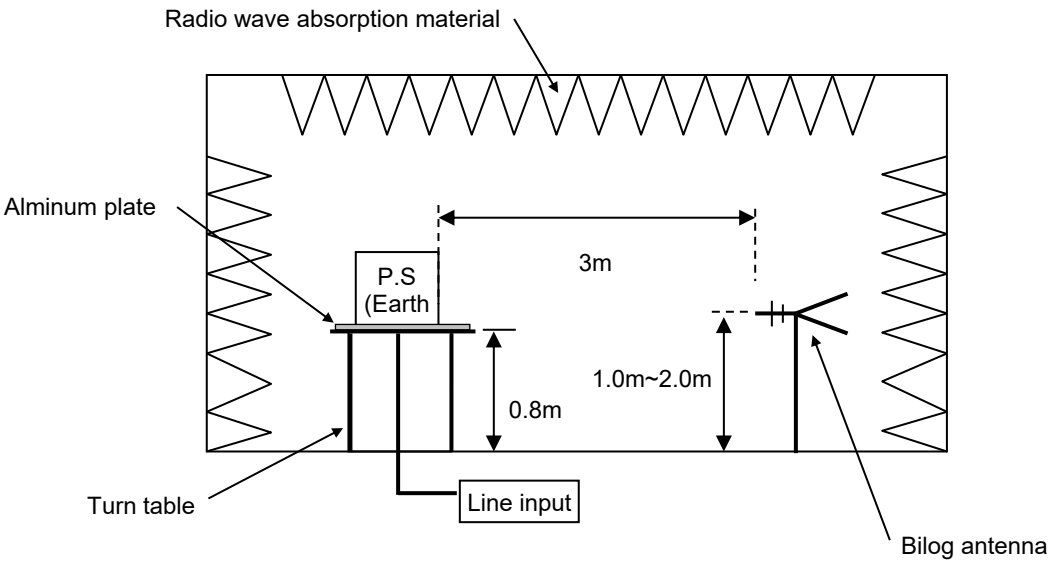

Conditions

Test : EMI
Model Name : PJA50F-5

1.LINE CONDUCTION



2.RADIATED EMISSION

