



DATA SHEET		Date	26-Jun-25
Model	UMA120F-36-Y	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45 %RH
		Tested by	Y.Sakai

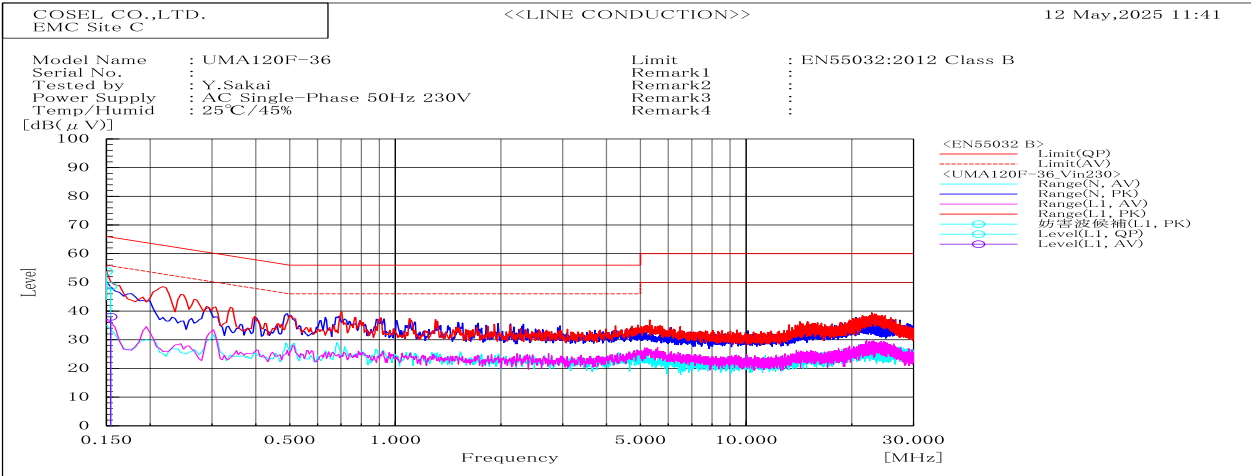


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.154	L1	48.7	38	65.8	55.8	17.1	17.8	Pass	

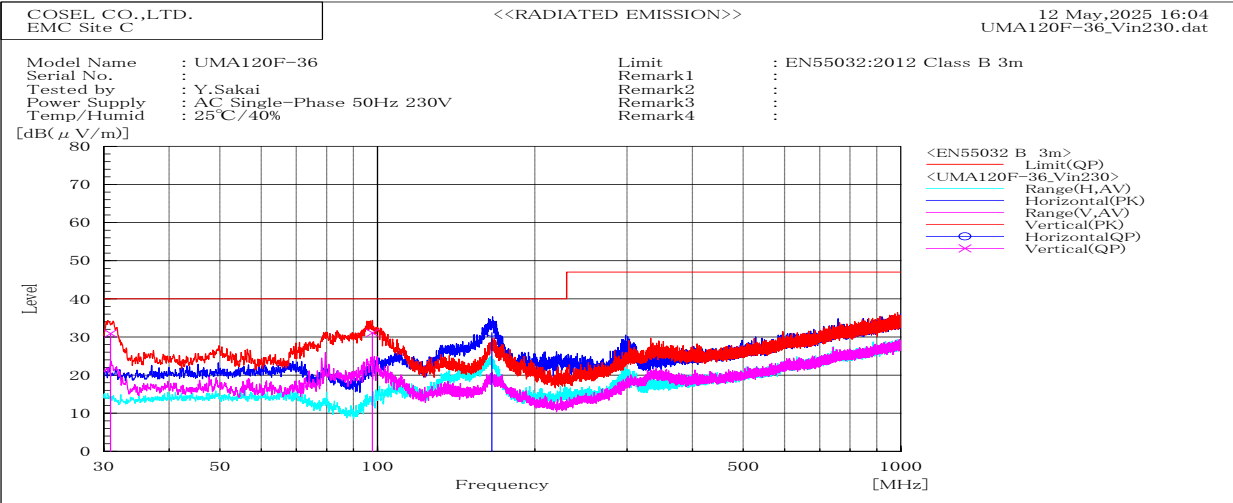


Frequency MHz	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height cm	Angle deg	Remark
			dB(uV/m)	dB(uV/m)	dB				
97.805	V	Stable	31.1	40	8.9	Pass	105.7	291.1	
165.448	H	Stable	31.1	40	8.9	Pass	194.4	352.3	
30.914	V	Stable	30.9	40	9.1	Pass	100	323.8	

DATA SHEET		Date	26-Jun-25
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45 %RH
		Tested by	Y.Sakai

1. Line conduction

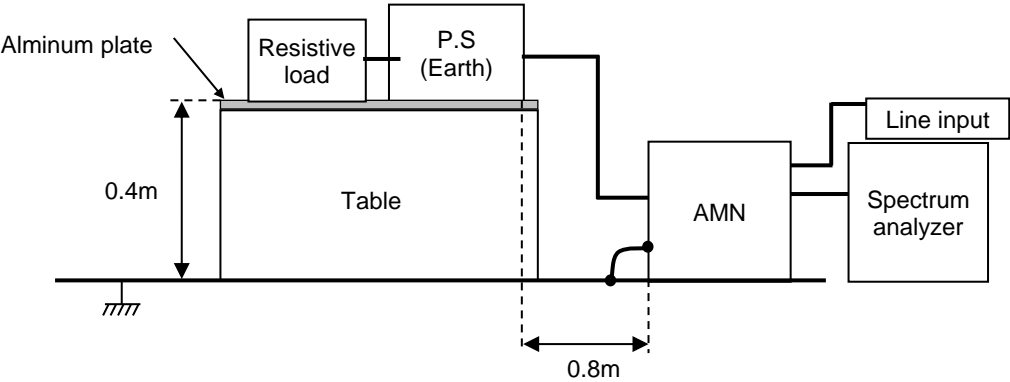

2. Radiated emission

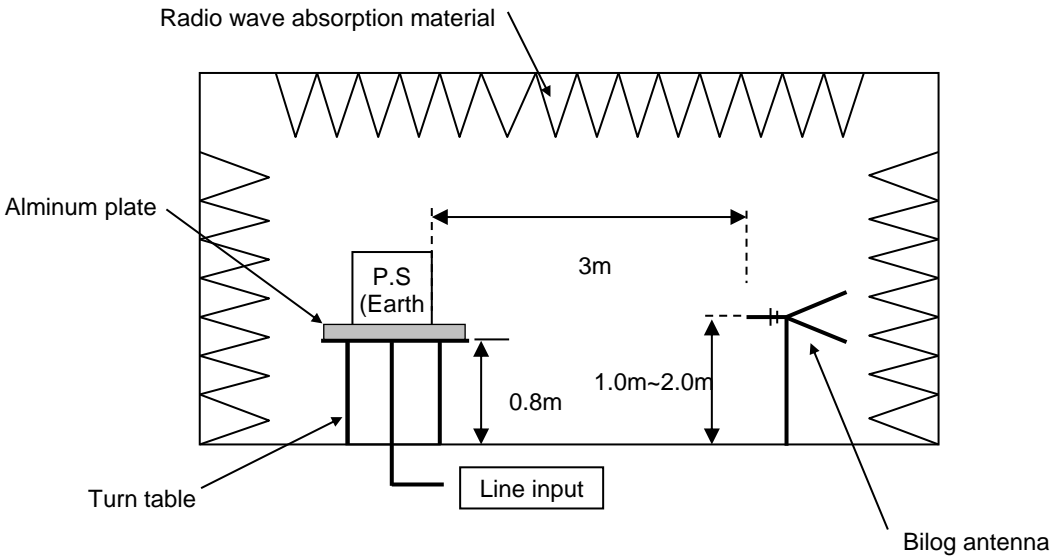


Conditions

Test : EMI
Model Name : UMA120F-36-Y

○Photographs of Test Set-Up

1. LINE CONDUCTION

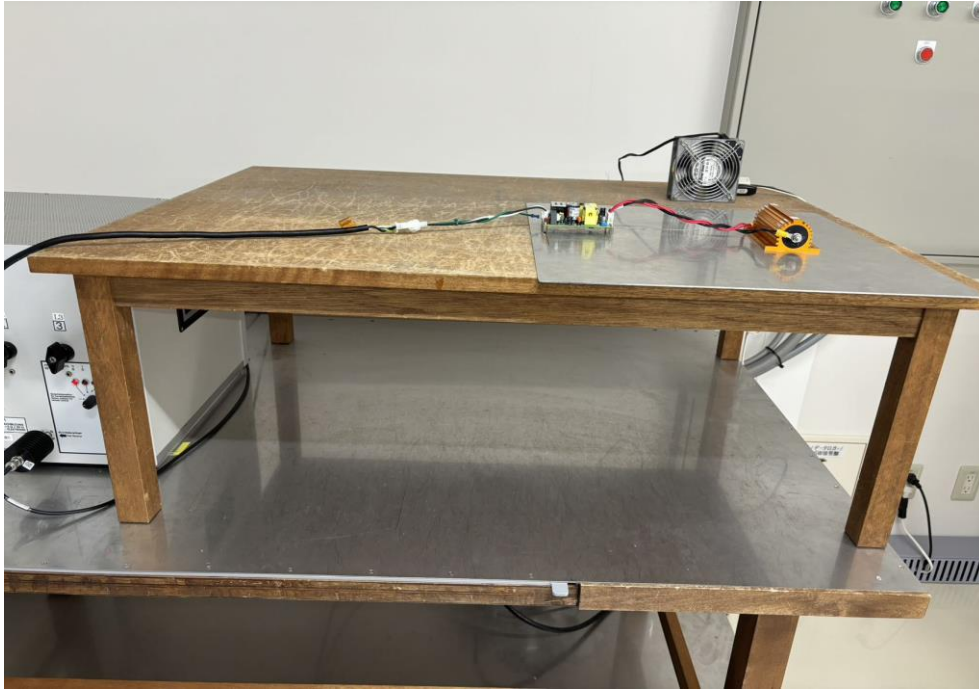

2. RADIATED EMISSION

